

IT'S ALL ABOUT AGOOD SYSTEM





CONTACT HEADQUARTERS GERMANY



Marco Massaro
Head of Sales
m.massaro@vosschemie.de
+49 (0) 41 22 / 717-205



Martin Schuster
Area Sales Manager Europe
m.schuster@vosschemie.de



Jessica Wedel Sales Carsystem International j.wedel@vosschemie.de +49 (0) 41 22 / 717-108



Gaby Büchner
Sales Carsystem International
g.buechner@vosschemie.de
+49 (0) 41 22 / 717-190



Steven Lück
Technical Support
s.lueck@vosschemie.de



A BRILLIANT SYSTEM

CARSYSTEM IS THE FIRST ADDRESS FOR ALL PRODUCTS AROUND THE BODY- AND PAINT REPAIR IN THE AUTOMOTIVE RANGE.

62 partners, 64 countries, more than 2,000 products – global demand has made us one of the leading suppliers of non-paint products for the automotive repair industry. This pole-position is the result of the uncompromising to quality and the consequence of more than 60 years of experience in the market.

As a trademark of VOSSCHEMIE, based in Uetersen near Hamburg / Germany, we benefit from decades of development and production of polyester fillers. Around these core competences we have constantly expanded our product range. Meanwhile we have everything on hand what you need for a competent and professional automotive body repair.

Good if everything comes from one source. Better when all products are precisely verified on each other. The best if certified quality secures constant standards (certified to DIN EN ISO 9001:2015).

This successful system has a name: CARSYSTEM

OUR **NEWS** AT A GLANCE.

NEW

INDEX

* and many more

MULTI GREEN RAPID



Page 061





Page 168

CC.21 X-PRESS FIVE



Page 098

FOAM*TAPE* T-SOFT



SCHUTZFOLIE SPF



AF.21 X-PERT



Page 103

FINISH C-99 KONTROLLSCHAUM



Page 135

OPENER FOR PUTTY AND FILLER CANS



Page 197



1K NC FILLER



Page 072







ABRASIVES	007
PUTTIES	051
MASKING	081
PAINTING	095
PAINT FINISH	129
BONDING & SEALING	151
CLEANING	165
PERSONAL SAFETY	175
ACCESSORIES	187

MINI RANDOM ORBITAL SANDER
ORBITAL SANDER SANDING BLOCK
H₂O SOFT F.19 TOP LINE BACK PAD
PROFLEX ABRASIVES FINISH
IPES V19 PREP & SCUEE P19 DRY COAT


RUPES V.19 PREP & SCUFF P.19 DRY COAT
PAD SANDING WATER TEC LINE
INTERFACE PAD RANDOM ORBITAL SANDER
SANDING BLOCKS





Sanding Disc P.19

Paper abrasive - 150 mm - 25 holes



Description

- Universal paper-sanding discCarsystem hole pattern 25-holes and oval center hole Aluminium oxide grain

Area of application

Suitable for corse to fine sanding

Sanding Strips P.19

Paper abrasive – 70 × 198 mm

Description

- Paper-based sanding stripsAluminium oxide grain

Area of application

Suitable for corse to fine sanding

Benefits

- High cutting power
- High efficiency

Application advice

We recommend using a dust extraction system

ArtNo.	Specification	SP	MOQ
156.670	P 40	50	1000
156.671	P 60	50	1000
156.672	P 80	50	1000
156.673	P 120	50	1000
156.674	P 150	50	1000
156.675	P 180	50	1000
156.676	P 220	50	1000
156.677	P 240	50	1000
156.678	P 320	50	1000
156.679	P 400	50	1000

Benefits

- High cutting powerHigh efficiency

ArtNo.	Specification	SP	MOQ
156.357	P 40	50	500
156.358	P 60	50	500
156.359	P 80	50	500
156.361	P 120	50	500
156.362	P 150	50	500
156.363	P 180	50	500
156.364	P 220	50	500
156.365	P 240	50	500
156.367	P 320	50	500
156.368	P 360	50	500
156.369	P 400	50	500
156.370	P 500	50	500
156.371	P 600	50	500

Sanding Strips P.19

Paper abrasive - 70 × 400 mm

Description

- Paper-based sanding stripsAluminium oxide grain

Area of application

Suitable for corse to fine sanding

Benefits

- High cutting power High efficiency
- Application advice


■ We recommend using a dust extraction system

ArtNo.	Specification	SP	MOQ
156.680	P 40	50	500
156.681	P 60	50	500
156.682	P 80	50	500
156.683	P 120	50	500
156.684	P 150	50	500
156.685	P 180	50	500
156.686	P 220	50	500
156.687	P 240	50	500
156.688	P 320	50	500
156 689	P.400	50	500

For industrial and professional use only.

Sanding Disc F.19

Film abrasive - 150 mm - 25 holes



Description

- High performance film-based sanding disc
- Carsystem hole pattern 25-holes and oval center hole Aluminium oxide grain

Area of application

Suitable for corse to fine sanding

Benefits

- Extremely high and long lasting cutting power
- Universal high performance sanding disc

ArtNo.	Specification	SP	MOQ
156.046	P 80	50	1000
156.048	P 120	50	1000
156.049	P 150	50	1000
156.050	P 180	50	1000
156.051	P 220	50	1000
156.052	P 240	50	1000
156.054	P 320	50	1000
156.055	P 360	50	1000
156.056	P 400	50	1000
156.057	P 500	50	1000
156.058	P 600	50	1000
156.059	P 800	50	1000

Sanding Disc F.19

Film abrasive - 77 mm



Description

- High performance film-based sanding disc Aluminium oxide grain
- Area of application
- Suitable for corse to fine sanding

Benefits

- Extremely high and long lasting cutting power Universal high performance sanding disc
- Specification Art.-No. SP MOQ 156.647 P80 50 1000 156.648 P 120 50 1000 P 150 156.649 50 1000 156.650 P 180 50 1000 156.651 P 220 50 1000 156.652 P 240 50 1000 156.653 P 320 50 1000 156.654 P 400 50 1000 156.655 P 500 50 1000 156.903 P800 50 1000

Sanding Disc F.19 Finish

Film abrasive - 152 mm - 15 holes



Description

- High performance film-based sanding disc
- Special coating
 Carsystem hole pattern 15 holes and oval center hole
- Aluminium oxide grain

Area of application

- Blending
 Matting of surfaces
 Finish (Removing of imperfections)

Benefits

- Extremely fast removing of surface structure and imperfections
 Special coating provides an extra fine and even sanding pattern
 Perfect levelling of the transition zone between new and old paint layers
 Reduces the reworking time in the finishing process

Specification	SP	моо
P 1000	50	1000
P 1200	50	1000
P 1500	50	1000
P 2000	50	1000
	P 1000 P 1200 P 1500	P 1000 50 P 1200 50 P 1500 50

Sanding Disc F.19 Finish

Film abrasive - 77 mm



Description

- High performance film-based sanding disc
 Special coating
 Aluminium oxide grain

Area of application

- Blending
 Matting of surfaces
 Finish (Removing of imperfections)

Benefits


- Extremely fast removing of surface structure and imperfections
 Special coating provides an extra fine and even sanding pattern
 Perfect levelling of the transition zone between new and old paint layers
 Reduces the reworking time in the finishing process

ArtNo.	Specification	SP	MOQ
156.904	P 1500	50	1000
156.905	P 2000	50	1000



Sanding Disc F.19 Soft

Film abrasive – 152 mm – Multi hole



Description

- High performance film-based sanding disc with foam back
 Multi hole
 Aluminium oxide grain

Area of application

- Filler finish
- Blending
 Matting of surfaces

Benefits

- Surface structure is sanded evenly
- Extremely high and long lasting cutting power
 Comfortable sanding due to the foam back

ArtNo.	Specification	SP	MOQ
156.933	P 320	30	600
156.934	P 400	30	600
156.935	P 500	30	600
156.936	P 600	30	600
156.937	P 800	30	600

For industrial and professional use only.

Paper abrasive - Roll - 115 × 125 mm

ArtNo.	Specification	SP	MOQ
152.689	P 150	1	5
152.690	P 180	1	5
152.691	P 240	1	5
152.692	P 320	1	5
152.693	P 400	1	5
152.694	P 500	1	5
152.695	P 600	1	5
152.696	P 800	1	5



Description

- Paper-based abrasive with foam back
 Roll with tear-off perforation
 200 tear-offs / box

Area of application

- Manual sanding of curves and hard-to-reach areas
 Suitable from coarse to fine sanding

Tec Line N20 Net sanding strips 70 × 400 mm



Description

- Net sanding stripesSpecial coatingAluminium oxide grain

Area of application

Suitable for every sanding application on bodyfillers from coarse to fine sanding

- Due to the perforation of the individual stripes, the Tec Line N20 can be used on both 70 × 400 mm and 70 × 200 mm tools
 Extremely dust-reduced sanding
 The characteristic of the net provides a very long lifetime

ArtNo.	Specification	SP	MOQ
157.438	P 80	50	200
157.439	P 120	50	200
157.440	P 180	50	200
157.441	P 240	50	200
157.442	P 320	50	200
157.443	P 400	50	200

Tec Line Pro Finish

Net abrasive - 150 mm



Description

■ Net abrasive disc with a Velcro® foam back

Area of application

- Perfect for blending
 Matting of surfaces
 Finish
 Wet use (recommended)

Benefits

- Extremely good dust extraction in dry use
 Almost dust-free sanding
 Perfect water transportation in wet use
 Extremely fine and even sanding pattern

_				
ı	ArtNo.	Specification	SP	MOQ
	152.983	P 1000	20	120
	152.984	P 2000	20	120
	153.256	P 3000	20	120

Topline WP S

Paper abrasive - 230 × 280 mm



Description

- Wet sanding paper
- Silicon carbide grain
 Flexible latex reinforced A-paper P80 P180
- Smooth latex reinforced C-paper P220 P2000

Area of application

Wet sanding of filler coated or painted surfaces

Topline WP A

Paper abrasive – 230 × 280 mm



Description

- Wet sanding paper
- Aluminium oxide grain
 Flexible latex reinforced A-paper

Area of application

Wet sanding of painted surfaces

Benefits

Very high cutting power due to the silicon carbide grain
 Highest flexibility after short soaking time due to the high quality latex reinforced paper

ArtNo.	Specification	SP	MOQ
136.676	P 80	50	500
136.677	P 120	50	500
136.678	P 180	50	500
136.679	P 220	100	1000
136.680	P 240	100	1000
136.681	P 280	100	1000
136.682	P 320	100	1000
136.683	P 360	100	1000
136.684	P 400	100	1000
136.685	P 500	100	1000
136.686	P 600	100	1000
136.687	P 800	100	1000
136.688	P 1000	100	1000
136.689	P 1200	100	1000
136.690	P 1500	100	1000
136.691	P 2000	100	1000


Benefits

- Very fine and even sanding pattern
- Long lifetime

ArtNo.	Specification	SP	MOQ
136.671	P 600	100	1000
136.672	P 800	100	1000
136.674	P 1200	100	1000

Classicline Soft Pad

Foam abrasive – 140 × 115 mm

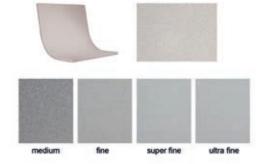

Description

- Soft pad with foam back
- Aluminium oxide grain

Area of application

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application

 Medium and fine: prior to filler application
- Super fine and ultra fine: prior to paint application

Benefits

Very flexible

138.927


Perfect adaption on every curve
 For wet or dry use

ArtNo.	Specification	SP	моо
138.924	medium / P 220 - P 280	40	40
138.925	fine / P 320 - P 400	40	40
138.926	super fine / P 400 - P 500	40	40

ultra fine / P 800 - P 1200

Topline Soft Pad

Foam abrasive - 140 × 115 mm

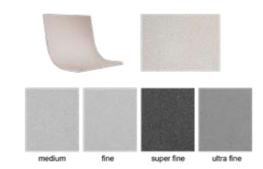

Description

- Soft pad with foam backAluminium oxide grain

Area of application

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
 Medium: prior to filler application
 Fine and ultra fine: prior to paint application


Benefits

- Very fine sanding pattern
- Very flexible
 Perfect adaption on every curve

ArtNo.	Specification	SP	MOQ
126.251	medium / P 220 - P 280	40	40
126.252	fine / P 400 - P 500	40	40
126.253	super fine / P 600 - P 800	40	40
126.254	ultra fine / P 1000 - 1200	40	40





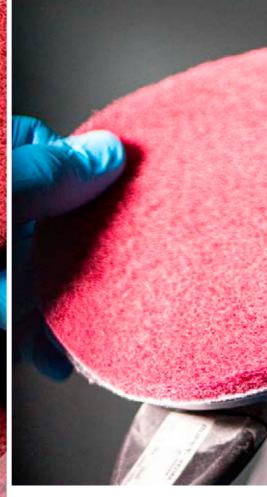

Sanding Fleece V.19

Sanding Fleece - Roll - 115 mm × 10 m



Description

- Sanding Fleece with three dimensional structure
 The synthetic resin soaks through the fiber mat and distributes the sanding grain all over

Area of application

- Matting of corners, roundings or sharp edges prior to filler or paint application
 Red very fine: prior to filler application
 Grey ultra fine: prior to paint application

Benefits

- High cutting power
 Suitable for wet and dry sanding
 On a roll for easy cut off in the needed lenght

Application advice

Perfectly suitable with the Carsystem matting pastes

ArtNo.	Specification	SP	MOQ
156.039	very fine / red	1	10
156.040	ultra fine / grey	1	10

Sanding Fleece V.19

Sanding Fleece pad - 115 × 230 mm



Description

- Sanding fleece with three dimensional structure
 The synthetic resin soaks through the fleece and distributes the sanding grain all over

Area of application

- Matting of corners, roundings or sharp edges
- prior to filler or paint application

 Red very fine: prior to filler application
- Grey ultra fine: prior to paint application

Benefits

- High cutting powerSuitable for wet and dry sanding

Application advice

■ Perfectly suitable with the Carsystem matting pastes

ArtNo.	Specification	SP	MOQ
156.041	very fine / red	25	200
156.042	ultra fine / grey	25	200

For industrial and professional use only.

Sanding Fleece V.19

Sanding Fleece - Disc



Description

- Sanding fleece with three dimensional structure
- The synthetic resin soaks through the fleece and distributes the sanding grain all over

 The synthetic resin soaks through the fleece and distributes the sanding grain all over

Area of application

- Matting and dust removal on large surfaces by machine
 Red very fine: prior to filler application
 Grey ultra fine: prior to paint application

- Removes dust and prepares the surface for filler or paint application
 Suitable for wet and dry sanding

Application advice

■ Perfectly suitable with the Carsystem matting pastes

ArtNo.	Specification	SP	MOQ
156.691	very fine / red / 80 mm	25	1000
156.690	ultra fine / grey / 80 mm	25	1000
156.044	very fine / red / 150 mm	20	160
156.045	ultra fine / grey / 150 mm	20	160

Tec Line Mattflex Premium

Sanding Fleece - Roll - 115 mm × 10 m



Description

■ The synthetic resin soaks through the fleece and distributes the sanding grain all over

Area of application

- Matting and sanding of hard-to-reach areas, smallest corners,
- folds and dimples prior to filler or paint application

 Red very fine: prior to filler application
- Grey ultra fine: prior to paint application

- **Benefits**
- High flexibility
- On a roll for easy cut off in the needed length

Application advice

■ Perfectly suitable with the Carsystem matting pastes

ArtNo.	Specification	SP	MOQ
151.616	very fine / red	1	5
151.617	ultra fine / grey	1	5

Tec Line Mattflex Pad

Sanding fleece - Pad - 115 × 230 mm



Description

- Sanding fleece with three dimensional structure
 The synthetic resin soaks through the fleece and
- distributes the sanding grain all over

Area of application

- Matting and sanding of hard-to-reach areas, smallest corners,
- folds and dimples prior to filler or paint application

 Red very fine: prior to filler application
- Black extra fine: prior to paint appliaction
- Grey ultra fine: prior to paint application especially for blending zones
 Gold micro fine: prior to paint application especially for blending zones

Benefits

- Extremely fine sanding patternVery thin and extremely flexible
- Suitable for wet and dry sanding

Application advice

■ Perfectly suitable with the Carsystem matting pastes

ArtNo.	Specification	SP	MOQ
152.686	very fine / red	25	100
157.444	extra fine / black	25	100
152.687	ultra fine / grey	25	100
152.688	micro fine / gold	25	100

Tec Line Matt Matting Mousse

Matting paste

Description

■ Water-based matting paste

Area of application

- Blending
- Matting of transition zones
- Degreasing and cleaning of body parts

- Suitable for metal or plastic parts
- Sanding, cleaning and degreasing in one step
 Improves the adhesion of the paint layer

Art.-No.

151.947

Perfect matting result
 Removes silicones and waxes from the surface

Specification

light grey / 1,0 kg



SP

1

MOQ

6

BITE

Prep & Scuff

Matting paste

Description

■ Water-based matting paste

Area of application

- Blending
- Matting of transition zones Degreasing and cleaning of body parts

- Sanding, cleaning and degreasing in one step
 Improves the adhesion of the paint layer
- Even matting
- Removes silicones and waxes from the surface

Application advice

Hard-to-reach areas can be treated with the Prep-brush (Art.-No.: 138.301)



ArtNo.	Specification	SP	MOQ
137.547	light green / 1.3 kg	1	6
137.548	light green / 5 kg	1	4
137.779	Dispenser for 5 kg	1	1

Bite

Matting paste for plastics

Description

- Water-based matting pasteContains natural minerals and special
- degreasing components for plastics

Area of application

■ Preparing of plastic parts prior to paint application

Benefits

- Acts very antistaticAvoids multiple tempering processes

Application advice

Hard-to-reach areas can be treated with the Prep-brush (Art.-No.: 138.301)

ArtNo.	Specification	SP	MOQ
138.807	grey / 560 g	1	6

Prep-Brush

Special brush

Description

Special brush for matting pastes

Area of application


■ For applying matting pastes on hard-to-reach areas



ArtNo.	Specification	SP	MOQ
138.301	4 cm	1	36

ProFLEX Jupiter

Film abrasive - 152 mm - 15 holes



Description

- Ultraflexible soft film disc
- 15 holesAluminium oxide grain

Area of application

- Dry sandingFiller finish
- BlendingMatting of surfaces

Benefits

- Ultraflexible basis adapts perfectly to the surface
 Surface structure is treated extremely gentle
- Extremely fine sanding patternReduces the polishing time


Application advice

- We recommend the use of the Micro Velcro®
 We recommend an intermediate cleaning of
- the abrasive surface with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.449	P 600	50	1000
154.450	P 800	50	1000
154.451	P 1000	50	1000
154.452	P 1200	50	1000
154.453	P 1500	50	1000
153.469	P 2000	50	1000
153.470	P 2500	50	1000
153.471	P 3000	50	1000
156.939	P 4000	50	1000

ProFLEX Jupiter

Film abrasive - 75 mm



Description

- Ultraflexible soft film disc
- Aluminium oxide grain

Area of application

- Dry sandingFiller finish
- Matting of surfaces

Benefits

- Ultraflexible basis adapts perfectly to the surface
- Surface structure is treated extremely gentle
 Extremely fine sanding pattern
- Reduces the polishing time

Application advice

- We recommend the use with Micro Velcro®
- We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.444	P 600	50	1000
154.445	P 800	50	1000
154.446	P 1000	50	1000
154.447	P 1200	50	1000
154.448	P 1500	50	1000
153.466	P 2000	50	1000
153.467	P 2500	50	1000
153.468	P 3000	50	1000
156.946	P 4000	50	1000

PROFLEX Jupiter

Film abrasive - 152 mm



Description

- Ultraflexible soft film disc
- Aluminium oxide grain

Area of application

- Dry sandingFinish

Benefits

- Ultraflexible basis adapts perfectly to the surface
 Surface structure is treated extremely gentle
- Extremely fine sanding patternReduces the polishing time

Application advice

- We recommend the use with micro Velcro®
 We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.660	P 1500	50	1000
154.661	P 2000	50	1000
154.662	P 2500	50	1000
154.663	P 3000	50	1000

PROFLEX Jupiter

Film abrasive - 34 mm



Description

- Ultraflexible soft film sanding disc
 Aluminium oxide grain

Area of application

- Removing of small scratches and imperfections
- Flattening of removed imperfections

Benefits

- Ultraflexible basis adapts perfectly to the surface
- Surface structure is treated extremely gentle
 Extremely fine sanding pattern
 Reduces the polishing time

Application advice


- We recommend the use of the PRoFLEX Interface Pads hard ZK/CK ■ We recommend an intermediate cleaning of the abrasive surface
- with a microfiber cloth

_				
ı	ArtNo.	Specification	SP	MOQ
	154.440	P 1500	100	2000
	154.441	P 2000	100	2000
	154.442	P 2500	100	2000
	154.443	P 3000	100	2000



PROFLEX Jupiter Soft H2O

Film abrasive - 152 mm - Multi hole

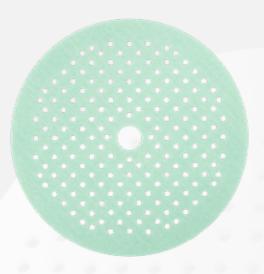

Description

- Ultraflexible soft film disc with flexible foam back
- Aluminium oxide grain

Area of application

- Flattening of removed imperfections
- Wet sanding

Benefits

- Surface structure is treated extremely gentle
 Extremely fine sanding pattern reduces the polishing time
- Comfortable sanding due to foam back


Application advice

■ We recommend using the PRoFLEX Jupiter Soft H₂O in combination with the CS Sanding Water SW20

ArtNo.	Specification	SP	MOQ
156.515	P 2500	15	300
156.516	P 3000	15	300
156.517	P 4000	15	300

PROFLEX Jupiter Soft H2O

Film abrasive - 77 mm - Multi hole



Description

- Ultraflexible soft film disc with flexible foam back
- Aluminium oxide grain

Area of application

- Finish
- Flattening of removed imperfections

Benefits

- Surface structure is treated extremely gentle
- Extremely fine sanding pattern reduces the polishing time
- Comfortable sanding due to foam back


Application advice

■ We recommend using the ProFLEx Jupiter Soft H₂O in combination with the CS Sanding Water SW20

ArtNo.	Specification	SP	MOQ
156.524	P 2500	15	300
156.525	P 3000	15	300
156.526	P 4000	15	300

PROFLEX Jupiter Soft

Film abrasive - 152 mm - Multi hole



Description

- Ultraflexible soft film disc with flexible foam back
- Multi holeAluminium oxide grain

Area of application

- Filler finish
- Blending
- Matting of surfacesSuitable for dry and wet sandingManual or machine use

Benefits

- Surface structure is treated extremely gentle
 Extremely fine sanding pattern
 Comfortable sanding due to foam back

Application advice


- We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth

 We recommend using the CS Sanding Water SW20 for wet sanding

ArtNo.	Specification	SP	MOQ
156.509	P 600	15	300
156.510	P 800	15	300
156.511	P 1000	15	300
156.512	P 1200	15	300
156.513	P 1500	15	300
156.514	P 2000	15	300

PROFLEX Jupiter Soft

Film abrasive – 75 mm – multihole



Description

- Ultra flexible soft film disc with flexible foam back
 Multi hole
- Aluminium oxide grain

Area of application

- Matting surfaces
- Suitable for dry and wet sanding
 Manual or machine use

Benefits

- Surface structure is treated extremely gentle
 Extremely fine sanding pattern
 Comfortable sanding due to foam back

Application advice

- We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth

 We recommend using the CS Sanding Water SW20 for wet sanding

ArtNo.	Specification	SP	MOQ
156.522	P 1500	15	300
156.523	P 2000	15	300



Sanding Water SW20

For industrial and professional use only.

Sanding water



Description

- Sanding waterFree of silicones

Area of application ■ Wet sanding on clearcoat

Benefits

- Extends the lifetime of the abrasive
 Optimizes the wetting of the abrasive
 Foaming prevents the tying of the sanding dust with the water

Application advice

■ We recommend using the Carsystem Sanding Water SW20 in combination with PROFLEX Jupiter Soft H₂O

ArtNo.	Specification	SP	MOQ
157.446	incl. spray nozzle / 11	1	14
157.447	51	1	4

PROFLEX Neptune

Film abrasive - 130 × 170 mm



Description

- Ultraflexible soft film sanding sheet
- Aluminium oxide grainPerforated in the middle

Area of application

- Filler finish
- Blending
- Matting and flattening of hard-to-reach areas, smallest corners, folds and dimples


Benefits

■ We recommend the use of the ProFLEX Neptune Pads with micro Velcro®

ArtNo.	Specification	SP	MOQ
153.472	P 600	50	1000
153.473	P 800	50	1000
154.454	P 1000	50	1000
154.455	P 1200	50	1000
153.474	P 1500	50	1000

ProFLEX Neptune Soft

Film abrasive – 130 × 85 mm – Multihole

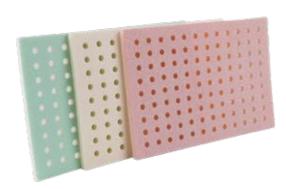

Description

- Ultraflexible soft film sheet with flexible foam back
- Multihole
- Aluminium oxide grain

Area of application

- Filler finish
- Hiller Tinish
 Blending
 Matting and flattening of hard-to-reach areas, smallest corners, folds and dimples
 Suitable for dry and wet sanding

- Ultraflexible basis adapts perfectly to the surface
 Extremely fine sanding pattern

Application advice

NEW

Benefits

- Ultraflexible basis adapts perfectly to the surface
- Extremely fine sanding pattern
 Comfortable sanding due to foam back

Application advice

- We recommend an intermediate cleaning of the abrasive
- surface with a microfiber cloth.
- We recommend using PROFLEX Neptune Soft with the Carsystem PROFLEX Neptune Pad MaxGrip.

 We recommend using the Carsystem Sanding Water SW20
- for wet sanding.

ArtNo.	Specification	SP	MOQ
157.791	P 600	20	400
157.792	P 800	20	400
157.794	P 1000	20	400

For industrial and professional use only.

PROFLEX Neptune Pad MaxGrip

Hand Pad - 120 × 75 × 6 mm - Multihole



Description

- Sponge hand pad
- Micro Velcro®
 Degree of hardness: Soft medium

Area of application

■ Hand pad for all Neptune sanding sheets

NEW

Benefits

- Non-slip
- Ideal for dry and wet sanding with excellent
- water transport (Neptune Soft)


 Very comfortable feeling
- Adapts perfectly to the surface

ArtNo.	Specification	SP	MOQ
158.097	soft - medium	1	100

Abrasives

PROFLEX Neptune Pad

Hand pad – 78 × 123 × 5 / 7 mm



Description

- Foam back pad for Neptune sanding sheets
 Micro Velcro®
 Two degrees of hardness: Soft + hard

Area of application

- Soft = hard-to-reach areas, smallest corners
- Hard = sanding even surfaces

Benefits

2 degrees of hardness: soft and hard

ArtNo.	Specification	SP	MOQ
154.175	$78 \times 123 \times 5$ mm / soft	1	20
154.174	78 × 123 × 7 mm / hard	1	20

ProFLEX Saturn

Film abrasive - 152 mm - 15 holes

Description

- Special film-based sanding disc
- Aluminium oxide grain

Area of application

- Matting and sanding on extra
- hard clear coat surfaces

 Wet and dry sanding

Benefits

High aggressiveness Fast removal of surface structure

Application advice

■ We recommend to wet the surface slightly with Sanding Water SW20

ArtNo.	Specification	SP	MOQ
153.482	P 800	50	1000
153.483	P 1000	50	1000

PROFLEX Saturn

Film abrasive - 75 mm

Description

■ Special film-based sanding disc Aluminium oxide grain

Area of application

- Matting and sanding on extra
- hard clear coat surfaces Wet and dry sanding

Benefits

- High aggressiveness
- Fast removal of surface structure

Application advice

■ We recommend to wet the surface slightly with Sanding Water SW20

ArtNo.	Specification	SP	MOQ
153.485	P 800	50	1000

ProFlex Mercury

Film abrasive - 29 × 35 mm



Description

- Film-based sanding sheetsSelf adhesive
- Aluminium oxide grain

Area of application

- Removing of imperfections in the surface
- FinishFlattening of removed imperfections

Benefits

- Extremely fast removal of imperfections
- Dry use makes the sanding progress immediately visible
 Also suitable for slightly larger areas

Application advice

■ We recommend the use of the PRoFLEX Mercury block soft or hard We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.437	P 1500	200	4000
153.460	P 2000	200	4000
153.461	P 2500	200	4000
153.462	P 3000	200	4000

PROFLEX Mercury Sanding Block

Sanding block - 27 × 33 × 15 mm



Description

- Rubber block for the use with PROFLEX Mercury sheets
- Two degree's of hardness: Soft + hard

Area of application

- Soft: Flattening of imperfections (more flexible)
- Hard: Flattening of dust inclusions


Benefits

- Usable on both sides
- Two degree's of hardness for the whole finish process

ArtNo.	Specification	SP	MOQ
156.555	soft / red	2	100
154.173	hard / black	2	100

PROFLEX Pluto

Film abrasive - 34 mm

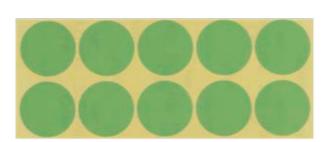

Description

- Film-based daisy disc
- Film-based daisy disc
 Self adhesive
 Aluminium oxide grain

Area of application

- Removing of imperfections in the surface
- Flattening of removed imperfections

- Extremely fast removal of imperfections
- Dry use makes the sanding progress immediately visible

Application advice

- We recommend the use of the ProFlex Back Pad PSA for machine
- sanding and the Pluto Sanding Blocks for manual use

 We recommend an intermediate cleaning of the abrasive surface
- with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.428	P 1500	100	6000
154.429	P 2000	100	6000
154.430	P 2500	100	6000
154.431	P 3000	100	6000
154.432	P 4000	100	6000
154.433	P 5000	100	6000

PROFLEX Pluto Sanding Block

Sanding block



Description

- Rubber block for the use with Pluto daisy discs
- Two degree's of hardness: Soft + hard

Area of application

- Soft: Flattening of imperfections (more flexible)
- Hard: Flattening of dust inclusions

Benefits

- Usable on both sidesTwo degree's of hardness for the whole finish process
- Rounded edges perfect for smooth roundings

ArtNo.	Specification	SP	MOQ
156.557	red / soft	2	100
156.556	black / hard	2	100

PROFLEX Back Pad PSA

Back pad - 30 mm



■ PSA cellular rubber back pad for PRoFLEX Pluto daisy discs

Area of application

- Usable with the CS Mini Sanding Macine
- Usable with the ProFLEX Pluto daisy discs

Benefits

Art.-No.

155.153

Perfect balance between cutting power and even sanding pattern in the final sanding process

Specification

stick / 1/4" inner thread

PROFLEX Interface Pad Interface pad - 150 mm - 15 holes

Interface pad - 150 mm

Description

■ Medium and soft = 10 mm

■ Hard = highest cutting power

Area of application



■ Interface pads with micro Velcro® for PRoFLEX Jupiter sanding discs

■ The micro Velcro® allows the use of soft film discs (PRoFLEX Jupiter)

Soft = finest sanding pattern for final finish sanding
 Medium = balance between cutting power and evenness

Three degree's of hardness: Soft, medium, hard
 Hard = 5 mm

Description

- Interface pads with micro Velcro® for PRoFLEX Jupiter sanding discs 2 degree's of hardness: soft + hard
- Thickness: 5 mm

Area of application

- The micro Velcro® allows the use of soft film discs (PRoFLEX Jupiter)
- Soft = finest sanding pattern for final finish sanding
 Hard = highest cutting power

Benefits

- Selection of three different degrees of hardness
 Micro Velcro® does not provoke scratches through the soft film abrasive

ArtNo.	Specification	SP	MOQ
154.295	10 mm / soft	1	20
154.193	10 mm / medium	1	20
155.100	5 mm / hard	1	20
199.100	5 mm / flard	1	20

PROFLEX Interface Pad

For industrial and professional use only.

Benefits

- Selection between two different degree's of hardness
- Micro Velcro® does not provoke scratches through the soft film abrasive

ArtNo.	Specification	SP	MOQ
155.101	soft	1	20
155.099	hard	1	20

MOQ

2

2

PROFLEX Interface Pad

Interface pad - 75 mm



Description

- Interface pads with micro Velcro® for PRoFLEX Jupiter sanding discs
- Three degree's of hardness: hard, medium, soft
- Hard = 5 mm
- Medium and soft = 10 mm

Area of application

- The micro Velcro® allows the use of soft film discs (PRoFLEX Jupiter)
 Soft = finest sanding pattern for final finish sanding
- Medium = balance between cutting power and evenness
- Hard = highest cutting power

- Selection between three different degree's of hardness
 Micro Velcro® does not provoke scratches through the soft film

ArtNo.	Specification	SP	MOQ
154.296	soft / 10 mm	1	20
154.194	medium / 10 mm	1	20
155.098	hard / 5 mm	1	20

PROFLEX Interface Pad

Interface pad - 30 mm



Description

- Interface pad with micro Velcro® for PRoFLEX Jupiter daisy discs
- Cellular rubber pad
 Thickness: 5 mm

Area of application

■ Usable with the PROFLEX Jupiter daisy discs

Benefits

- Hard cellular rubber provides more stability and cutting power
- Micro Velcro® does not provoke scratches through the soft film

ArtNo.	Specification	SP	MOQ
157.137	hard / 5 mm	5	500

PROFLEX Interface Pad

Interface pad 34 mm

Description

- Interface pads with micro Velcro®
- for ProFLEX Jupiter daisy discs
- Hard foam pad
- Thickness: 5 mm

Area of application

■ Usable with the PROFLEX Jupiter daisy discs

Benefits

- Hard foam provides a good balance between cutting power and even sanding pattern
- Micro Velcro® does not provoke scratches through the soft film

ArtNo.	Specification	SP	MOQ
155.097	hard / 5 mm	5	75

Mini Sanding Discs Grip

Mini sanding discs - Velcro®

Description

■ Paper-based daisy disc Wave form

Area of application

For removing paint imperfections, scratches and dust particles

■ Flattening of removed imperfections

Benefits

- No sharp edges due to wave form
- Extremely fine sanding pattern

ArtNo.	Specification	SP	MOQ
156.592	P 1500 / 1,000 pcs. / bag	1	5
156.593	P 3000 / 1,000 pcs. / bag	1	5
156.594	P 4000 / 1,000 pcs. / bag	1	5

Paint Planer

Paint planer and holder

Description

- Paint planer and holderThe front side of the holder is for storing the paint planer

 The back sides can hold Velcro®
- adhesive daisy discs

Area of application

Removal of paint imperfections



Fine Block

Fine sanding block

Description

Carbon fine sanding block

Area of application

Removal of bigger paint imperfections e.g. paint drops or large dust inclusions

Benefits

Self sharpening

Application advice

- We recommend using the fine sanding block only wet Soak thoroughly before first use for at least 15 min.
- The fine block should not get dry again after being soaked for the first time

ArtNo.	Specification	SP	MOQ
140.979	800	1	10
140.980	1500	1	10
140.981	2000	1	10
140.982	3000	1	10





RUPES Random Orbital Sander ER

Random orbit sander, electric



1	ArtNo.	Specification	SP	MOQ
	158.283	ER303TE / 3 mm Throw	1	1
	158.284	ER305TE / 5 mm Throw	1	1

Description

- Random orbit sander-electric

 3mm / 5mm throw

 Velcro® back pad: 150 mm
 Hole pattern: Multihole
 Adjustable speed up to 10.000 rpm
 Thread: M-8F

ArtNo.	Specification	SP	MOQ
158.283	ER303TE / 3 mm Throw	1	1
158.284	ER305TE / 5 mm Throw	1	1

RUPES Skorpio III RH

Random orbital sander, pneumatic



ArtNo.	Specification	SP	MOQ
157.334	RH353A / 3 mm orbital diameter	1	1
157.335	RH356A / 6 mm orbital diameter	1	1
157.336	RH359A / 9 mm orbital diameter	1	1

Description

- Pneumatic random orbital single-hand sander
 3 mm / 6 mm / 9 mm orbital diameter
 Ø Velcro® back pad: 150 mm

- Carsystem hole pattern 25-holes and oval center hole
 Adjustable speed up to 11,000 rpm.
 Thread: M8

RUPES Skorpio E RX

Random orbital sander, electric



ArtNo.	Specification	SP	MOQ
157.326	RX253A / 3 mm orbital diameter	1	1
157.328	RX256A / 6 mm orbital diameter	1	1

Description

- Electric random orbital single-hand sander

 3 mm / 6 mm orbital diameter

 Velcro® back pad: 150 mm

 Carsystem hole pattern 25-holes and oval center hole

 Adjustable speed up to 10,000 rpm.

 Inner thread: 5/16"

 Power: 250 watt

RUPES Random Orbital Sander TA6A

Random orbital sander Triple Action, pneumatic



ArtNo.	Specification	SP	MOQ
157.339	TA6A / 6 mm orbital diameter	1	1

Description

- Pneumatic random orbital sander
 6 mm orbital diameter
 Ø Velcro® back pad: 150 mm

- Carsystem hole pattern 25-holes and oval center hole
 Adjustable speed up to 8,000 rpm.
 Thread: M8

RUPES Back Pad

Back pad, 150 mm



ArtNo.	Specification	SP	MOQ
157.271	M8 / hard	1	10
157.272	5/16" / hard	1	10

- Back pad with Carsystem hole pattern 25-holes and oval center hole
 Strength: Hard
 Thread: M8 and 5/16"
 For TA-ER-BR-RH-machines

Specification	SP	MOQ
M8 / hard	1	10

RUPES Orbital Sander SL42AES

Orbital sander, electric



ArtNo.	Specification	SP	MOQ
157.329	SL42AES / 4,8 mm orbital diameter	1	1
157.559	rubber plate	1	1

- Abrasives

Description

- Electric orbital sander
- 4,8 mm orbital diameterSize: 70 × 400 mm
- Adjustable speed up to 7,000 rpm.
 Power: 550 watt

RUPES Orbital Sander SLP41A

Orbital sander, pneumatic



ArtNo.	Specification	SP	MOQ
157.337	SLP41A / 5 mm orbital diameter	1	1
157.559	rubber plate	1	1

Description

- Pneumatic orbital sander4,8 mm orbital diameter
- Size: 70 × 400 mm
 Adjustable speed up to 10,000 rpm.

RUPES Orbital Sander RE21ALN

Orbital sander, pneumatic



ArtNo.	Specification	SP	MOQ
157.454	RE21ALN / 3 mm orbital diameter	1	1
157.558	sanding plate	1	1

Description

- Pneumatic orbital single-hand sander
 3 mm orbital diameter
 Size: 70 × 198 mm

- Adjustable speed up to 11,000 rpm.

RUPES Random Orbital Single-Hand Sander RA75

Random orbital sander, pneumatic



ArtNo.	Specification	SP	MOQ
157.333	RA75 / 3 mm orbital diameter	1	1

Description

- Pneumatic random orbital single-hand sander 3 mm orbital diameter Ø Velcro® back pad: 75 mm

- Adjustable speed up to 11,000 rpm.
 Thread: 5/16"

ArtNo.	Specification	SP	MOQ
157.333	RA75 / 3 mm orbital diameter	1	1

RUPES Mini Random Orbital Sander LD30

Mini random orbital sander, pneumatic



ArtNo.	Specification	SP	MOQ
157.330	LD30 / 1.5 mm orbital diameter	1	1

Description

- Pneumatic mini random orbital sander
 1,5 mm orbital diameter
 Velcro® back pad: 30 mm

- Adjustable speed up to 7,500 rpm.

RUPES Random Orbital Sander TA50

Random orbital sander, pneumatic



Daga	-:-	4:	
Desc	rip	u	ΟI

Pneumatic mini random orbital sander
 3 mm orbital diameter
 Ø Velcro® back pad: 50 mm
 Adjustable speed up to 15,000 rpm.
 Thread: M6

For industrial and professional use only.

ArtNo.	Specification	SP	MOQ
157.338	TA50 / 3 mm orbital diameter	1	1

RUPES Ibrid Nano

Battery operated mini sanding and polishing machine



Description

- Battery operated mini sanding machine
 Provided with: 12 mm orbital diameter unit and 50 mm Velcro® back pad
 Adjustable speed up to 5,000 rpm.
 Running time: Approx. 30 min

- Charging time: Approx. 20 minThread: M14-M

ArtNo.	Specification	SP	MOQ
157.318	HR81M / STB Ibrid Nano short neck	1	1
157.319	HR81ML / STB Ibrid Nano long neck	1	1
158.370	Polish Pad 9.DA 40S / extrafine / white	6	6
157.718	Polish Pad 9.BF 40M	6	6
157.717	Polish Pad 9.BF 40H	6	6
157.784	Back pad / Velcro® daisy discs / 30 mm	1	1
157.785	Polishing back pad / Velcro® daisy discs / 50 mm	1	1
157.786	Back pad / Self adhesive daisy discs / 30 mm	1	1
157.787	Rotation unit	1	1
157.788	Orbital diameter unit / 3 mm	1	1

RUPES Ibrid Nano Q-MAQ

Battery operated mini sanding and polishing machine



ArtNo.	Specification	SP	MOQ
157.320	MAQ HQM83 / STB / Ibrid Nano Q-MAG	1	1
157.644	back pad / 75 mm	1	1

Description

- Battery operated random orbital sander
- 2 mm orbital diameter
 Ø Velcro® back pad: 75 mm
- Adjustable speed up to 5,000 rpm.
 Running time: Approx. 30min
 Charging time: Approx. 20min

ArtNo.	Specification	SP	MOQ
157.320	MAQ HQM83 / STB / Ibrid Nano Q-MAG	1	1
157.644	back pad / 75 mm	1	1

RUPES Compact Vacuum

Cleaner SV10E

Compact vacuum cleaner

Description

- Compact vacuum cleaner for extracting dust and sanding
- dust in the workshop

 Can be combined with the RUPES
- Carrier for polishes and abrasives

 Socket for electrical automatic
- switch-on (max. 1,000 W)

 Selector button for setting
- the suction power Tank volume of the dust bag: 3.5 kg
 Noice level: 75 dB (A)



RUPES Vacuum Cleaner \$145

Vacuum cleaner

Description

- Movable vacuum cleaner with 5 m hose
 Tank volume: 45 L
 Air flow: 3,400 L/min.

- Noise level: 67 dB (A)
- Power: 1,200 wMax. Power: 2,400 W



ArtNo.	Specification	SP	MOQ
157.343	S145L Profi Vacuum Cleaner	1	1
157.344	S145PL Profi Vacuum Cleaner	1	1
157.471	S145EM Vacuum cleaner	1	1
157.472	S145EPM Vacuum cleaner	1	1
157.560	Dust bag S Serie	1	1

RUPES Workshop Carrier KC28

Workshop carrier

- Description Workshop carrier for vacuum cleaners
- 2 Tool holder2 Holders for suction hoses
- 2 Rotating front castors with brakes
- Storage compartment, lockable with key
- Working surface with large multipurpose box
 Ergonomic handle



ArtNo.	Specification	SP	MOQ
157.341	KC28	1	1
157.469	Peg board for KC28	1	1

RUPES Carrier

Carrier for polishes and abrasives

Description

- Workshop carrier for polishes and abrasives3 Systainer with drawers
- Storage compartment with additional suspension for polishing machines
- Power connection for electric tools
 Impact and shock resistant plastic



ArtNo.	Specification	SP	MOQ
157.342	Carrier	1	1

Excenter Classic

Random orbital sander, pneumatic

Description

- Pneumatic random orbital sander without back pad
- 5 mm orbital diamenter
- Thread: 5/16" 24 inner thread



Finish Sander RC 9332

Random orbital sander 75 mm, pneumatic

Description

- Pneumatic random orbital single-hand sander
- 2,5 mm orbital diameter
- Adjustable speed up to 10,000 rpm
- Inner thread: 1/4"



ArtNo.	Specification	SP	MOQ
143.388	incl. back pad / 2.5 mm orbital diameter / 75 mm Ø	1	1

Mini Sanding Machine RC 9330

Mini sanding machine, pneumatic

Description

- Pneumatic random orbital sander for daisy discs incl. 2 back pads (for Velcro® and PSA discs)

 Adjustable speed up to 7,500 rpm.

Area of application

■ Thread: 5/16"

Finish sanding with daisy discs

■ For Velcro® and PSA discs

ArtNo.	Specification	SP	MOQ
143.724	Mini sanding machine incl. back pad stick and grip	1	1

Mini Back Pad

Finish back pad

Description

- Replacement back pad for mini sanding machine RC 9330

 For self-adhesive discs /
- Velcro® discs
 Inner tread 1/4"



ArtNo.	Specification	SP	MOQ
144.768	28 mm Stick / medium	1	5
144.769	28 mm Grip / medium	1	5

Excenter Back Pad T.19

Back pad - 150 mm

Description

- Back pad with Carsystem
- hole pattern
- 25 holes and oval center hole Three degree's of hardness: Soft, medium, hard

Area of application

- Soft = lowest cutting power highest flexibility
 Medium = Balance between cutting power and flexibility
- Hard = Highest cutting power lowest flexibility

Benefits

■ Selection between three different degree's of hardness

ArtNo.	Specification	SP	MOQ
156.564	Grip / M8 and 5/16" / soft	1	100
156.227	Grip / M8 and 5/16" / medium	1	100
156.563	Grip / M8 and 5/16" / hard	1	100
100.000		•	100

Excenter Back Pad Multi M

Back pad - 150 mm

Description

- Multi-hole excenter back pad Degree of hardness: Medium
- Suitable for all commercially
- available excenter machines
- Incl. M8 and 5/16" screws and Festool special adapter

Area of application

■ Universal back pad for dry sanding work

ArtNo.	Specification	SP	MOQ
156.570	Grip / multi-hole	1	100

Finish Sander Back Pad

Back pad - 77 mm

Description

- Replacement back pad for Finish Sander RC 9332
- Thread: 5/16" (fixed screw)

Art.-No.

144.917

For industrial and professional use only.



Specification

5/16" UNF connections

Interface Pad Interface Pad - 150 mm

Description

- Interface pad with Carsystem hole pattern
- 25 holes and oval center hole
 The hole pattern is based on the 15 hole pattern and
- 10 additional holes ■ Thickness: 5 mm + 10 mm

Area of application

- Sanding on all areas with curves, roundings and edges
- Usable with the Carsystem P.19 and F.19 sanding discs

Benefits

MOQ


- Perfect adaption to the surface
- Minimizes the risk of sanding through
 Oval center hole helps fitting a new disc perfectly to the plate

ArtNo.	Specification	SP	MOQ
156.225	10 mm	2	50
156.226	5 mm	2	50



Pad Saver

Interface Pad - 150 mm

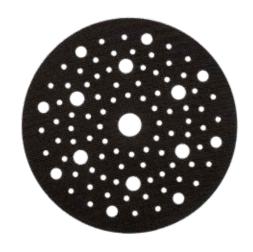

Description

- Interface pad with multi holes for all common hole systems

Area of application

■ The Pad Saver is used as a second Velcro® layer

■ Saves the original Velcro® layer of the excenter back pad

ArtNo.	Specification	SP	MOQ
154.099	Pad Saver / 5 pcs. / bag	1	100

Sanding Block Disc Kit 150

Hand sanding block set - Velcro®



Description

- Set of hand sanding blocks with adjustable dust extraction
 Four exchangeable base plates for even, concave and convex surfaces
 Multi hole for all common sanding discs

Area of application

■ Usable with 150 mm sanding discs with Velcro®

- Four exchangeable base plates for even, concave and convex surfaces
- Dust extraction valve adjustable

ArtNo.	Specification	SP	MOQ
151.904	15 holes	1	1

Soft Interface Pad

Interface pad - 150 mm

Description

Universal interface padMulti hole system for all common hole systems

Area of application

Sanding on all areas with curves, roundings and edges

- Perfect adaption to the surfaceMinimizes the risk of sanding through

ArtNo.	Specification	SP	MOQ
140.585	grip no holes	2	10
140.584	grip universal	2	10

Soft Interface Pad

Soft interface pad - 73 mm

Description

Soft interface pad ■ Thickness: 10 mm

Area of application

■ For all fine sanding

- Perfect adaption to the surface
- Provides a fine and even sanding pattern

ArtNo.	Specification	SP	MOQ
144.923	Soft Interface Pad / Grip	1	10

Sanding Block 198 Kit

Hand sanding block set - Velcro®



Description

- Set of hand sanding blocks with adjustable dust extraction
- Four exchangeable base plates for even, concave and convex surfaces
 Multi hole for all common sanding strips

Area of application

Usable with Carsystem P.19 sanding strips 70 × 198 mm and Carsystem N20 net sanding strips

Benefits

- Four exchangeable base plates for even, concave and convex surfaces

ArtNo.	Specification	SP	MOQ
148.702	22 holes	1	1

Sanding Block 198 Grip

Hand sanding block - Velcro®

Description

Hand sanding block with dust extraction

Area of application

■ Usable with Carsystem P.19 sanding strips 70 × 198 mm and Carsystem N20 net sanding strips

ArtNo.	Specification	SP	MOQ
141.962	2 × 4 holes	1	5

Sanding Block 400 Grip

Hand sanding block - Velcro®

Description

■ Hand sanding block with dust extraction

Area of application

Usable with Carsystem P.19 sanding strips 70 × 400 mm and Carsystem N20 net sanding strips

ArtNo.	Specification	SP	MOQ
141.964	2 × 7 holes	1	5

Sanding Block 400 Grip Flex

Hand sanding block - Velcro®

Description

- Flexible hand sanding file
- with dust extraction ■ Free variable for concave and convex surfaces

Area of application

 \blacksquare Usable with Carsystem P.19 sanding strips 70 \times 400 mm and Carsystem N20 net sanding strips

Adjustable for concave or convex surfaces

ArtNo.	Specification	SP	MOQ
150.088	14 holes	1	5

Sanding Block Grip

Hand sanding block - Velcro®

Description

Hand sanding block made of polyurethane

Area of application

■ Usable with 150 mm Velcro® discs



Sanding Block Box Grip

Hand sanding blocks - Velcro®



Description

- Hand sanding blocks
- polyurethane

 Four different blocks
 concave and convex

Area of application

■ Usable with 150 mm sanding discs with Velcro®

Benefits

Sanding blocks for concave and convex surfaces

ArtNo.	Specification	SP	моо
142.009	Velcro® 150 mm	1	16

Sanding Block Hard

Hand sanding block - hard

Description

■ Hard rubber sanding block

Area of application

■ Levelling surfaces

-	Wet	and	dry	sanding

ArtNo.	Specification	SP	MOQ
137.431	125 mm × 70 mm	1	12

Sanding Block Soft

Hand sanding block - soft

Description

Soft rubber sanding block

Area of application

Levelling surfacesWet and dry sanding

ArtNo.	Specification	SP	MOQ
137.432	125 mm × 70 mm	1	12



Dry Coat-black

Control powder - black



Description

Extremly fine powder which reaches deep into all imperfections of the surface to make scratches and structures visible

Area of application

- Sanding control powder for putty or fillered surfaces
 Black for light substrates

- Makes finest scratches, imperfections and pinholes visible

- Does not clogg the sanding paper
 Powder cartridge is protected in the handle

ArtNo.	Specification	SP	MOQ
128.366	set of control powder pad + 2 × 30 g refill / black	1	6
132.136	refill, 30g / black	1	12

Dry Coat-orange

Control powder - orange



Description

Extremly fine powder which reaches deep into all imperfections of the surface to make scratches and structures visible

Area of application

- Sanding control powder for putty or fillered surfaces
- Orange for dark substrates

Benefits

- Makes finest scratches, imperfections and pinholes visible

- Solvent-free
 Does not clogg the sanding paper
 Powder cartridge is protected in the handle

ArtNo.	Specification	SP	MOQ
133.849	set of control powder pad + 2 × 15 g refill / orange	1	6
133.848	15 g refill / orange	1	12

Control-Spray

Sanding control spray

Description

Black sanding control spray puts a layer of control paint onto the surface to make sanding imperfections visible

Area of application

Art.-No.

125.779

■ Sanding control of putty or fillered surfaces

■ Makes finest imperfections in the surface visible

Specification

black / 400 ml

Fast drying, grease and silicone-free



12

Tape Off Disc Premium

Sticker removal disc

Description

- Sticker removal disc ■ Caramel smell

Area of application

Residue-free removal of stickers, decorative stripes, decals etc.

Benefits

■ No discoloration of the paint

Application advice

■ Max. 4,000 r/pm

ArtNo.	Specification	SP	моо
152.013	90 mm / set of 2 discs + 1 adapter	1	50

Tape Off Tool

Axial sander

Description



■ Retarded runout Area of application

■ Usable with Carsystem Tape Off Disc Premium

■ Reduced speed to avoid damaging the paint

Art.-No. Specification SP MOQ 133.172 1 axial sander 1 1

Stripping Disc

Raw cleaning disc

Description

Cleaning disc for removing semi-soft materials and paint by machine

Area of application

 Removing of semi-soft materials like underbody coating, stone chip protection, sealing compounds and rust by machine

Benefits

■ The substrate remains undamaged

Application advice

- 100 mm = max. 6,000 rpm.150 mm = max. 4,000 rpm.

ArtNo.	Specification	SP	MOQ
127.999	100 mm	10	10
128.000	150 mm	10	10









MULTI GREEN RAPID

is a polyester multifunctional putty with a drying time of 10 min / 20°C object temperature.

The Multi Green Rapid has no surface moisture after curing. Because of the latest filling agents it has an improved sandability.



MULTI GREEN CHANGER

Just like our Multi Green, the new Multi Green Changer stands out with stab-proof texture, high stability and optimised grindability. This putty is ideal for filling small to large dents, scratches and sanding marks.

Whilst curing, the Multi Green Changer switches colour from green to yellow and thus it achieves a high process reliability.



MULTI BLUE CHANGER

Just like our Multi, the new Multi Blue Changer comes with a very creamy texture and excellent application properties. This putty is ideal for filling small to large dents, scratches and sanding marks.

Whilst curing, the Multi Blue Changer switches colour from blue to grey and thus it achieves a high process reliability.

MULTI GREEN GLAS LIGHT

is a polyester-multifunctional glass fibre reinforced putty with short glass fibres.

The Multi Green Glas Light has a very precise application and an optimized sandability.







STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Multi

Multi-funcional polyester putty

Description

- Multifunctional polyester putty
- Universal putty
 Colour: Beige

Area of application

■ For filling small to deep imperfections, dents & scratches

Very easy to apply due to its creamy consistencyMulti adhesion

ArtNo.	Specification	SP	MOQ
130.857	1 kg tin incl. hardener	1	6
127.977	2 kg tin incl. hardener	1	6
134.155	1.5 kg cartridge incl. hardener	1	8
132.214	2.9 kg cartridge incl. hardener	1	6
128.145	9.7 kg cartridge incl. hardener	2	2

Multi Light

Multi-funcional polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester putty
- Ultra lightweight puttyColour: Light beige

Area of application

■ For filling small to medium-sized imperfections, dents and scratches

Benefits

■ Multi adhesion

ArtNo.	Specification	SP	MOQ
141.503	1.3 kg tin incl. hardener	1	6
142.155	2.2 kg cartridge incl. hardener	1	6
142.156	7.2 kg cartridge incl. hardener	2	2

Multi Silver Light

Multi-funcional polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester puttyLightweight puttyColour: Silver

Area of application

■ For filling small to medium-sized imperfections, dents & scratches

Benefits

- Creates a visually good-looking transition zone due to its silver colour

ArtNo.	Specification	SP	MOQ
140.795	1.5 kg tin incl. hardener	1	6

Multi Plus

Multi-funcional polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	МООБ
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester putty
- Universal puttyColour: White

Area of application

■ For filling small to deep imperfections, dents & scratches

- Good balance between being semi-solid & creamy
- Very easy to applyMulti adhesion

ArtNo.	Specification	SP	MOQ
138.451	1.6 kg tin incl. hardener	1	6
138.454	8.5 kg cartridge incl. hardener	2	2

Multi Soft

Multi-funcional polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester putty
- Fill and fine putty
 Colour: Light grey

Area of application

■ For filling small to deep imperfections, dents and scratches

Benefits

- Very easy to apply due to its creamy consistency

ArtNo.	Specification	SP	MOQ
137.206	2 kg tin incl. hardener	1	6

Multi Blue Changer

Multi-funcional polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester putty
- Universal puttyColour: Blue

Area of application

■ For filling small to deep imperfections, dents and scratches

- Colour change during the curing time from blue to grey
- Very easy to apply due to its creamy consistency
 Multi adhesion

ArtNo.	Specification	SP	MOQ
157.623	2 kg tin (incl. hardener)	1	6

Multi Green Changer

Multi-funcional polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester putty
- Universal putty
 Colour: Green

Area of application

■ For filling small to deep imperfections, dents & scratches

Benefits

- Colour change during the curing time from green to yellow
 Reduced surface moisture after curing
 Good balance between being semi-solid and creamy
 Multi adhesion

ArtNo.	Specification	SP	MOQ
157.622	1.6 kg tin (incl. hardener)	1	6

Multi Green SF

Multi-funcional polyester putty styrene-free



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester putty
- Styrene-freeColour: Green
- Styrene-free putty differs in the typical putty smell

Area of application

For filling small to deep imperfections, dents and scratches

- Styrene-freeVery easy to apply due to its creamy consistencyMulti adhesion

ArtNo.	Specification	SP	MOQ
156.543	1.75 kg tin incl. hardener	1	6

Multi Green Plus 1.0 Super Light

Multi-funcional polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester putty
 Ultra lightweight putty
 Colour: Green

Area of application

■ For filling small to deep imperfections, dents and scratches

Benefits

- Completely dry surface after curing
 Improved sandability due to the latest filling agents
 Curing time: 12 min / 20°C objecttemperature
 Multi adhesion

Application advice

First sanding step with P 150 possible

ArtNo.	Specification	SP	MOQ
152.357	1 kg tin incl. hardener	1	6
152.978	2.978 1.6 kg cartridge incl. hardener		6

Multi Green Glas

Multifunctional fiberglass reinforced polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	МООБ
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester putty
 Glass fibre reinforced putty
- Colour: Green

Area of application

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
 Perfectly suitable for GRP repair

Benefits

- Short glass fibresMulti adhesion
- Very precise application

ArtNo.	Specification		MOQ
146.707	1.65 kg tin incl. hardener	1	6

Multi Green

Multi-funcional polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Multifunctional polyester putty
- Universal putty Colour: Green

Area of application

■ For filling small to deep imperfections, dents and scratches

- Reduced surface moisture after curing
 Good balance between being semi-solid and creamy
 Multi adhesion

ArtNo.	Specification	SP	MOQ
146.706	1.6 kg tin incl. hardener	1	6
147.337	2.52 kg cartridge incl. hardener	1	6
149.134	8.11 kg cartridge incl. hardener	1	2

For industrial and professional use only.

Multi Green Glas Light

Multifunctional fiberglass reinforced lightweight polyester putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

NEW

Description

- Multifunctional polyester putty
- Glass fibre reinforced ultra lightweight putty
 Colour: Green

Area of application

For filling very deep imperfections, for repairing treated rust spots and GRP

Benefits

- Short glass fibresMulti adhesion
- Very precise application
- Optimized sandability

1	ArtNo.	Specification	SP	MOQ
	158.116	1.3 kg tin incl. hardener	1	6



✓ ✓ ✓ ✓ × ✓ ✓

Multi Green Rapid

Multi-funcional polyester putty

Description

- Multifuncional polyester putty
- Universal puttyColour: Green

Area of application

■ For filling small to deep imperfections, dents & scratches

Benefits

- No surface moisture after curing
 Improved sandability due to the latest filling agents
 Curing time: 10 min / 20°C object temperature
 Multi adhesion

ArtNo.	Specification	SP	мос
158.233	1.3 kg tin incl. hardener	1	6

NEW

Elastic Green

Polyester-fine putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester putty
- Fine puttyColour: Green

Area of application

■ For filling small to medium-sized imperfections, dents and scratches

- Provides an even surface free of pores
- Minimizes the sanding time

ArtNo.	Specification	SP	MOQ
146.708	2 kg tin incl. hardener	1	6

Soft

Polyester-fill putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester puttyFill puttyColour: Beige

Area of application

For filling medium-sized to deep imperfections, dents and scratches

Benefits

Easy to apply due to its creamy consistency

Specification	SP	MOQ
0.9 kg tin incl. hardener	1	6
1.8 kg tin incl. hardener	1	6
2.6 kg cartridge incl. hardener	1	6
	0.9 kg tin incl. hardener 1.8 kg tin incl. hardener	0.9 kg tin incl. hardener 1 1.8 kg tin incl. hardener 1

Fill

Polyester-fill putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

For industrial and professional use only.

Description

- Polyester putty
- Fill putty
 Colour: Grey

Area of application

■ For filling deep to very deep imperfections, dents & scratches

Benefits

Very high filling performance

ArtNo.	Specification	SP	MOQ
127.971	2 kg tin incl. hardener	1	6

Metallic

Polyester-fill putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester putty
 Fill putty
 High density due to aluminum content
 Colour: Silver

Area of application

■ For filling medium-sized to deep imperfections, dents and scratches

■ Creates a visually good-looking transition zone due to its silver colour

Art.	-No.	Specification	SP	MOQ
130	.852	1 kg tin incl. hardener	1	6
127	.911	2 kg tin incl. hardener	1	6

Steel

Polyester-hard putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Special polyester putty
 Hard putty
 Extremely high hardness
 Colour: Alu grey

Area of application

- For filling very deep imperfections
 Re-building of deformed edges

Benefits

- Replaces the tin application for welded steel panels
 Highly break resistant
 Fast drying

ArtNo.	Specification	SP	MOQ
138.587	0.9 kg tin incl. hardener	1	6

Alu Spezial

Polyester-hard putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	×	\checkmark	\checkmark

Description

- Special polyester putty
- Hard putty
 Extremely high hardness range
 Colour: Light grey

Area of application

- For filling very deep imperfections
 Re-building of edges and bonded aluminum parts

Benefits

- Replaces the tin application for aluminium
- Similar characteristic like aluminum
 No sagging of transition zones on bonded replacement parts

ArtNo.	Specification	SP	MOQ
148.524	1.8 kg tin incl. hardener	1	6

Anti Rust Putty

Anti rust putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	X	X	\checkmark	×	\checkmark	\checkmark

Description

- Special polyester putty
- Anti rust puttyColour: Red brown

Area of application

- For filling small imperfections, dents and scratches
 To provide additional rust protection

Additional anti rust layer

ArtNo.	Specification	SP	MOQ
149.612	1.8 kg tin incl. hardener	1	6

Elastic weiss

Polyester-fine putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester puttyFine puttyColour: White

Area of application

■ For filling small to medium-sized imperfections, dents and scratches

Benefits

- Provides an extra fine surface free of pores
- Minimizes the sanding effort

ArtNo.	Specification	SP	моо
130.856	1 kg tin incl. hardener	1	6
127.975	2 kg tin incl. hardener	1	6
132.115	3 kg cartridge incl. hardener	1	6
132.723	10 kg cartridge incl. hardener	2	2

Elastic beige

Polyester-fine putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester putty
- Fine puttyColour: Beige

Area of application

■ For filling small to medium-sized imperfections, dents and scratches

- Provides an extra fine surface free of pores
- Minimizes the sanding effort

ArtNo.	Specification	SP	MOQ
130.855	1 kg tin incl. hardener	1	6
127.976	2 kg tin incl. hardener	1	6

Liquid Putty

Polyester-liquid putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

- Description Polyester puttyLiquid puttyColour: Beige

Area of application

• For filling small imperfections, dents and scratches

Benefits

- Provides a perfect result almost free of pores

ArtNo.	Specification	SP	MOQ
143.496	1.04 kg bottle incl. hardener	1	8

Faser

Polyester-glass fibre reinforced putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	X	X	\checkmark	×	\checkmark	\checkmark

Description

- Polyester putty
- Special glass fibre putty
 Less fibres and more resin compared to normal glass fibre putties
 Colour: Brown transparent

Area of application

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
 Perfectly suitable for GRP repair

Benefits

Extra long glass fibres

ArtNo.	Specification	SP	MOQ
138.443	1.4 kg tin incl. hardener	1	6

Glas

Glas white

Polyester-glass fibre reinforced putty

GLAS WEISS

WOSSCHEMIE

Polyester-glass fiber reinforced putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester puttyGlas fibre reinforced puttyColour: Green

Area of application

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
 Perfectly suitable for GRP repair

Benefits

Extra long glass fibres

ArtNo.	Specification	SP	MOQ
130.854	1 kg tin incl. hardener	1	6
127.974	1.8 kg incl. hardener	1	6

Description

- Polyester putty
- Glass fibre puttyColour: White

Area of application

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
 Perfectly suitable for GRP repair

Benefits

Extra long glass fibres

Application advice

■ White hardener prevents any colour change of the putty surface

ArtNo.	Specification	SP	MOQ
144.808	1.8 kg tin (incl. hardener)	1	6

Multi Super Flex

Polyester putty highly elastic



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark

Description

- Multifunctional polyester putty
 High elastic putty
 Colour: Dark grey

Area of application

■ For filling small imperfections, dents and scratches on very flexible plastic parts

Benefits

- No loss of adhesion in the transition zone
- No adhesion primer necessaryMulti adhesion
- Sanding control due to dark colour

ArtNo.	Specification	SP	MOQ
153.284	1.8 kg tin incl. hardener	1	10

Plastic Pro

Plastic putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	\checkmark	\checkmark	\checkmark

Description

- Polyester putty
- Plastic contour puttyColour: Black

Area of application

■ For filling small imperfections, dents and scratches on plastic surfaces

- Outstanding adhesion on plastic surfaces
 No loss of adhesion in the transition zone
 No adhesion primer necessary

- Sanding control due to black colour

ArtNo.	Specification	SP	MOQ
149.613	1 kg tin (incl. hardener)	1	6

Flex

Polyester-plastic putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	МООБ
\checkmark	×	×	\checkmark	\checkmark	\checkmark	\checkmark

Description

- Polyester puttyPlastic contour puttyColour: Dark grey

Area of application

■ For filling small scratches and imperfections on plastic surfaces

Benefits

- Outstanding adhesion an plastic surfaces
 No loss of adhesion in the transition zone
- No plastic primer necessary

ArtNo.	Specification	SP	MOQ
134.796	1 kg incl. hardener	1	12

Hi Temp

Polyester-High temperature putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester putty
- High temperature puttyColour: Grey

Area of application

■ For filling small to medium-sized imperfections, dents and scratches

Benefits

- Cured putty can be stoved up to 140°C
 Provides an even surface free of pores
 Minimizes the sanding effort

ArtNo.	Specification	SP	MOQ
157.033	1.7 kg tin incl. hardener	1	6

Carbo Putty

Polyester-carbon putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Special polyester puttyFill and fine puttyColour: Transparent

Area of application

- Base layer on horizontal CRP and wood surfaces
- to fill pores and imperfections

 Transparent base on carbon parts
- Can be applied directly to CRP

Benefits

- Provides a surface free of pores
- Self-levelling
 Minimizes the sanding time
- No sagging on carbon partsImproves the top coat quality

ArtNo.	Specification	SP	MOQ
148.018	0.5 kg tin incl. hardener	1	12

Carbo Spray

Polyester-sprayable putty for carbon parts



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Special polyester putty
- Sprayable puttyColour: Transparent

Area of application

- For filling small to deep imperfections, dents and scratches
 Transparent base on carbon parts
 Can be applied directly to CRP

Benefits

- Very high layer thickness possible
- Very even application by spray gun
 No sagging on carbon parts
 Improves the top coat quality

ArtNo.	Specification	SP	MOQ
148.019	0.820 kg tin incl. hardener	1	6

Carbo Spray Thinner

Carbo spray thinner



Description

■ Thinner

Area of application

Thinner for Carbo Spray

ArtNo.	Specification	SP	MOQ
148.234	1.0 l tin	1	6

Spray

Polyester-sprayable putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester putty
- Sprayable puttyColour: Grey

Area of application

- For filling deep imperfections, dents and scratches
- Usable on passenger cars, trucks or in exhibition stand construction

Benefits

- Very high layer thickness possibleVery even application by spray gun

Application advice

• We recommend to apply an isolating layer in advance (e.g. acrylic filler 35µ). This isolating layer must not be sanded through. This isolating layer avoids blistering in bad environmental conditions.

ArtNo.	Specification	SP	MOQ
127.978	grey / 1.5 kg tin (incl. hardener)	1	6

Spray Plus

Polyester-sprayable putty



	21 2	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
V		×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester putty
- Sprayable fillerColour: Light grey

Area of application

- For filling deep imperfections, dents and scratches
 Passenger cars or trucks and exhibition stand construction
 Additionally usable on CRP panels

Benefits

- Very high layer thickness possibleVery even application by spray gun
- Optmized drying time and surface structure

Application advice

We recommend to apply an isolating layer in advance (e.g. acrylic filler 35µ). This isolating layer must not be sanded through. This isolating layer avoids blistering in bad environmental conditions.

ArtNo.	Specification	SP	MOQ
135.597	1.5 kg tin (incl. hardener)	1	6

Spray Thinner

Thinner

Description

Thinner for CS Spray Filler and CS Spray Plus

Area of application

Art.-No. 124.315

Thinner for polyester spray putty



Specification	SP	MOQ
transparent / 1,0 L tin	1	6

BPO Hardener

Hardener



Description

■ BPO hardener paste

Area of application

■ Hardener for polyester putty

ArtNo.	Specification	SP	MOQ
132.413	Hardener standard / red / 40 g	10	10
127.038	summer / blue / 40 g	10	10

- Polyester puttyBrushable puttyColour: Beige

Area of application

■ For filling very deep imperfections, dents and scratches

Benefits

- High layer thickness possible
- Easy to apply even in hard to reach areas

ArtNo.	Specification	SP	MOQ
127.912	1.5 kg tin (incl. hardener)	1	6

1K NC Filler

Nitrocellulose-filler





NEW

Description

- Nitrocellulose filler
- 1K Filler for application with a spatula
 Colour: Light grey

Area of application

■ For filling small imperfections, pinholes and stone chip damages

Benefits

- Fast dryingMulti adhesion

ArtNo.	Specification	SP	MOQ
158.139	200 g / tube	1	24

Polyester Repair Set

Polyester repair set



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	X	X	\checkmark	×	\checkmark	\checkmark

Description

- Polyester repair set
 Polyester resin, hardener and glass fibre mat
 Dimension of the glas fabric:
 126.047 = 250 g Set: 12,5 × 50 cm

- = 126.054 = 800 g Set: 125 × 40 cm

Area of application

- For repairing small holes in the surfaceFor repairing GRP parts

ArtNo.	Specification	SP	MOQ
126.047	250 g / set	1	12
126.054	800 g / set	1	12

Polyester Repair Resin

Polyester repair resin



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	X	X	\checkmark	×	\checkmark	\checkmark

Description

Polyester repair resin

Area of application

- For processing of glass fibre fabric and mats, for repairing small holes in the surface
 For repairing GRP parts

ArtNo.	Specification	SP	MOQ
126.050	1.000 g (incl. hardener)	1	6

Fill putty

Polyester-fill putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	МООБ
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester puttyFill puttyColour: Grey

Area of application

■ For filling deep to very deep imperfections, dents and scratches

Benefits

Very high filling performance

ArtNo.	Specification	SP	MOQ
124.550	250 g tin (incl. hardener)	1	12
124.551	500 g tin (incl. hardener)	1	12
124.552	1,000 g (incl. hardener)	1	12

Fine putty Polyester-fine putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester putty
- Fine puttyColour: White

Area of application

■ For filling small to medium-sized imperfections, dents and scratches

- Provides a very fine surface free of pores
- Minimizes the sanding time

ArtNo.	Specification	SP	MOQ
124.124	250 g tin (incl. hardener)	1	12
124.125	500 g tin (incl. hardener)	1	12
124.126	1,000 g tin (incl. hardener)	1	12

Glass fibre reinforced putty

Polyester-glass fibre reinforced putty



STEEL	ALUMINIUM	GALVANIZED STEEL	GRP	PLASTICS	2 COMP. POLYESTER PUTTY	WOOD
\checkmark	×	×	\checkmark	×	\checkmark	\checkmark

Description

- Polyester putty
 Glass fibre reinforced putty
 Colour: Green

Area of application

- For filling very deep imperfections
 For repairing treated rust spots and GRP parts
 Perfectly suitable for GRP repair

Benefits

Extra long glass fibres

ArtNo.	Specification	SP	MOQ
124.036	250 g tin (incl. hardener)	1	12
124.037	500 g tin (incl. hardener)	1	12
124.038	1,000 g tin (incl. hardener)	1	12

Glass fibre fabric

300 g per m²

Description

- Glass fibre fabric
 Weight 300 g/m²

Area of application

For covering small holes in the surface on non-bearing parts

Simple handling of round parts

Application advice

Usable with polyester repair resin



Glass fibre mat

300 g per m²

Description

Glass fibre mat
 Weight: 300 g/m²

Area of application

For covering small holes in the surface on non-bearing parts

Stabilizes parts against tensile strength

Application advice

Usable with polyester repair resin

1	ArtNo.	Specification	SP	MOQ
	125.423	0.5 m ²	1	12
	125.424	1.0 m²	1	12

Glass fibre fleece

40 g per m²

Description

Glass fibre fleece
 Weight: 40 g/m²

Area of application

For reinforcing and levelling GRP parts

Benefits

Simple handling of round or conic parts

Application advice

Usable with polyester repair resin

ArtNo.	Specification	SP	MOQ
125.421	0.5 m ²	1	12
125.422	1.0 m ²	1	12

Aluminium mesh

Aluminium repair mesh

Description

Aluminium repair mesh

Area of application

Modelizing of forms before using glass fibre mats or glass fibre fabric

Benefits

■ Simple handling of edged work pieces

Application advice

- Can be adapted to the form of the work piece by bending
- Usable with glass fibre putties

ArtNo.	Specification	SP	MOQ
126.041	25 × 20 cm	1	200

Dualmatic

Putty dispenser - manual



Description

- Dispenser for 3 kg putty cartridgesManual withdrawal
- Mobile putty dispenser, also suitable for table or wall mount

Area of application

Manual withdrawal of putty

Benefits

- Perfect ratio between putty and hardener
- Avoids wrong dosage

Application advice

Amount of hardener adjustable (summer / winter)

ArtNo.	Specification	SP	MOQ
123.892	for 3 kg cartidges	1	1
126.854	handle for Dualmatic	1	1
126.861	cut off with handle	1	1

Dispenser

Putty dispenser - pneumatic



Description

- Pneumatic putty dispenserFor 3 kg and 10 kg cartridgesWall mount only

Area of application

Pneumatic dispensing of putty and hardener

- Perfect ratio between putty and hardener
- Avoids wrong dosage

Application advice

Wall mount only

ArtNo.	Specification	SP	MOQ
123.859	A 3C	1	1
123.840	A 10C	1	1
136.912	sealing ring / white plastic sealing plug	1	1

Speedmixer 3 kg

For industrial and professional use only.

Putty dispenser



Description

- Pneumatic putty dispenser
 For 3 kg putty cartridges

Area of application

Automatic dosing and mixing of filler and hardener

- Perfect ratio between putty and hardener
 Avoids wrong dosage
 Bubble-free putty
 No hand mixing necessary

Application advice

Manual pre-injection of hardener

ArtNo.	Specification	SP	MOQ
151.017	Speedmixer 3 kg	1	1
152.088	Multi Green slow / Speedmixer / green / 2,523 kg cartridge incl. hardener	6	6
146.427	Mixing nozzles green (pack of 100 pcs.)	1	5

Speedmixer 10 kg

Putty dispenser-electro - pneumatic



Description

- Pneumatic putty dispenser For 10 kg putty cartridges

Area of application

■ Pneumatic mixing of putty

Benefits

- Perfect ratio between putty and hardenerAvoids wrong dosage
- Bubble-free putty
- No hand mixing necessary

Application advice

- Full automatic putty production
- Automatic pre-injection of hardener

ArtNo.	Specification	SP	MOQ
143.347	Speedmixer 10 kg	1	1
146.955	Mixing nozzles / yellow / XL (pack of 100 pcs.)	1	5
143.810	very slow / white / 10 kg cartridge incl. hardener	2	2
144.131	beige / 9,630 kg incl. hardener	2	2
143.205	slow / beige / 9,61 kg cartridge incl. hardener	2	2
145.419	very slow / beige / 9,77 kg cartridge incl. hardener	2	2
146.808	slow / beige / 6,94 kg cartridge incl. hardener	2	2
147.451	super slow / beige / 6,94 kg cartridge incl. hardener	2	2
149.614	slow / green / 8,18 kg cartridge incl. hardener	2	2

Putty Mix Board

Putty mix board

Description

- Putty mix board ■ 100 tear-offs
- Area of application
- Supporting plate to mix putty and hardener

Benefits

- Big area for putty mixingEasy disposal of the used tear-off
- No cleaning or sanding necessary



Putty Board

Plastic spreader



■ Plastic supporting plate

Area of application

Supporting plate for withdrawal of Speedmixer putty



ArtNo.	Specification	SP	моо	
142.889	10 pcs. bag	1	1	

Putty Knife

Steel spreader



Description

Steel spreader with a plastic handle

Area of application

■ Base for manual putty mixing

Benefits

Solvent resistant plastic handle

ArtNo.	Specification	SP	MOQ
137.435	60 mm	1	12
137.436	80 mm	1	12
137.437	100 mm	1	12

Plastic spreader

Plastic spreader

Description

■ Plastic spreader

Area of application

For mixing and applying putty manually

Benefits

- Solvent resistant
- Flexible

ArtNo.	Specification	SP	MOQ
146.961	115 × 77 mm	10	10

Blacky

Rubber spreader

Description

■ Rubber plastic spreader

Area of application

For mixing and applying putty manually

Benefits

- Solvent resistantExtremely flexible

ArtNo.	Specification	SP	MOQ
137.433	100 × 60 mm	10	10
137.434	80 × 50 mm	10	10

Japanese Putty Knife

Japanese steel blades

Description ■ Set of steel spreaders

4 steel spreaders
 (5, 8, 10 & 12 cm)

Area of application

For mixing and applying putty manually

Benefits

- Solvent resistant
- Perfect grade of stiffness

ArtNo.	Specification	SP	MOQ
139.356	1 Set	1	100

Easy Clean Box

Putty spreader cleaning box

Description

- Putty spreader cleaning box for reusable putty spreaders
- Solvent resistant

Area of application

For fast and easy cleaning of steel, plastic or rubber putty spreaders

Benefits

- Closed container for reduced smell
- Significantly cleaner workplace


Application advice

- We recommend the Carsystem H₂O Cleaner
- Slower evaporation and less smell

ArtNo.	Specification	SP	MOQ
153.206	spreader cleaning device	1	2



HAND MASK
EASY MASK MASKING FILM
MASTER TAPE FINE LINE TAPE
AUTO MASK MASKING PAPER WHEEL COVER
FOAMTAPE T-SOFT

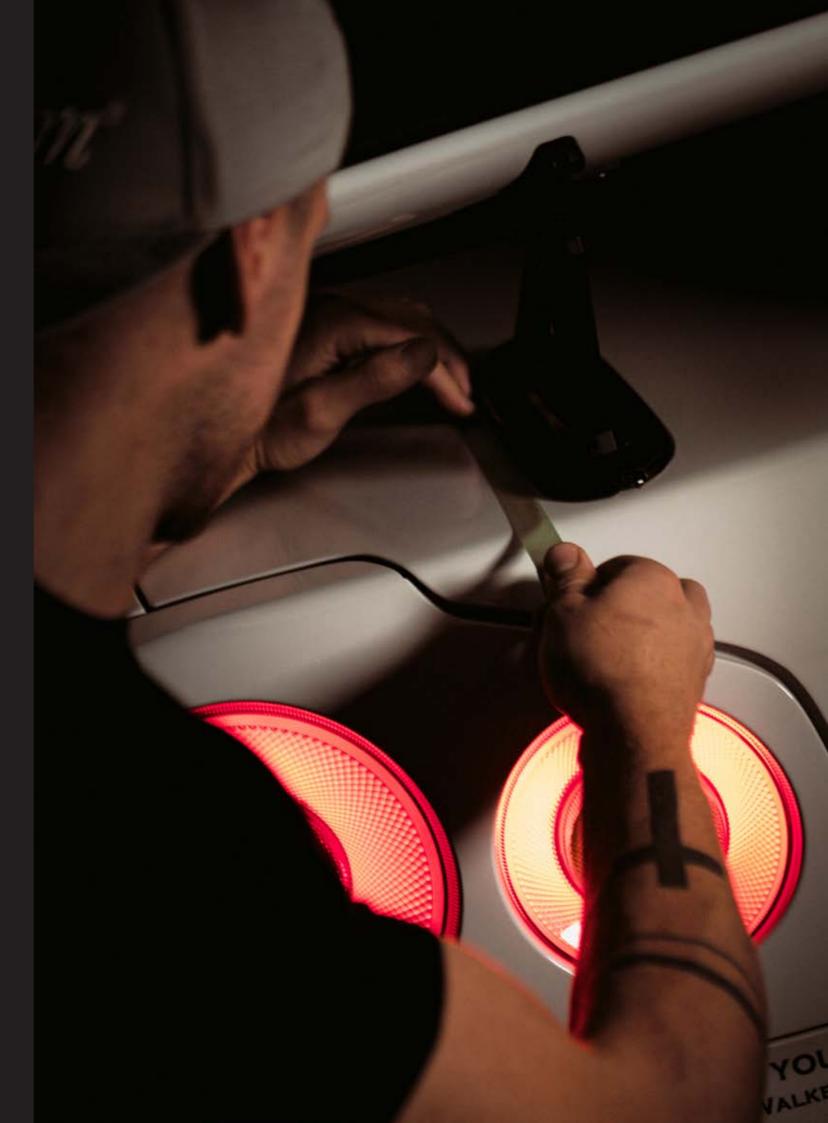

Masking Paper Master

Masking paper - Roll



Description	

- Special masking paper
- Both sides sealed
- Extremely tight
- Solvent resistant ■ 40 g/m²

Area of application

Masking paper for all masking work

ArtNo.	Specification	SP	MOQ
137.613	20 cm × 450 m	1	150
137.614	60 cm × 450 m	1	60
137.615	90 cm × 450 m	1	37
137.616	100 cm × 450 m	1	34
137.617	120 cm × 450 m	1	30
137.618	150 cm × 450 m	1	30
	137.613 137.614 137.615 137.616 137.617	137.613 20 cm × 450 m 137.614 60 cm × 450 m 137.615 90 cm × 450 m 137.616 100 cm × 450 m 137.617 120 cm × 450 m	137.613 20 cm × 450 m 1 137.614 60 cm × 450 m 1 137.615 90 cm × 450 m 1 137.616 100 cm × 450 m 1 137.617 120 cm × 450 m 1

Masking Paper Top II

Masking paper - Roll



Description

- Standard masking paper
- One side sealed
- Tight
 40 g/m²

Area of application

Standard masking paper for all masking work

ArtNo.	Specification	SP	MOQ
155.528	20 cm × 450 m	1	150
155.529	60 cm × 450 m	1	60
155.530	90 cm × 450 m	1	37
155.531	120 cm × 450 m	1	30
155.532	150 cm × 450 m	1	30

Masking film yellow

Masking film - Roll



Description

- Premium masking filmExtremely thick
- Paint adhesiveStrongly static
- Correction of masking tape possible
 Heat resistant up to 110°C
- Dust protected in a cardboard box

Area of application

■ Premium masking film for all masking work

Benefits

- Extremely tear-proof
- Perfect cutting abilityAvoids water marks from residual moisture
- One man use
- Sticks perfectly on the car and can be applied wrinkle-free
- The strong static avoids overspray from crawling under the film

Application advice

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it.

ArtNo.	Specification	SP	MOQ
155.572	400 cm × 200 m (middle folding)	1	28
155.573	500 cm × 120 m (middle folding)	1	28
156.948	600 cm × 100 m (middle folding)	1	28

Masking film blue

Masking film - Roll



Description

- Paint adhesive
- Strongly static
 Heat resistant up to 110°C
- Dust protected in a cardboard box

Area of application

Vehicles with residual moisture

Benefits

- High static

- Ingristatic
 One man use
 Sticks perfectly on the car and can be applied wrinkle-free
 The strong static avoids overspray from crawling under the film
 Avoids water marks from residual moisture

Application advice

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it

_				
ı	ArtNo.	Specification	SP	MOQ
	155.570	400 cm × 150 m (middle folding)	1	28
	155.569	$400 \text{ cm} \times 300 \text{ m}$ (middle folding)	1	18
_	155.571	500 cm × 120 m (middle folding)	1	28

Masking film green

Masking film - Roll



Description

- Standard masking film
- Paint adhesive
- Strongly staticHeat resistant up to 110°C
- Dust protected in a cardboard box

Area of application

Standard masking film for all masking work

Benefits

- High staticOne man use
- Sticks perfectly on the car and can be applied wrinkle-free
 The strong static avoids overspray from crawling under the film

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it

ArtNo.	Specification	SP	MOQ
155.565	$400\text{cm}\times300\text{m}$ (middle folding)	1	28
155.567	500 cm × 120 m (middle folding)	1	45
155.568	600 cm × 100 m (middle folding)	1	28

MMIR-Mask Aqua Tec

Masking film - Roll



Description

- Paint adhesive
- Slightly static
 Heat resistant up to 110°C
- Dust protected in a cardboard box

Area of application

Vehicles with residual moisture

Benefits

Avoids water marks from residual moisture

ArtNo.	Specification	SP	MOQ
151.038	400 cm × 150 m (middle folding)	1	24
152.055	500 cm × 120 m (middle folding)	1	24

MMIR-Mask Light Green

Masking film - Roll



Description

- Standard masking film
- Paint adhesive
- Slightly staticHeat resistant up to 110°C
- Dust protected in a cardboard box

Area of application

Standard masking film for all masking work

ArtNo.	Specification	SP	MOQ
150.453	400 cm × 150 m (middle folding)	1	28
150.454	400 cm \times 300 m (middle folding)	1	28
150.455	500 cm × 120 m (middle folding)	1	28
149.587	600 cm × 100 m (middle folding)	1	28

Easy Mask

Masking film - Roll

Description

- Masking filmSlightly static
- Heat resistant up to 110°C
 Dust protected in a cardboard box

Area of application

Standard masking film for all masking work

Application advice

Limited paint adhesion

ArtNo.	Specification	SP	MOQ
151.199	380 cm × 200 m (middle folding)	1	40
151.181	400 cm × 150 m (middle folding)	1	45

Auto Mask

Handy masking film incl. tape

Description

- Masking film with integrated adhesive tape
- Paint adhesiveStatic

Area of application For masking windows, bumpers and sillsManual use



ArtNo.	Specification	SP	MOQ
125.476	refill-roll 0.55 × 33 m	1	40
125.517	refill-roll 1.8 × 33 m	1	20
133.060	roll 2.70 × 20 m	1	20



- Masking film with integrated adhesive tape
- Static

Area of application

- For masking windows, bumpers and sills
- Manual use

ArtNo.	Specification	SP	MOQ
144.547	roll / 0,35 × 25 m	1	20
144.549	roll / 0,60 × 25 m	1	16
144.550	roll / 1,00 × 25 m	1	16
144.551	roll / 1,20 × 25 m	1	16
144.552	roll / 1,80 × 25 m	1	16
144.553	roll / 3,60 × 25 m	1	8

Protective Film SPF

Surface Protection Film - 60 cm × 20 m



Description

- Surface protection film
- Self-adhesive
 Structured surface has an anti-slip effect

NEW

Area of application

- Protective film for areas, which need protection against dirt,

- moisture, paint, oils

 Floors or surfaces in paint mixing rooms

 For smooth and rough surfaces such as wood, concrete, carpets Aircraft wings during repair and maintenance

Benefits

- Resistant to chemicals and solvents RecyclableCan be easily applied and removes without leaving any residue

Application advice

Only for indoor use (no weather resistance). The protective film SPF is not antistatic. We recommend checking the suitability very carefully when using in ATEX areas.

ArtNo.	Specification	SP	MOQ
158.145	60 cm × 20 m	1	1

MMIR Knife Premium

Cutter tool

Description

Cutter tool for plastic filmCoated blade

Area of application

■ For cutting plastic film

Art.-No.

151.513

Benefits

Injury protected due to an imbedded blade

Specification

film knife



SP

2 2

MOQ

Liquid Masking

Liquid Masking film

Description

- Liquid masking film

- Detergent included
 Water-based
 Water soluble and solvent resistant

Area of application

Protects the vehicle from overspray, polishing splashes, dust and slight mechanical damage

Benefits

- More environmently friendly than a plastic film
 Car can be moved safely in the work shop

Application advice

- We recommend the application with a new filler gun
 Nozzle: 1,8 2,2 mm

ArtNo.	Specification	SP	моо
138.718	transparent, red / 19 L	1	1

Master Tape Green

Masking tape

Description

- Allround masking tape
- Solvent resistant
- WaterproofTemperature resistant up to 110°C / 1h

Area of application

■ Suitable for all standard masking work

Benefits

Strong initial tack

ArtNo.	Specification	SP	MOQ
149.221	19 mm × 50 m	48	48
149.222	25 mm × 50 m	36	36
149.223	30 mm × 50 m	32	32
149.225	38 mm × 50 m	24	24
149.226	50 mm × 50 m	24	24

Master Tape II

Masking tape

Description

- High performance masking tape
 Highly solvent resistant

Area of application

140.206

- Waterproof
 Temperature resistant up to 120°C / 1 h

All masking work especially at high temperatures

Benefits Very strong initial tack

ArtNo.	Specification	SP	MOQ
140.201	15 mm × 50 m	60	60
140.202	19 mm × 50 m	48	48
140.203	25 mm × 50 m	36	36
140.204	30 mm × 50 m	28	28
140.205	38 mm × 50 m	24	24

50 mm × 50 m

24 24

Specification

15 mm × 50 m

19 mm × 50 m

25 mm × 50 m

 $30 \text{ mm} \times 50 \text{ m}$

38 mm × 50 m

 $50 \text{ mm} \times 50 \text{ m}$

Top Tape

Masking tape

Description

- Standard masking tape Temperature resistant
- up to 80°C / 1 h

Area of application

Art.-No.

139.262

139.263

139.264

139.265

139.266

139.267

Suitable for all standard masking work



MOQ

60

48

36

32

24

24

60

48

36

32

24

24

Fine Line Tape Blue

Fine line tape

Description

- Fine line tape
- PVC base Waterproof
- Temperature resistant
- up to 155°C / 1 h

Area of application

■ High solvent resistance

- Multi colour and design painting
- Masking of curves and long, straight lines
 Suitable for masking work on rubber and plastic surfaces

Benefits

- Highly flexible

-	Does	not	stretch	

3 mm × 33 m	40	
	10	10
6 mm × 33 m	10	10
9 mm × 33 m	10	10
12 mm × 33 m	10	10
19 mm × 33 m	10	10
	9 mm × 33 m 12 mm × 33 m	9 mm × 33 m 10 12 mm × 33 m 10

Slim Tape Green Special masking tape

Description

- Special masking tape
- Special paper base
- Extremely thin
- Waterproof ■ Temperature resistant up to 100°C / 1 h

Area of application

- Suitable for difficult surfaces e. g. rubber,
- plastics, door openers and chromed parts "Last tape" before painting

Benefits

- Small and handy, fits into every pocket
- High curve stabilityPerfect cutting ability
- Art.-No. Specification SP MOQ 150.081 18 mm × 18 m 8 200

Slim Tape

Special masking tape

Description

- Special masking tape
- Special paper base
- Extremely thin
- Waterproof
- Temperature resistant up to 100°C / 1 h

Area of application

- Suitable for difficult surfaces e. g. rubber, plastics, door openers and chromed parts
- "Last tape" before painting

Benefits

- High curve stability
- Perfect cutting ability

ArtNo.	Specification	SP	MOQ	
133.827	18 mm × 50 m	10	160	

Silver Tape

Fabric tape

Description

- Fabric tape
- Waterproof
 Temperature resistant up to 80°C / 3 h

Area of application

- Usable for different masking work
- Sanding edge protectionSupport tape for glued parts

High adhesion on a multitude of surfaces

ArtNo.	Specification	SP	MOQ
138.532	38 mm × 50 m	1	24
135.715	50 mm × 50 m	1	18

Black Tape

Fabric tape

Description

- Fabric tape Waterproof
- Temperature resistant up to 80°C / 3h



- Usable for different masking work
- Sanding edge protectionSupport tape for glued parts

Benefits

High adhesion on a multitude of surfaces

ArtNo.	Specification	SP	моо
147.753	50 mm × 50 m	1	18

WR-Lifting Tape Premium

Masking tape with plastic edge - perforated

Description

- Special tapePerforated maskig tape with a plastic edge
- Waterproof
 Temperature resistant up to 120°C / 1h

Area of application

For masking window sealings, lip seals, front and back lights and indicators

- 2 in 1, lenght wise perforated masking tape with a plastic edge in 9 mm and 11 mm
- Tape and plastic edge are perforated for easy tear off
- Paint edge disappears under the sealing

Application advice

■ We recommend to tear off from plastic to tape

ArtNo.	Specification	SP	MOQ
155.734	perforated / 9 + 11 mm × 10 m	1	24

WR-Lifting Tape

Masking tape with plastic edge

Description

- Special tapeMasking tape with a plastic edge
- Waterproof
 Temperature resistant
- up to 120°C / 1h

Area of application For masking window sealings, lip seals,

front and back lights and indicators

Benefits

Paint edge disappears under the sealing

ArtNo.	Specification	SP	MOQ
155.720	9 mm × 10 m	1	24





























FOAMTAPE T-SOFT

Foam tape



Description


- Special foam tape
 Silicone-free glue
 Temperature resistant up to 80°C / 1h

Area of application

- For closing gaps on doors, bonnets and trunk lids
 Protects inner areas from overspray

Benefits

- Avoids hard paint edges
- Easy placementPerfect edge finishNo glue residues
- Specification Art.-No. SP MOQ 157.974 1 1

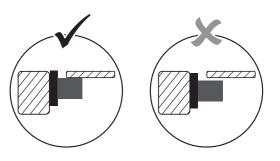

- Foam tape ■ Silicone-free alue
- Temperature resistant up to 80°C / 1h

Area of application

- For closing gaps on doors, bonnets
- and trunk lids
- Protects inner areas from overspray

Benefits

Avoids hard paint edges



Felgo Tape

Rim masking tape

Description

- Different dimensions for
- different rim sizes Composite backing film provides additional protection for the tire during the sanding
- process

 Temperature resistance: Approx. 60°C / 1h

FELGOTAPE

Area of application

■ Masking of rims before sanding and painting process

- Clean, easy and safe masking of the tire up to the edge of the rim
 Extremely hard-wearing special tape for additional protection of
- the tire during the sanding process

Application advice

Cleaning of the tire and rim ONLY with water or water-based cleaner

ArtNo.	Specification	SP	MOQ
148.861	13 mm × 50 m	1	140
148.862	19 mm × 35 m	1	84

ArtNo.	Specification	SP	MOQ
156.986	15 inch	50	4000
156.987	16 inch	50	4000
156.988	17 inch	50	4000
156.989	18 inch	50	4000
156.990	19 inch	50	4000

WM Tape

Adhesive Tape

Description

Packaging tape

Area of application

For sealing packages

Tec Line Stick

Sensor pad

Description

- Covers for parking sensors
- PET plastic
- Temperature resistant: -40°C up to +180°C
- Solvent resistant

Area of application

For covering parking sensors or key holes

Protection against sanding, painting and polishing

- Benefits
- Time saving
- No dismantling of parking sensors necessary

Application advice

■ We recommend to remove the sensor cover while the paint is still liquid to avoid paint edges

ArtNo.	Specification	SP	MOQ
152.553	150 pcs. / box / 12 mm	1	50
152.554	150 pcs. / box / 18 mm	1	50

Wheel Cover

Cover hood

Description

- Cover hood for car wheels
- Paint and heat protection
- aluminum sealed fabric Dust and waterproof

Area of application

- Fast masking of wheels before painting
- Protects car wheels from dust and overspray

ArtNo.	Specification	SP	MOQ
142.483	17 inches / 1 pack = 4 pcs	4	56
158.211	20-21 inches / 1 pack = 4 pcs	4	56

Seat Covers

Seat protection

Description

- Seat protection covers
- for vehicle seats

 Non-slip backside
- 500 pcs per roll

Area of application

Extremely tear resistant

- For protecting seats during the car repair
 Protects against water, dust, oil and paint

ArtNo.	Specification	SP	моо
142.940	$820 \times 1{,}300 \text{ mm} / 500 \text{ pcs. roll}$	1	1

Floor Mats

Foot space protection

Description

Protection mats for the car floor

Area of application

- For protecting the foot space during the car repair
- Protects against water, dust, oil and paint

ArtNo.	Specification	SP	MOQ
142.941	370×500 mm / 500 pcs. / roll	1	1

Wall Bracket

Wall Bracket for interior protection rolls

Description

- Wall bracket for Carsystem Seat Covers and Floor Mats interior protection rolls
- Space to store 3 rolls



ArtNo.	Specification	SP	MOQ
143.334	wall bracket	1	1

Steering Wheel Covers

Steering wheel protection




Protection for the steering wheel




Description

- For protecting the steering wheel during the car repair
 Protects against water, dust, oil and paint

ArtNo.	Specification	SP	MOQ
142.942	set incl. hand dispenser / 6 × 250 m / roll	1	1

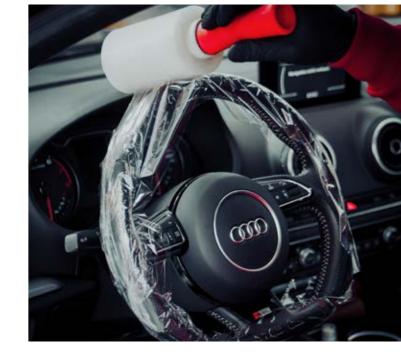

2K CARBO CLEAR PLUS RALLYE-SPRAY MULTI-MIX CUPS CC.21 X-PRESS FIVE ACRYL THINNER MIXING STICKS UV CLEAR PAIN AF.21 X-PERT PLASTIC PRIMER HPP PRIMER CC.20 X-PERT BOOTH MASK INTERFACE PAD PAINT SYSTEM CPS 1K EPOXY PRIMER 2K HIGH-SPEED KLARLACK 2K FILLER WET ON WET PLUS BUMPER PAINT SPRAY

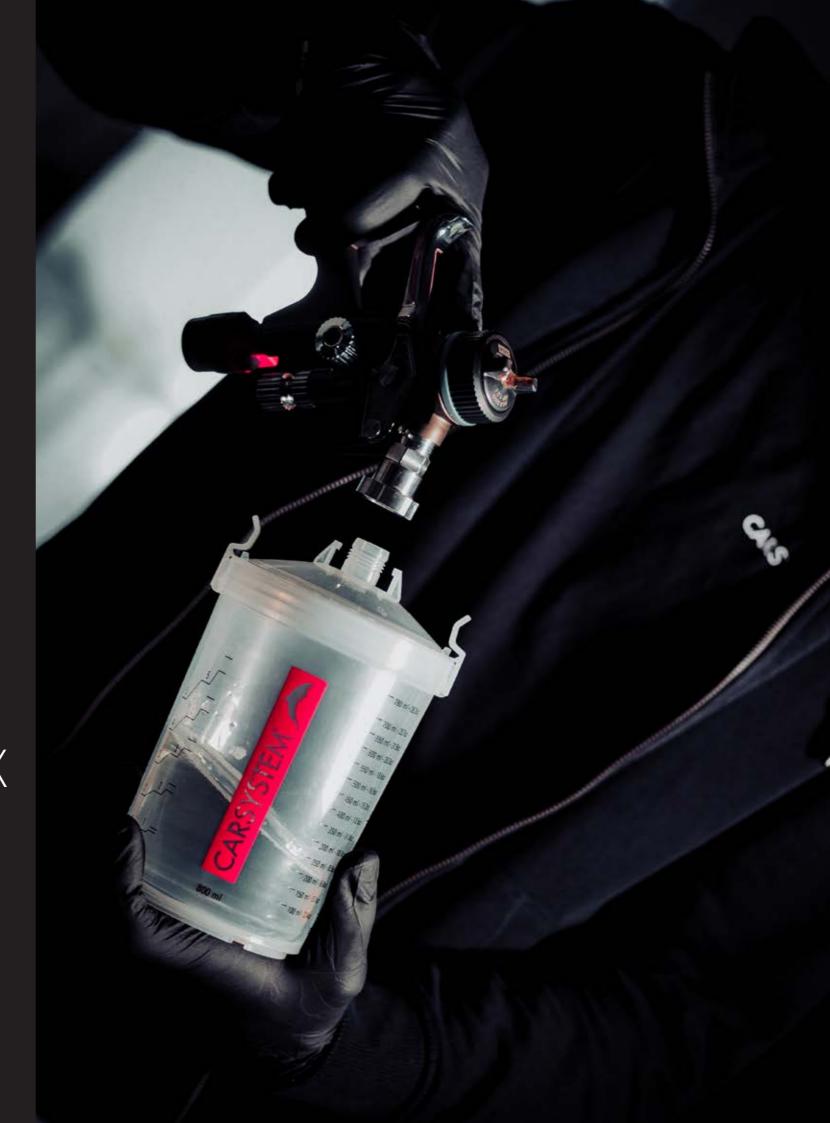



MORE THAN JUST Painting!

CC.21 X-PRESS FIVE

is an extremely fast drying 2K premium acrylic clear coat for small to medium paint works.

The CC.21 X-PRESS FIVE is VOC compliant, user-friendly and has excellent gloss and flow properties.





CC.20 X-PERT

is a fast drying 2K acrylic clear coat for all common painting work in a paint shop, from small parts to complete painting. The clear coat CC.20 X-PERT is VOC-compliant, very user friendly, has a very high final hardness and a brilliant gloss.

AF.21 X-PERT

is a universal 2K acrylic filler for all common paint works in a bodyshop from spot repair to full vehicle and can be set up as a high build filler as well as a wet-on-wet filler with a special thinner.



2K Clear VOC Speed Plus

2K Clear coat



Description

- 2K Acrylic clear coat
- Premium quality
 Drying time: 15 min / 60°C object temperature
 VOC compliant

Area of application

- All common paint works from spot repair to full vehicle
 Rapid work process for full vehicle painting required

Benefits

- Very fast drying
 Brilliant gloss
 Very good surface quality
 Very user friendly
 Extremely wear resistant

Application advice

■ We recommend a fast and efficient way of working for complete paint jobs

ArtNo.	Specification	SP	MOQ
152.563	A+B comp. / 1.5 l	1	12
151.899	A comp. / 5.0 l	1	4
151.901	Hardener / 2.5 l	1	4

NEW

CC.21 X-press FIVE

2K Clear gross



Description

- = 2K Acrylic clear coat
 = Premium quality
 = Drying time: 5 min / 60°C object temperature
 = VOC compliant

Area of application

■ For small to medium paint works

Benefits

- Extremely fast drying time
 Excellent gloss and flow properties
 Very user-friendly
- Very good surface quality

ArtNo.	Specification	SP	MOQ
158.251	A+B comp. / 1.5 I	1	12
158.249	A comp. / 5 I	1	4
158.250	Hardener / 2.5 I	1	4

CC.20 X-pert

2K Clear coat



NEW

Description

- 2K Acrylic clear coat
 All-purpose clear coat
 Drying time: 20 min. / 60°C object temperature
 VOC conform

Area of application

All common paint works in a paint shop from individual parts up to full vehicle paintings

Benefits

- Fast drying timeVery high final hardness
- Brilliant gloss

Application advice

We recommend a fast and efficient way of working for complete paint jobs

ArtNo.	Specification	SP	MOQ
158.423	A + B Comp. / 1,5 L	1	12
157.450	A comp. / 5 I	1	4
157.451	Hardener / 2.5 l	1	4

2K Clear VOC Premium

2K Clear coat



Description

- 2K Acrylic clear coat
- Universal clear coat
 Universal clear coat
 Drying time: 30 min / 60°C object temperature (hardener standard)
 VOC compliant
- Area of application

All common paint works from spot repair to full vehicle

Benefits

- Good surface qualityLong pot life

ArtNo.	Specification	SP	MOQ
146.714	A-comp. / 5 L	1	4
147.019	Hardener standard / 2.5 L	1	4
147.361	Hardener slow / 2.5 L	1	4
147.862	Hardener fast / 2.5 L	1	4

- = 2K Acrylic clear coat
 = Universal clear coat
 = Drying time: 30 min / 60°C object temperature (hardener standard)
 = VOC compliant

Area of application

All common paint works from spot repair to full vehicle

Benefits

■ High final surface hardness

ArtNo.	Specification	SP	MOQ
144.138	A-comp. / 1.0 L	1	12
144.140	Hardener 420 standard / 0.5 L	1	12
144.139	Hardener 421 fast / 0.5 L	1	12
142.953	A-comp. / 5.0 I	1	4
144.449	Hardener 422 slow / 2.5 L	1	4
144.107	Hardener 420 standard / 2.5 L	1	4
144.108	Hardener 421 fast / 2.5 L	1	4
144.446	Hardener 423 very fast / 2.5 L	1	4

2K Clear VOC CC.19 AS

2K Clear coat



Description

- 2K Acrylic clear coat
 Industrial clear coat
 Drying time: 25 min. / 60°C object temperature
 VOC compliant

Area of application

Small parts and spot repair

Benefits

- Especially high initial hardnessHigh UV, chemical and mechanical resistance

ArtNo.	Specification	SP	MOQ
156.931	A+B comp. / 1.5 I	1	12
156.929	A-comp. / 5.0 l	1	4
156.930	Hardener / 2.5 I	1	4

2K Clear VOC HS-SR

2K Clear coat



Description

- 2K Acrylic clear coat
- Universal industrial clear coat
 Drying time: 30 min / 60°C object temperature (hardener standard)
 VOC compliant

Area of application

All common paint works from spot repair to full vehicle

Benefits

- High scratch resistanceHigh initial hardness directly after curing

ArtNo.	Specification	SP	MOQ
153.223	A+B comp. / hardener slow / 1.5 l	1	12
153.774	A+B comp. / hardener standard / 1.5 l	1	12
151.909	A-comp. / 5.0 I	1	4
151.913	Hardener slow / 2.5 l	1	4
151.910	Hardener standard / 2.5 I	1	4
151.911	Hardener fast / 2.5 l	1	4

2K Clear VOC Matt

2K Clear coat matt



Description

- 2K Acrylic clear coat matt
 Matt level: Matt 148.983
 Matt level: Silk-matt 148.986
- Drying time: 30 min / 60°C object temperature (hardener standard)
 VOC compliant

ArtNo.	Specification	SP	MOQ
148.983	A-comp. matt / 1.0 I	1	12
148.986	A comp. silk-matt / 1.0 l	1	12
148.985	Hardener standard / 0.5 I	1	12
148.984	Hardener fast / 0.5 l	1	12

2K Carbo Clear Plus

2K Carbo clear coat



Description

- 2K Acrylic clear coat
 Premium clear coat for carbon surfaces
 Drying time: 15 min. / 60°C object temperature
 VOC compliant

Area of application

■ Special clear coat for carbon parts

Benefits

- Very fast drying time
- Brilliant glossVery good surface quality
- Very user friendlyExtremely wear resistant
- High UV protection

ArtNo.	Specification	SP	MOQ
153.217	A-comp. / 1 L	1	12
153.218	Hardener / 0.5 L	1	12
153.207	A-comp. / 5 L	1	4
153.208	Hardener / 2.5 L	1	4

UV Clear

Transparent UV Clear coat

Description

- UV clear coat
- Clear coat for dap application
- Drying time: 30 60 sek. (CS UV lamps)
 VOC compliant

Area of application

Filling of pinholes, small scratches and stone chips in the clear coat

Extremely time savingPerfect solution for spot repairs



ArtNo.	Specification	SP	MOQ
154.528	transparent / 100 ml	1	20

UV Filler Spray

UV Filler Spray

Description

UV Filler spray

Area of application

■ Spot repair

Filling of small parts

Benefits

- 100% rust protection
- Extremely time saving

Application advice

- On plastic substrates, the Carsystem plastic
- primer must be applied first

 On steel, aluminium and galvanized steel the
 Carsystem Etch Primer or 1K Epoxy Primer
 must be applied first



ArtNo.	Specification	SP	MOQ
154.190	transparent grey / 400 ml	1	6

EF.21 EP-Filler

2K Hybrid Füller



Description

- 2K Hybrid filler acrylic / epoxy
- Universal fillerColour: yellowish (approx RAL 7032)
- Drying time: Standard: 30 min / 60 °C objecttemperature
 Wet-on-wet: 30 min / 20 °C objecttemperature
- VOC compliant

NEW

Area of application

- For all common filler applications on small parts or complete cars
 Adhesion to steel, aluminium, KTL, old and new coatings on and under polyester puttys

Benefits

- Settable as wet-on-wet
- High corrosion resistanceExcellent sandability
- Chromate free

ArtNo.	Specification	SP	MOQ
158.248	A + B-Comp. / 1.5 L	1	4
158.246	A-Comp. / 5 L	1	12
158.247	Hardener / 2.5 L	1	12

AF.21 X-pert

2K Acrylic Filler



Description

- 2K Acrylic filler Universal filler
- VOC compliant

NEW

Area of application

- All common paint works from spot repair to full vehicle
 Very good adhesion to steel, aluminium, e-coat primers and polyester fillers
- Painting new parts with e-coat primers
- Anti corrosions protection

Benefits

- Settable as wet-on-wet
- Excellent sandability
 Layer thicknesses can be flexibly adjusted
- (from low to very high layer thicknesses)

 Application on e-coat primers without sanding

ArtNo.	Specification	SP	моо
158.216	A-Comp. / white / 3.6 L	1	4
158.218	A-comp. / grey / 3.6 L	1	4
158.219	A-comp. / black / 3.6 L	1	4
158.220	Hardener / 0.9 L	1	4
158.221	Thinner standard / 1 L	1	12
158.222	Thinner wet-on-wet / 1 L	1	12

AF.21 1K Filler

1K Hybrid filler



Description

- 1K Hybrid filler acrylic / epoxy
 Drying time: 10 min / 60°C object temperature
- VOC compliant

NEW

Benefits

- 100% rust protection
- Very user friendly
 Very good sandability
- Art.-No. Specification SP MOQ 158.244 grey / /1L 12 158.245 Thinner / /1L 12

2K VOC Filler 540

2K Acrylic filler



Description

- 2K Acrylic filler
- Universal filler
 Drying time: 30 45 min / 60°C object temperature (hardener standard)
- VOC compliant

Area of application

All common paint works from spot repair to full vehicle

Benefits

- High filling powerVariable due to three different hardeners
- Winter hardener CT available for low temperatures

ArtNo.	Specification	SP	MOQ
144.541	A+B comp. / hardener very fast / white / 1.25 L	1	12
147.432	A+B comp. / hardener standard / grey / 1.25 L	1	12
144.539	A+B comp. / hardener very fast / grey / 1.25 L	1	12
144.540	A+B comp. / hardener very fast / black / 1.25 L	1	12
149.816	Hardener / very fast / 0,25 I	1	24
144.354	A-comp. / white / 3.6 L	1	4
144.026	A-comp. / grey / 3.6 L	1	4
144.353	A-comp. / black / 3.6 L	1	4
144.977	Hardener VOC 541 / standard / 0,9 I	1	12
144.027	Hardener very fast / 0.9 L	1	12
153.493	Hardener VOC 541 CT / 0,9 I	1	12

2K Filler Vario Plus

2K Acrylic filler



Description

- 2 K Acrylic filler

 High build filler

 Colour: Light grey

 Drying time: Normal layer: 30 35 min / 60°C object temperature High build: 45 min / 60°C object temperature
- VOC compliant

Area of application

- All common paint works from spot repair to full vehicle
 Also usable as high build filler
- Filler: 60 to 180µ
 High build filler: 85 to 255µ

Benefits

- Very high filling powerThe filler can be variably adapted by adding up to 30 % thinner

ArtNo.	Specification	SP	MOQ
152.058	A+B comp. / light grey / 1.2 L	1	12
152.057	A-comp. / light grey / 3.5 L	1	4
147.682	Hardener / 0.7 L	1	12

2K Filler Air Plus

2K Acrylic filler



Description

- 2K Acrylic filler
- Express filler
 Drying time: 15 20 min / 60°C object temperature
- VOC complaint

Area of application

- Perfectly suitable for small parts, spot repair and air drying
 All common paint works from spot repair to full vehicle

Benefits

- Fast air-dryingVery good sandability

ArtNo.	Specification	SP	MOQ
152.580	A + B comp. / grey / 1.25 L	1	12
152.416	A-comp. / white / 3.6 L	1	4
152.417	A-comp. / grey / 3.6 L	1	4
152.418	A-comp. / black / 3.6 L	1	4
152.419	Hardener / 0.9 L	1	12



2K Filler Wet on Wet Plus

2K Acryl filler



Description

- = 2K Acrylic filler = Wet-on-wet filler

- Drying time:
 Wet-on-wet: 15 20 min / 60°C object temperature
- Sanding filler: 20 min / 60°C object temperature
 VOC complaint

Area of application

■ Painting new parts with e-coat primers

- Application on e-coat primers without sanding
- Rust protection on bare metal parts

ArtNo.	Specification	SP	MOQ
153.455	A+B - comp. / grey / 1.05 L	1	12
153.456	A-comp. / grey / 3.6 L	1	4
153.457	Hardener / 0.6 L	1	12

Tinting paste filler

Tinting paste

Description

Tinting paste

Area of application

- Tinting paste for Carsystem acrylic fillers

 Max. addition: 1 – 5 %

Benefits

For matching the filler to the basecoat shade Application advice

avoid adhesion problems

Mix tinting paste and A-component first before adding the hardenerto



ArtNo.	Specification	SP	MOQ
148.505	red / 0.5 L	1	30
148.504	black / 0.5 L	1	30

Elastic Additive

Elasticizer

Description

Elastic additive

Area of application


- Additive for Carsystem acrylic fillers and clear coats
- For painting flexible substrates
 Addition up to 20 %

Benefits

- Improvement of flexibility
- Minimizes the risc of cracks

Application advice

Mix additive and A-component first before adding hardener to avoid adhesion problems



ArtNo.	Specification	SP	MOQ
155.543	transparent / 1 L	1	12

High Gloss Additive

High gloss additive

Description

■ High gloss additive

Area of application

■ Additive for all Carsystem clear coats

Benefits

Improves gloss and surface quality



ArtNo.	Specification	SP	MOQ
152.788	transparent / 1 L	1	12

Acryl Thinner

Acrylic thinner

Description

Acrylic thinner

Area of application

■ For all Carsystem fillers and clear coats



150.331 transparent / standard / 1 I 1 12 141.479 transparent / standard / 5 I 1 4 153.171 transparent / slow / 5 L 1 4	ArtNo.	Specification	SP	MOQ
	150.331	transparent / standard / 1 l	1	12
153.171 transparent / slow / 5 L 1 4	141.479	transparent / standard / 5 I	1	4
	153.171	transparent / slow / 5 L	1	4
152.456 transparent / fast / 5 l 1 4	152.456	transparent / fast / 5 I	1	4

Activator

Reaction accelerator

Description

Reaction accelerator additive

Area of application

- Additive to speed up the drying process of Carsystem fillers and clear coats
- Max. addition in fillers: 10 %
 Max. addition in clear coats: 2 %

Benefits

- Accelerates the drying time about 15 %
- Only usable with standard or slow hardeners to avoid adhesion problems or matting



ı	ArtNo.	Specification	SP	мод
	147.695	1L	1	12

Spotblender

Blending thinner

Description

Blending thinner

Area of application

For homogeneous transition zones between old and new paint for 1K and 2K clear coats and 2K top coats



ArtNo.	Specification	SP	MOQ
148.989	1L	1	12



Disposable mixing cups

Area of application

For clean and accurate mixing of all fillers, base coats, clear coats etc.

Application advice

Use only the scale of the mixing cup and not additionally the scale of a measuring stick. Cups are conic so there could be a difference

ArtNo.	Specification	SP	MOQ
140.545	cup / 385 ml	200	200
140.546	cup / 750 ml	200	200
140.547	cup / 1400 ml	200	200
140.548	cup / 2300 ml	100	100

Multi Mix Lids

Disposable lids



ArtNo.	Specification	SP	MOQ
140.549	lid / 385 ml	200	200
140.550	lid / 750 ml	200	200
140.551	lid / 1400 ml	200	200
140.552	lid / 2300 ml	200	200

Description

Lid for disposable Multi-Mix Cups

Area of application

- For sealing the Carsystem Multi-Mix Cups and Multi-Mix Cups 2.0
 For storing residual material in the Multi-Mix Cups in an airtight,
- clean manner

ArtNo.	Specification	SP	MOQ
140.549	lid / 385 ml	200	200
140.550	lid / 750 ml	200	200
140.551	lid / 1400 ml	200	200
140.552	lid / 2300 ml	200	200

Dispenser Multi-Mix

Wall bracket for Multi-Mix Cups



Description

■ Dispenser for Multi-Mix Cups

Area of application

For Carsystem Multi-Mix Cups

Benefits

- Space-saving storage
- Protection against contamination from the environment

ArtNo.	Specification	SP	MOQ
137.664	0.385 L	1	1
137.665	0.75 L	1	1
137.666	1.4 L	1	1
137.667	2.3 L	1	1

Plastic Can Empty

Paint tins

- Description
- Plastic paint tinSolvent resistant
- Tacky labels included

Area of application

- Stock of solvent and
- water based paint

 Long stock life due to the airtight closing lid

Benefits

- Hard and very stable plastic tin
- Airtight lid prevents content from drying out

ArtNo.	Specification	SP	MOQ
144.957	0.5 L / 100 pcs. per carton	100	100
144.958	1.0 l / 100 pcs. per carton	100	100
145.784	1.8 L / 100 pcs. per carton	100	100

Multi-Mix Bucket

Paint mixing bucket

Description

Disposable paint mixing bucket with a handle

Area of application

- For mixing bigger quantities of paint material
 For trucks, busses, rail vehicles etc.

Benefits

- Very stableAntistatic





Paint System CPS

Disposable paint cup system



Description

■ Disposable paint cup system

Area of application

For processing water-based and solvent-based paint systems

Benefits

- Overhead painting is possible
- Clean work due to mixing in the painting cup
- Storage of residual material is possible

Application advice

- We recommend to empty the paint channel before removing the cup:
 Hold the gun upside down, close the nozzle and pull the trigger briefly
 The paint channel is now completely empty and the cup can be removed without dripping

ArtNo.	Specification	SP	MOQ
158.056	Set / 400 ml - 125μm / 50 pc	1	1
158.057	Set / 600 ml - 125μm / 50 pc	1	1
158.067	Set / 800 ml - 125µm / 26 pc	1	1
158.063	Adapter A7 Devilbiss	1	1
158.064	Adapter A5 Iwata W400 + Sata external thread	1	1
158.065	Adapter A87 Iwata WS400	1	1
158.066	Adapter A82 Sata QCC	1	1
158.059	Lids / 200-400 ml / 125 µm / 25 pc	1	1
158.061	Lids / 600-800 ml / 125µm / 25 pc	1	1
158.062	Lids / 600-800 ml / 190 μm/ 25 pc	1	1
158.472	Hard cup / 400 ml	1	5
158.473	Hard cup / 600 ml	1	5
158.474	Hard cup / 800 ml	1	5

Mixing Stick Alu

Measuring stick

Description

Aluminium based stir and measuring stick Printed scale with different mixing ratios

Area of application

- For stiring and mixing of paint materials
- For measuring the right mixing amounts of Carsystem fillers and clear coats

Application advice

■ To use only with cylindric containers



ArtNo.	Specification	SP	MOQ
146.695	2:1 / 4:1 / 370 × 32 mm	1	100
147.359	5:1 / 6:1 / 370 × 32 mm	1	100

Mixing Stick Black

Plastic mixing stick

Description

- Plastic mixing stick Solvent resistant
- Nicely flexible

Area of application

■ For easy stiring and mixing of paint materials

ArtNo.	Specification	SP	MOQ
144.752	23 × 1.8 cm	100	100

Multi Strain

Paint strainer

Description

- Disposable paint strainer
- Paper funnel with precise nylon-based filter mesh

Area of application

Filtration of all common painting materials



ArtNo.	Specification	SP	MOQ
146.957	blue / 125 μ	125	1000
146.958	yellow / 190 μ	125	1000

Dispenser

Dispenser for paint strainers

Description

- Dispenser for paint strainers Space for 150 paint strainers
- Area of application

For paint strainers

Benefits

■ Space-saving solutionProtection against contamination from dust and overspray

ArtNo.	Specification	SP	MOQ
146.960	Dispenser	1	1



- Booth protection mask
- Colour: White
- Water-based
- Forms a highly opaque, shiny film

Area of application

- Protects the spray booth walls against overspray
 Perfectly suitable for paint booths which cannot be cleaned with water

Benefits

- Covers all existing paint residuesProvides perfect light conditions
- Forms a high layer thicknessEasy to remove

Application advice

■ We recommend a nozzle size of 2.2 - 2.5 mm

ArtNo.	Specification	SP	MOQ
153.205	white / 19 L	1	1

Booth Mask

Booth protection mask



Description

- Booth protection mask
- Colour: Transparent ■ Water-based
- Provides a glass clear, tack free protection film

Area of application

- Protects booth walls and lightings against overspray
 Perfectly suitable for lightings and paint booths which cannot be cleaned with water

Benefits

- Biodegradable

- Blodegradable
 Glass clear
 Does not influence the light conditions
 Protects for 3 month or 150 paint cycles
 Forms a tack free film, which can be peeled off

Application advice

■ We recommend a nozzle size of 1.8 – 2.2 mm

ArtNo.	Specification	SP	MOQ
149.358	transparent / 5 I	1	4
149.359	transparent / 20 L	1	1

Booth Mask Stick

Booth protection mask



Description

- Booth protection maskColour: Transparent

- Water-based
 Provides a clear, tacky protection film

Area of application

- Protects booth walls and lightings against overspray
 Perfectly suitable for booth walls
- Absorbs the overspray

Benefits

- BiodegradableDust and lints stick on the tacky filmWater soluble

Application advice

■ We recommend a nozzle size of 1.8 – 2.2 mm

ArtNo.	Specification	SP	MOQ
149.338	transparent / 5 L	1	4
149.339	transparent / 20 L	1	1
149.340	transparent / 25 L	1	1

Dust Keeper

Dust binding agent



Description

- Dust binding agent for the floorColour: TransparentWater-based

Area of application

- Application on the spay booth floor to hold down the dust
 For show rooms e. g. car dealers

■ Improved paint quality by reducing the dust inclusions

Application advice

■ We recommend using a pump spray bottle

ArtNo.	Specification	SP	MOQ
149.341	transparent / 5 L	1	4

2K Spot repair clear coat

Description

2K Acrylic clear coat spray

Area of application

- For painting small parts
- Especially suitable for spot repair

Benefits

- No spray gun application necassary
- Very fine atomisation
 Long pot life



ArtNo.	Specification	SP	MOQ
157.795	250 ml	1	6

2K High-Speed Klarlack

2K Spot-repair clear coat

Description

2K Acrylic clear coat spray

Area of application

- For painting small parts
- Especially suitable for spot repair

Benefits

- No spray gun application necessary
- Very fine atomisationLong pot life



ArtNo.	Specification	SP	MOQ
149.421	transparent / 400 ml	1	6

Spotblender Spray

Blending thinner spray

Description

Blending thinner spray

Area of application

Art.-No.

145.987

For homogeneous transition zones in the blending area of 1K and 2K clear coats as well as top coats

Specification

transparent / 400 ml

Benefits

No spray gun application necessary



MOQ

12

1

Plastic Cleaner

Plastic cleaner

Description

■ Plastic cleaner spray

Area of application

- For all car and truck cleaning inside and outside Removes dirt, fat, oil, silicone, wax,
- tar and glue residues

 Suitable for spot repairs

Application advice

- Not an interiour cleaner
- Only for plastic surfaces prior to painting



ArtNo.	Specification	SP	MOQ
145.985	transparent / 400 ml	1	12

2K Epoxy Grundierfüller

2K Spot-repair epoxy primer

Description

- 2K Epoxy filler spray Colour: Light grey

Area of application

- For primering small partsEspecially suitable for spot repair

Benefits

- Variable spray nozzlePerfect adhesion and rust protection properties
- Free of isocyanate

Art.-No.

149.424



1

MOQ

S.21 Spotblender

Blending paint spray

Description

■ Blending paint spray

Area of application

 For homogeneous transition zones in the blending area of 1K and 2K clear coats as well as 2K top coats

Very good solving abilityNo spray gun application necessary



ArtNo.	Specification	SP	MOQ
157.762	transparent / 400 ml	1	6

S.21 Plastic Primer

Plastic Primer

Description

■ Plastic primer spray

Area of application

- For all car and truck plastic parts inside
- and outside

 Suitable for spot repairs

■ Slight silver pigmentation highlights primed areas



Ar	tNo.	Specification	SP	MOQ
15	7.759	silver-transparent / 400 ml	1	6

Plastic Primer

Plastic primer

Description

- Plastic primer sprayColour: Transparent

Area of application

- For all car and truck plastic parts inside and outside
- Suitable for spot repairs

Application advice

■ Not suitable for PE and PC



ArtNo.	Specification	SP	MOQ
145.986	transparent / 400 ml	1	12

Specification light grey / 400 ml



- 1K Plastic primer
- Special primerWet-on-wet primer for plastic parts
- Drying time: Wet-on-wet 15 min / 20°C object temperature

Area of application

■ Prior to painting of solvent resistant raw plastic parts (e.g. PP, PVC, EPP, PP-EPDM)

Benefits

- Extremely time savingNo pretreatment of the plastic (cleaning with alcohol-based plastic cleaner is mandatory)

Application advice

- We recommend for the cleaning of plastic parts
 the Carsystem ISO-VE 7030 cleaner
 Not suitable for PE/PC

ArtNo.	Specification	SP	MOQ
154.706	white / 1 kg	1	12
154.707	grey / 1 kg	1	12
154.708	black / 1 kg	1	12
154.712	thinner / 1 L	1	12

S.21 1K Primer

1K filling primer



NEW

Description

- 1K Primer spray
- Filling primer

Area of application

- Spot and partial paintings
- Isolating of sanded through spots
 Overpaintable with water and solvent based paints
- Overpaintable wet-on-wet

Benefits

- Rust protection
- Primer and filler in one step
 Free of chromates

ArtNo.	Specification	SP	MOQ
158.107	white / 400 ml	1	6
158.108	grey / 400 ml	1	6
158.109	black / 400 ml	1	6

1K Epoxy Primer

1K Epoxy primer



Description

- 1K Epoxy primer sprayColour: Grey

Area of application

- Spot and partial paintingsIsolating of sanded through spots
- Overpaintable with water and solvent based paints

Benefits

- Highest possible rust protectionPerfect isolation against moistureUV resistant

Application advice

- Damaged areas on metal substrates must be thoroughly cleaned with silicone remover

- When used as a primer, we recommend to apply a 2K filler on top

 When used in several layers or in high layer thickness, overpainting can be done wet-on-wet with water or solvent based paints

ArtNo.	Specification	SP	MOQ
151.958	grey / 400 ml	1	12

1K Easy Primer

1K Filling primer



Description

■ 1K Primer spray

Area of application

- Spot and partial paintings
 Isolating of sanded through spots
 Overpaintable with water and solvent based paints
 Overpaintable wet-on-wet

Benefits

- Rust protection primer and filler in one step
- Free of chromate

ArtNo.	Specification	SP	MOQ
151.537	white / 400 ml	1	12
151.538	grey / 400 ml	1	12
151.539	black / 400 ml	1	12



- 1K Acrylic filler spray
- High build primer

Area of application

- Spot and partial paintingsFilling small spots prior to painting
- Overpaintable with water and solvent based paints

Benefits

- High filling and opacity power
 Time saving compared to the use of a spray gun
 Suitable for wet and dry sanding
- Free of chromates and lead

ArtNo.	Specification	SP	MOQ
157.763	white / 400 ml	1	6
157.764	lightgrey / 400 ml	1	6

1K Easy Filler

1K High build primer



Description

- 1K Acrylic filler spray
- High build primer

Area of application

- Spot and partial paintings
- Filling small spots prior to painting
 Overpaintable with water and solvent based paints

Benefits

- High filling and opacity powerTime saving compared to the use of a spray gun
- Suitable for wet and dry sanding ■ Free of chromate

ArtNo.	Specification	SP	MOQ
151.521	white / 400 ml	1	12
151.522	lightgrey / 400 ml	1	12
151.523	black / 400 ml	1	12

Replacement Spray Head

Replacement Spray Head adjustable

Description

- Replacement spray head adjustableSuitable for:
- 1K Epoxy Primer ■ 1K Easy Primer
- 1K Easy Filler



Primer Surfacing Spray

Primer spray

Description

- Primer sprayNitro-combi-basedColour: Grey

Area of application

Primer for all paint works

- Good rust protection properties
- Weather resistant



ArtNo.	Specification	SP	MOQ	ArtNo.	Specification	SP	МО
153.793	Replacement Spray Head adjustable	1	300	126.024	grey / 400 ml	1	12

Primer Spray

Primer spray

Description

- Primer sprayAlkyd resin-based

Area of application

Art.-No.

125.949

132.907

■ Primer for all paint works

Benefits

Very good rust protection properties



SP

Specification red brown / 400 ml

grey / 400 ml

MOQ

12

12

Etch Primer Primer

Description

Rust protection spray

Area of application

- Specific for repairing of original primers on
- aluminum car bodies

 Isolating of sanded trough spots
- Adhesion promoter on all steel, zinc, aluminum substrates for spot and partial paintings

- Easy to useFast flash off and drying time



ArtNo.	Specification	SP	MOQ
143.028	grey / 400 ml	1	6

Specification

grey / 400 ml

Description

Spray putty aerosol Acrylic-based

Area of application

Levelling of small imperfections and isolating polyester putty layers

Benefits

- Outstanding high filling powerShort drying time
- Quickly sandable

Art.-No.

125.580



MOQ

12

1

S.21 Zinc-Spray

Area of application



ArtNo.	Specification	SP	MOQ
157.761	darkgrey / 400 ml	1	6

Rust protection

Description

Rust protection sprayTemperature resistant up to 400°C

Rust protection for the body interior in spot welding

Cold galvanizing of metal surfaces



Zinc Spray

Rust protection

Description

- Rust protection sprayTemperature resistant up to 490°C
- (acc. DIN50976, 53167, 50021, 53151)

Area of application

Art.-No.

126.030

- Rust protection for the body interior in spot welding
- Cold galvanizing of metal surfaces



SP

1

MOQ

12

Rallye-Spray Premium

Paint spray - black glossy

Description

Acrylic paint spray

Area of application

- Repair of imperfections in the paint
- Paint application on new parts

Benefits

= High opacit

Art.-N

149.219

Fast dryingPolishable

No.	Specification	SP M	100
		WOOD	e)it
		-	Margariti.
g		glant in non-public negra bette	40
ity		Makes grave Makes grave mark to the	=
		SPAA	

black glossy / 500 ml

Rallye-Spray Premium

Specification

black matt / 500 ml

Specification

black matt / 400 ml

Paint spray - black matt

Description

Acrylic paint spray

Area of application

- Repair of imperfections in the paint
- Paint application on new parts

Benefits

- High opacityFast drying

Art.-No

149.218



1 6

Rallye-Spray gloss

Paint spray - gloss

Description

Acrylic paint spray

Area of application

Repair of imperfections in the paint

Benefits

- Fast dryingPolishable



ArtNo.	Specification	SP	MOQ
126.053	white glossy / 400 ml	1	12
126.026	black glossy / 400 ml	1	12

Rallye-Spray matt

Paint spray - matt

Description

Acrylic paint spray

Area of application

Art.-No.

126.027

Repair of imperfections in the paint

Benefits

■ Fast drying



SP

1

MOQ

12

Protects parts in the engine compartment and exhaust pipes

Extremely high temperature resistance

Silicone resin based paint spray
 Temperature resistant up to 650°C

Thermo-Spray Paint spray - heat resistant

Description

Area of application



ArtNo.	Specification	SP	MOQ
126.086	black / 400 ml	1	12
126.087	silver / 400 ml	1	12

PRODUCTCATALOGUE 2022 | CARSYSTEM >

Specification

grey / 400 ml

6

1

Specification

silver / 400 ml

Specification

transparent - glossy / 400 ml

S.21 Silver Wheel

1K Silver wheel spray

Description

Nitro combination paint spray

Area of application

For painting steel and aluminium rims

Benefits

- High opacityAbrasion resistant
- Resistant against salt, stone chips etc.
- Weather resistant

Art.-No.

157.760



MOQ

6

1

Silver Wheel

Silver wheel spray

Description

Acrylic paint spray

Area of application

■ For painting steel rims

Abrasion resistant ■ Weather resistant



ArtNo.	Specification	SP	MOQ
126.021	silver / 400 ml	1	12

S.21 1K Clear Coat

1K Spot repair clear coat

Description

1K Clear coat spray

Area of application


Especially suitable for spot repair

Benefits

- Fast drying

Art.-No.

157.758





MOQ

1

Clear Coat Spray

Paint spray - transparent

Description

■ 1K Clear coat spray

Area of application

■ Spot repair

Benefits

■ Fast drying and polishable



ArtNo.	Specification	SP	MOQ
126.025	transparent glossy / 400 ml	1	12

Bumper Paint Spray

Bumper spray

Description

Acrylic paint spray

Area of application

Repairs and renewals of old, faded out or damaged plastic parts

Benefits

- No plastic primer needed
- No spray gun application necessary

Specification

grey / 400 ml

black / 400 ml

Specification

black / 1.0 I

Application advice

Art.-No.

142.820

142.821

■ Usable on PP, PP/EPDM, ABS



1

6

6

Bumper Structurant Spray

Bumper structurant spray black

Description

Acrylic structurant paint spray

Area of application

- Repairs and renewals of old, faded out
- or damaged plastic parts Re-forms the structure close to the original

- No plastic primer needed
- No spray gun application necessary



ArtNo.	Specification	SP	MOQ
142.982	black / 400 ml	1	12

Bumper Paint

Structurant paint for plastics

Description

Acrylic structurant paint

Area of application

Art.-No.

147.447

- Repairs and renewals of old, faded
- out or damaged plastic parts

 Re-forms the structure close to
- the original

Benefits

- No plastic primer needed
- Can be applied directly to the plastic without prior priming



SP

1

MOQ

12

Prefill-Spray

Aerosol tin - fillable

Description

- Pre-fill paint sprayFilled with 275 ml propellant, solvent and additives
- To be filled with 100 ml paint
- Area of application

Fillable with solvent based paint

Replaces a spray gun in spot repairs

Application advice

Filling machine required



ArtNo.	Specification	SP	MOQ
125.686	without pin / 275 ml	1	12

- Pre-fill paint sprayFilled with 300 ml propellant,
- solvent and additives

 To be filled with 100 ml paint

Area of application

Fillable with water based paint

Benefits

Replaces a spray gun in spot repairs

Application advice

Filling machine required



Spray Head

Replacement spray head red

Description

- Replacement spray head red
- Suitable for:
- Prefill Spray
 Prefill Spray Water



ArtNo.	Specification	SP	MOQ
140.608	without pin / 300 ml	1	12

Specification

200 pcs. per box / white 200 pcs. per box / dark grey

ArtNo.	Specification	SP	MOQ
145.840	spray nozzle spare part / red	1	100

	-		
145.840	spray nozzle spare part / red	1	100

Spray Out Cards Metall

Colour match card

Description

Colour match cards metal

Area of application

Colour matching

Art.-No.

153.758

153.759



MOQ

1 5

Colour match card

Description

Colour matching card
Paper based kit with 250 pcs. incl. holder

Area of application

- Colour matching
- Disposable cards

Application advice

Art.-No.

141.109

Not suitable for water-based paint	
Control of opacity	



Touch Up

Paint bottle - fillable 20ml

Description

- Plastic based paint bottle with
- a brush
- Including mixing ball made of stainless steel

Area of application

- Can be filled with paint
- Repairing of stone chips and scratches in the surface

Benefits

Unbreakable

ArtNo.	Specification	SP	MOQ
150.764	transparent / 20 ml × 100 pcs.	1	1

Touch Up

Paint bottle - fillable 50ml

Description

- Plastic based paint bottle with a brush
- Including mixing ball made of glass

Area of application

- Can be filled with paintRepairing of stone chips and scratches in the surface

Benefits

Unbreakable

ArtNo.	Specification	SP	MOQ
150.769	transparent / 50 ml × 25 pcs.	1	1

Magnetic Gun Holder

Paint gun holder

Description

Magnetic paint gun holder

Area of application

- Holder for paint guns
- Can be fixed on ferromagnetic metallic surfaces



ArtNo.	Specification	SP	MOQ
140.145	Magnetic Gun Holder	1	5

PG-FG Feinfilter

Fine filter

Description

■ Fine filter

Area of application

■ Paint filters for use in SATA gravity flow cup

ArtNo.	Specification	SP	MOQ
138.680	bag with 10 pcs.	10	10

Dust Needle

Dust needle

Description

- Dust needleContent: 10 pcs. ■ Inclusive holder

Area of application

■ For removing particles or lints from resh painted surfaces



ArtNo.	Specification	SP	MOQ
140.971	Set	1	10
140.972	needles in blister / 10 pcs.	10	5000

Brush Set

Set of brushes

Description

- Set of small brushes
- Content: 3 sizes /
- 12 pcs. per size No. 4 / No. 6 / No. 8

Area of application

For repairing imperfections, stone chips etc.

For industrial and professional use only.

ı	ArtNo.	Specification	SP	MOQ
	140.970	Set	1	10

Paint Arrestor

Paint mist separator

Description

- Paint mist separatorGlass fibre basis with
- elastic fibre structure
- Temperature resistant up to 100°C

Area of application

- Paint filter for paint booths
- Separation of paint mist

ArtNo.	Specification	SP	MOQ
142.891	500 mm × 20 m 3"	1	1
142.894	500 mm × 91 m 3"	1	1
142.898	660 mm × 20 m 3"	1	1
142.901	760 mm × 20 m 3"	1	1
142.902	760 mm × 25 m 3"	1	1
142.903	760 mm × 91 m 3"	1	1
142.906	860 mm × 91 m 3"	1	1
142.910	1000 mm × 20 m 3"	1	1
142.911	1000 mm × 25 m 3"	1	1
142.912	1000 mm × 50 m 3"	1	1
142.913	1000 mm × 91 m 3"	1	1
142.917	1250 mm × 91 m 3"	1	1
142.919	1530 mm × 25 m 3"	1	1







Micro Tip

Repair tip

Description

Micro repair sticks with a felt head

Area of application

For filling stone chips, silicone inclusions and scratches

Application advice

■ Perfectly suitable with the UV Clear

ArtNo.	Specification	SP	MOQ
140.976	box with 100 pcs.	1	1

Air hose

Air hose coil

Description

- Antistatic rubber air hose

- Antistatic rubber air nose
 Size: 9 x 16 mm
 Lentgh: 50 m
 Max. Air pressure: 12 bar
 Inner tube: Smooth EPDM black
 Outer tube: Smooth EPDM blue

Area of application

Air supply for spray guns and air driven tools

ArtNo.	Specification	SP	MOQ
143.131	9 × 16 mm / 50 m length	50	50

Air hose

Air hose complete

Description

- Antistatic rubber air hose incl.
- nipple and safety coupling

 Size: 9 × 16 mm
- Lentgh: 12,5 m
- Max. air pressure: 12 bar
 Inner tube: Smooth EPDM black
- Outer tube: Smooth EPDM blue

Area of application

Air supply for spray guns

ArtNo.	Specification	SP	MOQ
139.039	9×16 mm / 12,5 m length	1	1

Safety Coupling

Safety coupling with quick connector

Description

Air savety coupling for quick connectors



MS Coupling

MS Coupling

Description

■ MS Coupling



ArtNo.	Specification	SP	MOQ
143.128	Ø 6 mm	1	1
143.127	Ø 9 mm	1	1

Specification

Ø 6 mm

Ø9mm

ArtNo.	Specification	SP	MOQ
139.036	Ø 9 mm	1	1

Nippel

Nipple for quick connector

Description

Air connection nipple for quick connectors

Art.-No.

143.130

143.129



MOQ

10

Descri	otio	n		

Nipple with inner thread

Nippel

Air supply nipple with inner tread



ArtNo.	Specification	SP	MOQ
139.034	1/4 "	1	10

Nippel

Nipple with outer thread

Description

Air supply nipple with conic, outer thread

Teflon coated



ArtNo.	Specification	SP	MOQ
139.033	1/4 "	1	10

FINISH QUADRA PAD C-WAX C-80
POLISH-FINE STEP 2 POLISH C-30 FINISH
LAMBSWOOL RUPES POLISHING MACHINE
POLISH C-10 STRONG MICRO FIBER CLOTH

PAINT FINISH

POLISH C-05 CUT REFINISH POLISH FOAM
FINISH CONTROL FOAM C-99
FINISH WAFFLE FOAM FINISH BACK PAD
NANO CARNAUBA WAX POLISH C-07 CUT
POLISH-COARSE STEP 1 POLISH WAFFLE FOAM
FINISH FOAM



OUR RECOMMENDATION FOR A PERFECT POLISHINGSYSTEM

SYSTEM #1

Our **POLISHING SYSTEM #1** provides an extremely strong and aggressive first polishing step with our Polish C-05 Cut to directly remove imperfections and sanded areas on fresh and old paint surfaces.

Our Polish C-30 Finish presents an easy to use second polishing step to remove small scratches and holograms

step using our Wax Puck or our microfiber towels

C-Wax C-80 gives a strong protection, additional gloss and extremely smooth surface with lotus effect.

STEP 1

156.345 - Polish C-05 Cut

157.051 - Polish Foam Green

156.588 - Microfiber Wave Cut

We recommend the Polish C-05 cut and the Polish Foam Green for fresh and old paint.

The Polish C-05 Cut is an extra strong, high performance compound and provides an extremely fast removal of imperfections, deep scratches and sanded areas.

The Polish C-05 Cut cut is our most aggressive / fastest compound and has a pasty appearance.

On light colors like white or silver the Polish C-05 Cut cut works as a 1-step-compound, a second polishing step is not necessary.

STEP 2

151.636 - Polish C-30 Finish

151.639 - Finish Sandwich Pad C-30

156.589 - Microfiber 2/N1

We recommend our Polish C-30 Finish and in connection with the Finish Sandwich Pad C-30 for any painted surface. The Polish

C-30 Finish is a very fine anti-hologram compound and provides an easy and safe removal of fine scratches and holograms. Our Polish C-30 Finish achieves a smooth surface that deep gloss.

We recommend our Polish C-30 Finish + Finish Sandwich Pad C-30 on all dark colors or scratch/hologram sensitive colors.

STEP 3 optional

158.234 - C-Wax C-80 152.565 - Wax Puck

156.591 - Microfiber Polish Extreme

Our CS C-Wax C-80 suits for all painted and glossy surfaces

This high gloss sealant protects the surface against weather influences, fingerprints and water stains.

The CS C-Wax C-80 provides an extreme smooth surface. increases the gloss level and a long-lasting roll off effect.

Our CS C-Wax C-80 is an optional use after all polishing work.

SYSTEM #2

Our **POLISHING SYSTEM #2** provides a strong and aggressive first polishing step with our Polish C-07 Cut

Our Polish C-30 Finish presents an easy to use second

step using our Wax Puck or our microfiber towels

C-Wax C-80 gives a strong protection, additional gloss and an extremely smooth surface with lotus effect.

STEP 1

157.445 - Polish C-07 Cut

157.057 - Polish Foam Yellow

157.059 - Polish Waffle Foam Yellow

156.587 - Microfiber Sky Blue

Our Polish C-07 Cut and Polishing Foam Yellow is suitable for very fresh, old and sensitive paint.

The Polish C-07 Cut is a strong high performance compound and provides a fast removal of scratches and sanded areas in combination with our Polish Foam Yellow.

The Polish C-07 Cut is more liquid compare to the Polish C-05 Cut and is suitable for long lasting polishing sessions.

On light colors like white or silver, the Polish C-07 Cut cut works as a 1-step-compound, a second polishing step is not necessary.

STEP 2

151,636 - Polish C-30 Finish

157.067 - Finish Waffle Foam Black AH

157.065 - Finish Foam Black AH

156.590 - Microfiber Fluffy

We recommend our Polish C-30 Finish and

in connection with the Finish Waffle Foam Black

AH or Finish Foam Black AH for any painted surface. The Polish C-30 Finish is a very fine anti-hologram compound and provides an easy and safe removal of fine scratches and holograms. Our Polish C-30 Finish presents a smooth surface that deep gloss.

We recommend our Polish C-30 Finish + Finish Waffle Foam Black AH or Finish Foam Black AH on all dark colors or scratch / hologram sensitive colors

STEP 3 optional

158.234 - C-Wax C-80

152.565 - Wax Puck

156.591 - Microfiber Polish Extreme

Our CS C-Wax C-80 suits for all painted and glossy surfaces.

This high gloss sealant protects the surface against weather influences, fingerprints and water stains.

The CS C-Wax C-80 provides an extreme smooth surface, increases the gloss level and a long-lasting roll off effect.

Our CS C-Wax C-80 is an optional use after all polishing work.

SYSTEM #3

Our **POLISHING SYSTEM #3** provides a fast and aggressive first polishing step with our Polish C-10 Strong to remove imperfections and sanded areas on very fresh and old paint surfaces.

Our Polish C-30 Finish presents an easy to use second polishing step to remove small scratches and holograms

step using our Wax Puck or our microfiber towels

C-Wax C-80 gives a strong protection, additional gloss and an extremely smooth surface with lotus effect.

STEP 1

151.634 - Polish C-10 Strong 151.640 - Finish Quadra Pad C-10

156.588 - Microfiber Wave Cut

Our Polish C-10 Strong and Finish Quadra Pad C-10 is suitable for very fresh paint.

The Polish C-10 Strong is a durable high performance compound and provides a fast removal of scratches and sanded areas with our Finish Quadra Pad C-10.

Our Polish C-10 Strong is very liquid and suitable for long lasting and gentle polishing sessions.

On light colors like white or silver the Polish C-10 Strong works as a 1-step-compound, a second polishing step is not necessary.

STEP 2

151.636 - Polish C-30 Finish

157.053 - Finish Foam White AH

For industrial and professional use only.

151.639 - Finish Sandwich Pad C-30

156.589 - Microfiber 2IN1

We recommend our Polish C-30 Finish and in connection with the Finish Foam White AH or Finish Sandwich Pad C-30 for any painted surface. The Polish C-30 Finish is a very fine anti-hologram compound and provides an easy and safe removal of fine scratches and holograms. Our Polish C-30 Finish presents a smooth surface that deep gloss.

We recommend our Polish C-30 Finish + Finish Foam White AH or Finish Sandwich Pad C-30 on all dark colors or scratch / hologram sensitive colors.

STEP 3 optional

158.234 - C-Wax C-80

152.565 - Wax Puck

156.591 - Microfiber Polish Extreme

Our CS C-Wax C-80 suits for all painted and glossy surfaces.

This high gloss sealant protects the surface against weather influences, fingerprints and water stains.

The CS C-Wax C-80 provides an extreme smooth surface, increases the gloss level and a long-lasting roll off effect.

Our CS C-Wax C-80 is an optional use after all polishing work.

PRODUCTCATALOGUE 2022 | CARSYSTEM





Polish C-05 cut

High performance grinding polish



Description

- High performance grinding polish
- Free of silicones

Area of application

- Extremely fast removal of defects on fresh and completely hardened top coats
- Especially developed for fresh and used paint surfaces

Benefits

- Extremely high grinding performanceGood deep shine

Application advice

- We recommend using the Carsystem Polish Foam Green
- We recommend using the Carsystem C-30 subsequently on dark paints

ArtNo.	Specification	SP	MOQ
156.345	green / 1 kg	1	6

Polish C-07 cut

High performance grinding polish



Description

- High-performance grinding polish
- Water-basedFree of silicones

Area of application

- Very fast removal of defects on fresh and completely hardened top coats
 Especially developed for fresh and used paint surfaces

- Very high grinding performanceVery good deep shine

■ We recommend using the Carsystem Polish Foam Yellow

ArtNo.	Specification	SP	MOQ
157.445	yellow / 1 kg	1	6

Polish C-10 strong

High performance grinding polish



Description

- High performance grinding polish
- Free of silicones

Area of application

- Fast removal of imperfections in fresh and completely hardened top coats
- Especially developed for fresh and used paint surfaces

Benefits

- High grinding performance
- Extremely good deep shinePolishing on a low temperature level

Application advice

■ We recommend using of Carsystem Finish Quadra Pad C10

ArtNo.	Specification	SP	MOQ
151.634	white / 1 kg	1	6

Polish C-30 finish

Anti hologram polish



Description

- Anti hologram polish
- Water-based
- Free of silicone

Area of application

- Removal of finest scratches, swirl marks and holograms on dark paints Perfekt the last finishing step

Benefits

- Very effective removal of holograms without streaksPerfect deep shine

- Low dustingGood material displacement

Application advice

We recommend the using with Carsystem Finish Foam White AH, Finish Sandwich Pad C-30 or Finish Foam Black AH

ArtNo.	Specification	SP	MOQ
151.636	grey / 1 kg	1	6

PAINT FINISH



C-Wax C-80 High gloss finish sealer



■ Water-based high gloss finish sealer

Area of application

- Sealing of painted surfaces
 Protects the paint from weathering, fingerprints and slight mechanical damage
 Perfectly suitable as assembly protection in

- industry or car dealerships

 Can be applied by hand or machine

Benefits

- Very good resistance to alkaline cleaners and environmental influences
 Extremely smooth surface

- Long-lasting protection
 Brilliant deep shine
 Very quick and easy to use

Application advice

■ We recommend using the Carsystem Wax Puck

ArtNo.	Specification	SP	MOQ
158.243	500 g	1	10

Finish Control Foam C-99

Control Foam



Description

- Micro Foam-Spray
- Water-based
 Free of silicones

Area of application

For checking and cleaning between the polishing steps

Benefits

- Removes oily and waxy residuesMakes any remaining sanding marks visible

Application advice

Finish Control Foam C-99 should be removed with a microfiber cloth after a short exposure time.

ArtNo.	Specification	SP	MOQ
156.614	white / 400 ml	1	12



- High gloss wax with nano technology

Area of application

- Sealing of paint surfaces
- Protects the paint from weathering

Benefits

- Dirt repellent
- Provides a deep, mirror-like shine

Application advice

■ We recommend the application with the Carsystem Wax Puck

ArtNo.	Specification	SP	MOQ
151.945	yellow / 1,0 l	1	6

Refinish 1

Grinding polish

- Area of application



ArtNo.	Specification	SP	MOQ
132.437	880 ml	1	12

Refinish Restorer

Plastic conditioner



- Plastic conditionerAir drying natural oilFree of silicones
- Area of application

For refurbishing faded plastic and metallic surfaces (e.g. aluminum, chrome, stainless steel, non ferrous metals)

■ For removeing polishing splashes from plastics

Benefits

■ Infiltrates deep into surfaces

Application advice

Only for exterior use. The product shall be testet first before application on white surfaces

ArtNo.	Specification	SP	MOQ
151.070	yellowish-transparent / 250 ml	1	12
151.071	yellowish-transparent / 1,0 I	1	6

Polish-coarse step 1



Description

- High performance cutting compoundWater-based
- Free of silicone

Area of application

- Fast removal of imperfections in fresh top coats
- For industrial and detailling sector
 Focusses on a one step process

Benefits

- High grinding performanceVery good deep shine
- Polishing on a low temperature level
 Wall dispenser available

Application advice

■ We recommend using the Carsystem Lambwool Pad white S / Edge or Polish Foam Yellow

ArtNo.	Specification	SP	MOQ
156.451	Polish Step 1 coarse / 5 kg	1	4

Polish-fine step 2

Anti-hologram polish



Description

- Anti-hologram polish
- Water-based
 Free of silicone

Area of application

- Removal the finest scratches, squirl marks and holograms in dark paint
 Perfekt as last finishing step after Polish Step 1

Benefits

- Very effective removal of holograms without streaks
 Perfect deep shine
- Low dusting
- Good material displacement
- Wall dispenser available

Application advice

■ We recommend using the Carsystem Finish Waffle Foam Black

ArtNo.	Specification	SP	MOQ
156.452	Polish Step 2 fine / 5 kg	1	4

PRODUCTCATALOGUE 2022 | CARSYSTEM >

PAINT FINISH

REFINISH

Dispenser for 5 kg Polish

Dispenser

Description

Milking dispenser for 5 kg polishes



ArtNo.	Specification	SP	MOQ
156.460	Dispenser for 5 kg polish	1	1

Wall Bracket for 5 kg Polish

Wall Bracket

Description

■ Wall bracket for 5 kg polishes



ArtNo.	Specification	SP	MOQ
156.461	Wall Bracket for 5 kg Polish	1	1

ArtNo.	Specification	SP	MOQ
156.461	Wall Bracket for 5 kg Polish	1	1

Dispenser bottle incl. Cap

Dispenser bottle

Description

- Dispenser bottle incl.
- cap for polishes

Benefits

- Perfect dosage of the amount
- of polish compound

 Low weight

 Perfect handling



ArtNo.	Specification	SP	MOQ
156.575	Dispenser bottle incl. cap	1	1

Rupes 9. Holder BigFoot

Wall racket

Description

Wall racket for BigFoot polishing machines
 Dimensions: 32 cm × 20,5 cm

Area of application

Functional wall racket of BigFoot polishing machines

Benefits

- Special hooks for holding up to 9 m of power cable
 Rounded corners and edges to protect user and machine



ArtNo.	Specification	SP	MOQ
158.134	black / 32 × 20.5 cm	1	1

RUPES 47.105 Replacement carbon brush

Replacement carbon brush

Description

- Original RUPES replacement carbon brushes for the following RUPES polishing machines: RUPES LHR21ES
- RUPES LH16ESRUPES LH19E/STD
- RUPES LHR15III/STDRUPES LHR75E/STD
- 10 pcs pack

1	-	
	SPECIAL SPACE	
	-	

ArtNo.	Specification	SP	MOQ
158.290	10 pcs pack	1	1

Finish Back Pad

Finish back pad

Description

- Finish back pad for polishing pads

 Thread: M14



ArtNo.	Specification	SP	MOQ
139.206	128 mm	1	10
139.207	73 mm	1	10

Finish Back Pad M-14

Finish back pad



Description

- Finish Back Pad for polishing pads with Velcro®
- Extra thick foam pad
 Degree of hardness: Soft
 Thread: M-14

Benefits

- Adapts perfectly to uneven surfaces
 Distributes the press on the surface more evenly

ArtNo.	Specification	SP	MOQ
157.721	123 mm	1	1



PAINT FINISH



- Electric angle polishing machine
- Rotating
 Max. Velcro® back pad: 200 mm
 Adjustable speed up to 1.700 rpm.
 Thread: M14-M

ArtNo.	Specification	SP	MOQ
157.321	LH16ES	1	1

RUPES Polishing Machine LH19E

Polishing machine, Bigfoot



Description

- Electric Polishing machine
- Rotating

 Ø Velcro® back pad: 125 165 mm

 Adjustable speed up to 1.700 rpm.

 Thread: M14

ArtNo.	Specification	SP	MOQ
157.322	LH19E	1	1
157.640	polishing back pad M14	1	1

RUPES Polishing Machine LHR15

Polishing machine, electric, Bigfoot



Description

- Electric Random Orbital Polishing machine
- 15 mm orbit diameter
 Velcro® back pad: 125 mm
- Adjustable speed up to 5.200 rpm.
 Thread: M8-F

ArtNo.	Specification	SP	MOQ
157.323	LHR15 III	1	1
157.641	polishing back pad 125 mm	1	1

RUPES Angle Polishing Machine LH76P

Angle polishing machine, pneumatic



Description

- Pneumatic Polishing Machine
 Velcro® back pad: 75 mm
 Adjustable speed up to 5.000 rpm.
 Thread: 3/8"

ArtNo.	Specification	SP	MOQ
157.331	LH76P	1	1

RUPES Polishing Machine LHR75

Polishing machine, pneumatic



Description

- Pneumatic Mini Random Orbital Polishing Machine

- 15 mm orbit diameter
 Ø Velcro® back pad: 75 mm
 Adjustable speed up to 11.000 rpm.

ArtNo.	Specification	SP	MOQ
157.332	LHR75	1	1
157.642	polishing back pad M6 / 75 mm	1	1

RUPES Polishing Machine LHR75E

Polishing machine Bigfoot, electric



Description

- Electric Mini Random Orbital Polishing Machine
- Orbital12 mm orbital diameter
- Backing pad: 75 mmConnection: M6
- Speed adjustable up to 5.500 U/min.
- Thread: M6 receptacle

ArtNo.	Specification	SP	MOQ
157.340	LHR75E / 75 mm	1	1

- Pneumatic polishing machine
- Incl. back pad
 Adjustable speed up to 2.500 rpm.
- Thread: 1/4 inch



Polishing Back Pad

Finish back pad

Description

- Replacement back pad for Polishing Machine RC166
- Thread: M6 (fixed screw)



ArtNo.	Specification	SP	MOQ
143.723	Mini Polishing Machine RC 166 incl. polishing back pad	1	1

ArtNo.	Specification	SP	MOQ
144.916	M6 / 77 mm	1	1

Polish Foam White SC

Polishing pad

Description

Polish foam pad





For processing of grinding polishes

Application advice

■ We recommends using the Polish Foam White SC in combination with all common abrasive polishes

ArtNo.	Specification	SP	MOQ
157.054	85 mm	2	200
157.055	145 mm	2	100

Polish Foam Green

Polishing pad







Area of application

■ For processing of grinding polishes

Application advice

■ We recommends using the Polish Foam Green with the Carsystem Polish C-05 Cut

ArtNo.	Specification	SP	MOQ
157.050	85 mm	2	200
157.051	145 mm	2	100

Polish Foam Yellow

Polishing pad

Description

Polish foam padHardness: medium



For processing of grinding polishes

Application advice

■ We recommends using the Polish Foam Yellow with the Carsystem Polish C-07 Cut

ArtNo.	Specification	SP	MOQ
157.056	85 mm	2	200
157.057	145 mm	2	100

Polish Waffle Foam Yellow

Polishing pad

Description

- Polish Waffle Foam
- Hardness: medium

Area of application

For processing of grinding polishes

Application advice

We recommends using the Polish Foam Yellow with the Carsystem Polish C-07 Cut

ArtNo.	Specification	SP	MOQ
157.058	85 mm	2	200
157.059	145 mm	2	100

Finish Quadra Pad C10

Polishing pad

Description

- Finish foam pad ■ Hardness: hard
- Cross cut
 Double layer construction

Area of application

■ For processing of grinding polishes

Benefits

- Double layer construction supports the foam
- and provides a consistent performance

 Spider cut for more aggressivity

Application advice

■ We recommend using the Carsystem Polish C-10 strong

ArtNo.	Specification	SP	MOQ
151.906	85 mm	4	4
151.640	145 mm	1	1
151.905	160 mm	1	1

Finish Sandwich Pad C30

Polishing pad

Description Finish foam pad

■ Hardness: Medium

■ Double layer construction

Area of application ■ For processing of fine and anti-hologram polishes

Benefits

■ Double layer construction supports the foam and provides a consistent performance

Application advice

■ We recommend using the Carsystem Polish C-30 finish

ArtNo.	Specification	SP	MOQ
151.908	85 mm	4	4
151.639	145 mm	1	1



Description

- Finish Foam Pad
- Hardness: soft

Area of application

■ For processing of fine & anti-hologram-polishes and waxes

Application advice

■ We recommends using the Polish Foam White AH with the Carsystem Polish C-30 Finish

ArtNo.	Specification	SP	MOQ
157.052	85 mm	2	200
157.053	145 mm	2	100

Finish Foam Black AH

Polishing pad

Description

Finish Foam Pad

■ Hardness: Soft Area of application

■ For processing of fine & anti-hologram-polishes and waxes

Application advice

■ We recommends using the Finish Foam Black AH in combination with all common fine & anti-hologram-polishes and waxes

ArtNo.	Specification	SP	MOQ
157.064	85 mm	2	200
157.065	145 mm	2	100

Finish Waffle Foam Black AH polishing pad

- Description Finish Waffle Foam
- Hardness: Soft

Area of application

■ For processing of fine & anti-hologram-polishes and waxes

Application advice

■ We recommends using the Finish Foam Black AH in combination with all common fine & anti-hologram-polishes and waxes

ArtNo.	Specification	SP	MOQ
157.066	85 mm	2	200
157.067	145 mm	2	100

Finish Foam orange

Polishing pad



Polish foam pad ■ Hardness: Medium

Area of application

■ For processing of grinding polishes

ArtNo.	Specification	SP	MOQ
153.088	85 × 25 mm	2	100
153.076	145 × 25 mm	1	100

Finish Waffle Pad orange

Polishing pad

Description

■ Polish waffle foam pad ■ Hardness: Medium

Area of application

For processing of grinding polishes

Benefits

■ Waffle form reduces the temperature level

ArtNo.	Specification	SP	MOQ
153.114	135 × 25 mm	2	100

Car Mop white

Polishing pad

Description

- Polish foam pad
- Hardness: Hard

Area of application

For processing of grinding polishes

Application advice

■ We recommend using the Car Mop white with Refinish 1

ArtNo.	Specification	SP	моо	
133.149	150 × 50 mm	1	10	

Car Mop yellow

Polishing pad

Description Finish foam pad

■ Hardness: Ultra soft

Area of application

For processing of fine and anti-hologram polishes

Provides very high gloss especially on dark coloursHighly flexible

ArtNo.	Specification	SP	MOQ
137.798	75 × 20 mm	6	60

Lammfell White S

Lambswool Pad

Description

■ 100% Lambswool

■ Soft backpad

Area of application

For processing of grinding polishes

■ Highest quality offers extremely long durability

Polishing on a low temperature level
 High cutting power for an efficient removal of sanding marks

ArtNo.	Specification	SP	MOQ
157.159	80 × 17 mm	1	10
157.629	130 × 21 mm	1	10





Lammfell White S Edge

Lambswool Pad



Description

- 100% Premium lambswool
- Protective armour due to turned-in edge
 The turned-in edge forms an edging on the backside which fixes the backpad perfectly

Area of application

Designed for polishing strong curves, narrow edges and hard-to-reach areas, e. g. entrance areas, window frames, roof pillars

Benefits

- Protects surrounding parts from damage

- Easy polishing also in hard-to-reach areas
 Very fast removal of scratches
 Highest quality offers extremely long durability

ArtNo.	Specification	SP	MOQ
157.232	130 × 25 mm	1	10
157.163	80 × 17 mm	1	10

Lambswool Pad gold S

Lambswool pad

Description

- = 100% lambswool = Soft backpad

Area of application

■ For processing of grinding polishes

Benefits

- Highest quality offers extremely long durability
- Polishing on a low temperature level
 Very high cutting power for an efficient removal of sanding marks

ArtNo.	Specification	SP	MOQ
157.166	80 × 17 mm	1	10
157.290	150 × 17 mm	1	10

Wax Puck

Application foam

Description

■ Polyurethane foam



Effective application of polishes and waxes

Benefits

■ Ergonomic handle

ArtNo.	Specification	SP	MOQ	
152.565	128 – 130 mm	1	1	

Car Polish Roll

Disposable polishing cloth

Description

- Disposable polishing clothDispenser with 370 tear-offs
- Perforated
 Size: 36 × 40 cm

Area of application Cleaning and degreasing of surfaces

Benefits

- Extremely soft
- Free of lintsTear resistant
- Highly absorbent



Car Pad black

Finish Back Pad

- Description Finish back pad for 75 mm
- polishing pads

 Velcro®

 Bolt: 6 mm



ArtNo.	Specification	SP	MOQ
133.147	black / 75 mm	1	10

CARSYSTEM PRODUCT CATALOGUE 2022 PRODUCTCATALOGUE 2022 | CARSYSTEM > For industrial and professional use only. For industrial and professional use only.



Micro fiber cloth

Sky Blue

Description

- Micro fiber cloth 40 × 40 cm
- = 260 g/m² = 80 % polyester / 20 % polyamide = With ultrasonic cut

Area of application

■ For all common cleaning works

Benefits

■ The edges do not scratch

Application advice

■ Washable up to 30°C no detergents

ArtNo.	Specification	SP	MOQ
156.587	260 g/m² / 40 × 40 cm	5	360

Micro fiber cloth

Wave Cut

Description

- Micro fiber cloth 40 × 40 cm
- = 300 g/m² = 80 % polyester / 20 % polyamide = With ultrasonic cut

Area of application

- Perfect for sharp edged panels
- For all common cleaning works

Benefits

- Universal micro fiber cloth The edges do not scratch
- Application advice

■ Washable up to 30°C no detergents

ArtNo.	Specification	SP	MOQ
156.588	$300 \text{ g/m}^2 / 40 \times 40 \text{ cm}$	5	300





Micro fiber cloth

2 IN 1

Description

- Micro fiber cloth 40 × 40 cm
 380 g/m²

- 80 % polyester / 20 % polyamide
 With ultrasonic cut

Area of application

■ For all common cleaning works

Benefits

- Two different sides (short fibres / long fibres)
- Flexible useThe edges do not scratch

Application advice

■ Washable up to 30°C no detergents

ArtNo.	Specification	SP	MOQ
156.589	$380 \text{ g/m}^2 / 40 \times 40 \text{ cm}$	3	240

Micro fiber cloth

Fluffy

Description

- Micro fiber cloth 40 × 40 cm
- = 500 g/m² = 80 % polyester / 20 % polyamide = With ultrasonic cut

Area of application

- High absorption of polishes, waxes and dust
 "Final cloth", extremely gentle on the surface

Benefits

- Very long and soft fibresPerfect absorption
- The edges do not scratch

Application advice

■ Washable up to 30°C no detergents

ArtNo.	Specification	SP	MOQ
156.590	500 g/m² / 40 × 40 cm	2	180



Micro fiber cloth

Polish Extreme

Description

- Micro fiber cloth 40 × 40 cm
- 800 g/m²
 80 % polyester / 20 % polyamide
- Corded edges

Area of application

- Polishing cloth
- High absorption of polishes and waxes

Benefits

- Extremely high absorptionVery gentle on the surfaceThe edges do not scratch

Application advice

■ Washable up to 30°C no detergents

ArtNo.	Specification	SP	MOQ
156.591	$800 \text{ g/m}^2 / 40 \times 40 \text{ cm}$	1	100







PAINT FINISH



UNIFLEX PU

Bonding and sealing compound

Description

- Bonding and sealing compound
- Polyurethane

Area of application

Elastic bonding of GRP and metal

Sealing of seams, joints and fittings

- Benefits
- Fast dryingHigh UV resistance (no discoloration)
- Overpaintable



ArtNo.	Specification	SP	MOQ
148.923	white / 310 ml	1	12
148.925	grey / 310 ml	1	12
148.924	black / 310 ml	1	12

UNIFLEX MS

Sprayable seam sealer

Description

■ Spray- and brushable seam sealer ■ Poly-oxy-propylene (POP) copolymer

Area of application

Seam sealing for overlapping panels and welded seams in original structure e.g. vehicle and carbody repair, container construction, metal construction, ventilation engineering and air-condition technology

Benefits

- Fast drying
- Stone chip protection

Application advice

Keep UNIFLEX-MS away from fresh, not finally hardened PU material

ArtNo.	Specification	SP	MOQ
135.119	beige / 310 ml	1	12
148.926	grey / 290 ml	1	12
135.706	black / 310 ml	1	12

UNIFLEX Glas

Glass bonding glue

Description

- Glass bonding glue
- 1K Polyurethane
- FMVSS 212 tested

Area of application

For glueing front, side and rear windows

Application advice

Art.-No.

148.927

- Holding time: 2 hours (23°C and 50 % rel. humidity) for cars with driver and co-driver airbags.
- Processing temperature: 5°C to 40°C



MOQ

12

1

UNIFLEX Glas HM

Glass bonding glue - High modulus - non-conductive

Description

- Glass bonding glue
- 1K Polyurethane
- High modulus and non-conductive
 FMVSS 208/212 Test
- Area of application

■ For glueing front, side and rear windows

Benefits

- High modulus glue (high stiffness)
 Applicable for vehicles with integrated antenna

Application advice

- Holding time: 30 min (23°C and 50 % rel. humidity) for cars with driver and co-driver airbags
- Processing temperature: 5°C to 40°C

ArtNo.	Specification	SP	MOQ
1/18 028	black / 310 ml	- 1	12

For industrial and professional use only.

-

GLAS HM

UNIFLEX Glas Fast-Cleaner

Specification

clear / 30 ml

Glass cleaner + activator

Description

Glass cleaner and activator

Area of application

- Application for a perfectly clean surface ■ Surface cleaner for Carsystem Uniflex Glas
- and Glas HM

Application advice

Art.-No.

144.035

- Application with a lint-free cloth
- Drying time: 1 2 min.
- Close bottle immediately after use (sensitive to moisture)



SP

1

MOQ

25

Description

UNIFLEX Glas Fast-Primer

Moisture curing glass primer

■ Moisture curing glass-primer

Area of application

- Primer for Carsystem Uniflex Glas and Glas HM
- Provides adhesion between glass and glass bonding glue

 Application on the ceramic zone of the window

Application advice

- To use only in combination with Carsystem Uniflex Glas Fast-Cleaner Surface must be clean, dry, dust and grease-free
- Glas Fast-Primer application only after surface treatment
- with the Carsystem Uniflex Glas Fast-Cleaner

 Shake bottle well before use
- Drying time: 15 min

ArtNo.	Specification	SP	MOQ
144.036	black / 30 ml	- 1	25

Applicator

Applicator

Description

Special applicator tool for liquid primers

Area of application

For the application of Carsystem UNIFLEX Glas Fast-Primer



ı	ArtNo.	Specification	SP	мос
	139.325	Applicator	1	100

UNIFLEX Nozzle

Spare nozzles

Description

 Spare nozzles for Carsystem Uniflex cartridges

Area of application

- Spare nozzles for Carsystem UNIFLEX cartridges
- Fits only for cartridges



ArtNo.	Specification	SP	MOQ
150.292	Nozzles for UNIFLEX PU	12	12
155.241	Nozzles for UNIFLEX MS	12	12

Specification

black / 310 ml

UNIFLEX Adapter Nozzle

Wing tip

Description

- Nozzle for seam sealingWing tip

Area of application

- Seam sealing on folded edgesFits only for cartridges



ı	ArtNo.	Specification	SP	MOQ
	149.009	bag of 10	1	1

UNIFLEX Adapter Nozzle

Description

Nozzle for seam sealing"V-form" nozzle

Area of application

- For an even sealing of folded edgesFits only for cartridges



ArtNo.	Specification	SP	MOQ
149.010	V-nozzle / bag of 10	1	1

UNIFLEX Air Gun

Air gun



Description

Cartridge air gun for the extrusion of 1K sealing compounds

Area of application

- For extruding of seam sealer
 For 290 ml / 310 ml cartridges and aluminum bags up to 400 ml
 For processing with Uniflex cartridges (PU, MS, Glas, Glas HM)

ArtNo.	Specification	SP	MOQ
153.224	Uniflex Air Gun	1	1

UNIFLEX Gun

Manual gun



Description

■ Manual gun for the extrusion of 1K sealing compounds

Area of application

- For processing of Carsystem Uniflex cartridges (PU, MS, Glas, Glas HM)
 Classic: for 290 ml / 310 ml cartridges
 Top: for 290 ml / 310 ml cartridges and aluminum bags up to 400 ml

ArtNo.	Specification	SP	MOQ
135.108	Classic for 310 ml	1	1
139.286	Top for 290 – 400 ml	1	1

MS Air Gun

MS spray gun



Description

Pneumatic cartridge gun for the extrusion and spraying of 1K sealing compounds

Area of application

- Spraying and extruding of 1K sealing materials
 For 290 ml / 310 ml cartridges and aluminum bags up to 400 ml

For processing of Uniflex cartridges (PU	, MS, Glas, Glas HM)
--	----------------------

ArtNo.	Specification	SP	MOQ
125.681	MS Air Gun	1	1
131.563	spare nozzle set	1	1

Mount Tape

Double sided adhesive tape

Description

- Double sided tape
- Temperature resistance: -40°C to +120°C
- Black adhesive tape
- Based on polyethylene
- Modified acrylate glue

Area of application

- Usable for permanent application with high shear and UV exposure, softeners and a wide temperature range (e. g. edge lining and emblems, side bumpers, mirror glass or counterbalance lead weights)
- Industrial mounting of signs or labels interior and exterior

Benefits

- High adhesive strength
- Very high UV resistance
- Good solvent resistance
- Flexible fixing also on bended surfaces

ArtNo.	Specification	SP	MOQ
125.712	9 mm × 10 m	2	20
125.713	12 mm × 10 m	2	20
125.720	19 mm × 10 m	1	10
125.725	25 mm × 10 m	1	10
125.726	50 mm × 5 m	1	60

HS-Acryl Tape

Double sided adhesive tape

Description

- Double sided tape
- Temperature resistance up to: -40°C to +150°C
- Grev adhesive tape
- Based on acryl ■ Acrylate glue

Area of application

- High performance tape for permanent application with extreme temperatures and humidity (e. g. edge linings and emblems, side bumpers, mirror glasses or counterbalance lead weights)
- Industrial mounting of signs or labels interior and exterior Suitable for metal, wood, glass and most common plastics

Benefits

- Extremely high initial adhesion and strengthHigh temperature and humidity resistance

ArtNo.	Specification	SP	MOQ
147.024	6 mm × 10 m	2	20
137.072	9 mm × 10 m	2	20
137.073	12 mm × 10 m	2	20
137.074	19 mm × 10 m	1	10
137.075	25 mm × 10 m	1	10

KS-50

Sealing compound - brushable

Description

- Brushable sealing compound
- Permanently elastic Based on synthetic rubber
- Temperature resistance: -25°C to 80°C

Area of application

Front and back apron, joints and trim pieces, inside the trunk and foot compartment. wheel cases etc.

Application advice

Overpaintable after application of an adhesion primer

ArtNo.	Specification	SP	MOQ
150.801	grey / 1 kg	1	12

KS-Brush

Nylon brush

3

1

KS-50



Area of application

For processing sealing compounds



ArtNo.	Specification	SP	MOQ
141.453	30 mm	1	70

KS-200

Cavity protection

Description

- Sprayable cavity protection
- Wax-like cavity protectionColour: Brown transparent ■ Melting point: 95°C

Area of application

■ For preserving all cavities of car bodies

Benefits

■ High creeping capacity also on hard-to-reach areas

Specification

brown transparent / 11

Rust protection Adhesion on metal

Application advice

Not overpaintable

Art.-No.

126.062



1

12

KS-300

Cavity wax

Description

- Sprayable cavity protection
- Wax-like cavity protection
- Colour: White transparent
 Melting point: 160°C

Area of application

For preserving all cavities of car bodies

Benefits

- Very high melting point
- Rust protection
- Adhesion on metal

Application advice

■ Not overpaintable



ArtNo.	Specification	SP	MOQ
155.650	white transparent / 11	1	12

KS-500

Underbody protection bitumen

Description

- Sprayable underbody protectionBased on bitumen

Area of application

■ Permanent underbody protection for car bodies

Benefits

- Vibration absorbing
- Anti-noise compound

Application advice

Not overpaintable



Specification SP MOQ 126.034 black / 11 12 132.483 black / 60 I 60 60

KS-100

Underbody protection bitumen

Description

- Brushable underbody protection
- Based on bitumen ■ Thixotropic bitumen-resin composite

Area of application

Underbody protection for car bodies

Application advice

Not overpaintable



ArtNo.	Specification	SP	MOQ
126.032	black / 1 l	1	12

KS-800

Underbody protection wax

Description

- Sprayable underbody protection wax
- Permanent rust protection based on wax

Area of application

Permanent underbody protection for car bodies

Benefits

■ High water displacement

Application advice

Not overpaintable



ArtNo.	Specification	SP	MOQ
126.095	black / 1 l	1	12

KS-1000

Stone chip protection

Description

- Sprayable stone chip and underbody protection
- Based on plastic rubber
- Free of asbestos

Area of application

- Underbody treatment for car bodies
- Stone chip protection for spoilers, sills and lower door areas

Benefits

- Vibration absorbing Anti-noise compound
- Also suitable for PVC substrates

Application advice

Overpaintable after application of an adhesion primer

ArtNo.	Specification	SP	MOQ
149.266	white / 1 I	1	12
149.264	grey / 1 I	1	12
149.265	black / 1 I	1	12

KS-1000

KS-3000

PLUS

KS-2100

Stone chip protection + seam sealer

Description

- Sprayable stone chip protection and seam sealer
- Rubber/resin basis

Area of application

- Stone chip protection
- Seam sealer for car bodies

Benefits

- Vibration absorbing
- Anti-noise compound Rust protection
- High shifts without paint run possible

Application advice

Overpaintable after application of an adhesion primer



KS-2100

ArtNo.	Specification	SP	MOQ
139.214	grey / 11	1	12
140.146	black / 1 l	1	12

KS-3000 Plus

HS stone chip protection

Description

- Sprayable stone chip and underbody protectionRubber/resin basis

Area of application

Stone chip and underbody protection for car bodies

Benefits

- Vibration absorbing
- Anti-noise compoundRust protection
- Very weather resistantVery high abrasion resistance

Application advice

- Overpaintable with water base paint without a primer
 Overpaintable with 2K or acrylic paints after

Suitable for oven d Very good sandable Variable structure			
ArtNo.	Specification	SP	MOQ
152.621	white / 1 I	1	12
152.804	grey / 1 I	1	12
152.622	black / 1 l	1	12

KS-4000

Stone chip protection water-based

Description

- Sprayable stone chip protection
- Water-based
- Free of solvents

Area of application

Sprayable stone chip protection and

Benefits

- Vibration absorbing
- Anti-noise compound
- Solvent resistant
- Very high abrasion resistance

Application advice

- Overpaintable after application of an adhesion primer
- Suitable for oven drying
 Very good sandable after final hardness

, g				a. a
Variable	structure	fine or	rough	possible

ArtNo.	Specification	SP	MOQ
134.374	black / 1 l	1	12

KS-Dual Gun

Underbody protection gun

Description

KS-4000

- Pneumatic underbody and
- cavity protection gun
 Including two sucction pipes
- Quick coupling

Area of application

Rust protection, underbody protection and cavity protection

Benefits

- Fast change of material possible
- Less gun cleaning



ArtNo.	Specification	SP	MOQ
126.040	incl. 2 additional suction pipes / without cavity protection tube	1	1
126.058	0.9 m / cavity protection tube	1	1
126.048	replacement suction pipes	1	1

KS-Gun

Underbody protection gun

Description

- Pneumatic pressure cup gun
- Structure aun
- Cup content: 1

Area of application Rust protection, underbody

- protection and cavity protection

 Processing of solvent- and
- water-based products

Benefits

Amount of air and material output adjustable

157.032

142.279

147.956

158.017

Various structures possible



KS-Gun nozzle

KS-250

Cavity protection ML

Description

- Cavity protection spray Wax like cavity protection
- Melting point: 160°C

Area of application For renewing or repairing of existing coatings

Benefits

- Very high melting pointDrip-free
- Rust protectionAdhesion on metal

Application advice

Not overpaintable

ArtNo.	Specification	SP	MOQ
126.061	brown-transparent /	1	12



CARSYSTEM PRODUCTCATALOGUE 2022 PRODUCTCATALOGUE 2022 | CARSYSTEM > For industrial and professional use only. For industrial and professional use only.



Specification

transparent / 500 ml

KS-400

Rust protection wax

Description

- Rust protection wax
- Liquid rust protection ■ Temperature resistance: -25°C to +160°C

Area of application

- Transparent conserving of rust exposed parts on car bodies

 Suitable to protect subareas of the engine
 Protects also hinges

Benefits

- Good water displacement
- Very temperature resistant

Application advice

Not overpaintable

Art.-No.

125.468



1

12

KS-550

Underbody protection bitumen

Description

Underbody protection spray Based on bitumen

Area of application

■ For renewing or repairing of existing underbody coatings

Benefits

■ No gun application necessary

Application advice

■ Not overpaintable



ArtNo.	Specification	SP	MOQ
126.029	black / 500 ml	1	12

KS-850

Underbody protection wax

Description

- Underbody protection wax sprayPermanent rust protection based on wax
- Temperature resistance: -25°C to +80°C

Area of application

For renewing or repairing of existing underbody coatings

Benefits

Good water displacement

Application advice Not overpaintable

Art.-No.

126.094



MOQ

1 12

KS-1050

Stone chip protection

Description

- Underbody protection spray
- Based on synthetic rubber
- Free of asbestos

Area of application

■ For renewing or repairing of existing stone chip protections

Benefits

- No gun application necessary
- Also suitable for PVC substrates

Application advice

Overpaintable after application of an adhesion primer



ArtNo.	Specification	SP	MOQ
126.022	grey / 500 ml	1	12
126.023	black / 500 ml	1	12

Power Mix

2K PU glue

Description

= 2K Polyurethane glue

Area of application

- Repair of plastic parts
- Suitable for metal, wood, stone,
- concrete or glass For wide area glueing and filling of cavities

Application advice

Art.-No.

144.498

144.500

144.499

144.501

- 25 ml cartridges manual dosage
- 50 ml cartridges for Power Mix gun
 We recommend the use of the adhesion

promoter 144.502 / Carsystem Power Mix Primer / Activator 150 ml

Specification

clear / 25 ml clear / 50 ml

black / 25 ml

black / 50 ml



2

2

Power Mixer

Mixing tube - 25 ml

Description

- Plastic mixing tubeColour: Green

Area of application

■ Mixing tube for Carsystem Power Mix 25 ml cartridges



ArtNo.	Specification	SP	MOQ
151.952	mixing tube / green	12	12

Power Mixer

Mixing tube - 50 ml

Description

- Plastic mixing tube
- Colour: Blue

Area of application

Mixing tube for Carsystem Power Mix 50 ml cartridges



MOQ

2

2

ArtNo.	Specification	SP	MOQ
140.926	mixing tube / blue	12	12

Power Mix Gun

2K PU-glue gun

Description

Application gun for plastic repairs

Area of application

 Application gun for Carsystem Power Mix 50 ml cartridges



ArtNo.	Specification	SP	MOQ
140.927	cartridge gun	1	1

Specification

brown / 500 ml



Power Mix Film

Backing and supporting film

Description

- Backing and supporting film
 Front side: With a supporting mesh
 Back side: Plain film, to be removed
- after curing Size: 12,5 × 150 cm

Area of application

- Plastic repair
 Supporting the plastic compound
 Usable with Carsystem 2K Power Mix PU compounds

Power Mix Primer

Primer + activator

Description

- Adhesion primer for plastic partsColour: Transparent

Area of application

Adhesion primer for glueing different plastic parts



ArtNo.	Specification	SP	MOQ
144.503	backing / supporting	1	1

ArtNo.	Specification	SP	MOQ
144.502	clear / 150 ml	1	1

Sound Deadening Panels

Sound deadening panels

Description

- Sound absorbing
- Self-adhesive

Area of application

For insulating sounds and vibrations



Steel Bond

Repair compound

Description


- 2K Repair and glue compound
 Based on solvent free epoxy resin
- High temperature resistance
 Colour: Grey metallic

Area of application

- For connecting the same or different types of material e. g. steel, aluminium, lead, wood, iron etc.
 For filling holes, funnels, cracks etc.
 Sealing and insulation material for permanent
- repairs especially in environments, where welding is not an option
- High chemical resistance against oil, gasoline and most of organic liquids

- Filling, sealing and glueing
 Very good mouldable
 Extremely durable after curing
 Low shrinkage

ArtNo.	Specification	SP	MOQ
150.501	125 g	1	12

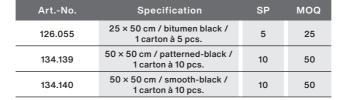



UV Gun Cleaner

Gun cleaner

Description

Gun cleaner

Area of application

- Intermediate cleaning of the UV-gun after application of UV-materials
- Protects the air cap from drying out

Benefits

Fast and easy cleaning

Application advice

■ We also recommend to use the gun cleaner for splashing the paint channels & the body of the spray gun



Silicone Remover Mild

Silicone remover - solvent based

Description

■ Silicone remover Solvent based

Area of application

- Silicone and grease remover
- Cleaning of dirt residues prior to painting
 For all daily cleaning works



ArtNo.	Specification	SP	MOQ
154.615	400 ml	1	6

ArtNo.	Specification	SP	MOQ
146.711	11	1	12
146.704	51	1	4
147.023	30 I	1	1
139.212	drump tap for 30 I	1	1

Silicone Remover Spray

Silicone remover

Description

Silicone remover spray

Area of application

Cleaner for all works prior to painting Removes dirt, fat, oil, silicone, wax, tar, glue residues etc.



ArtNo.	Specification	SP	MOQ
149.423	400 ml	1	6

Silicone Remover Water

Silicone remover - water based

Description

■ Silicone remover Water-based

Area of application

- Removes salt and minerals
- spray guns





ArtNo.	Specification	SP	MOQ
146.705	51	1	1

H₂O Cleaner

Cleaner



Description

- Intensive cleaner

Area of application

- Efficient and environmently friendly cleaning of tools
- and parts in the body shop
- Perfect for paint stripping from panel stands

Benefits

- Removes water-based and solvent-based paints,
- 2K primers and epoxy resin-based products

 Multiple times usage (pigments sediment on the bottom
- and can be strained off)

 Water-dilutable

Application advice

- Air nipples can start oxidating after a long time exposure
 Aluminum nipples could corrode

ArtNo.	Specification	SP	моо
151.953	51	1	1

ISO-VE 7030

Isopropanol cleaner

Description

- Special cleanerIsopropanol-based

Area of application

- Perfectly suitable for gentle cleaning of plastic, GRP or CRP surfaces

 Residue-free removal of release
- agents, dirt, grease, oil, silicone, as well as residual minerals and salts from the surface
- Antistatic

Benefits

- Antistatic
- Very volatileExtremely fast cleaning

Application advice

Could etch 1K materials





Staub Stop Super Wave

Tack cloth

Description

- Tack cloth
- Cotton-rayon mix in wave form Wave formed surfaceFree of silicones
- Area of application

Removal of dust prior to painting

- Wave form enlarges the absorption quantity
- Is able to hold incredible amounts of dust
 Wave form adapts to hand and surface

ArtNo.	Specification	SP	MOQ
154.034	51	1	1
157 345	201	1	1

ArtNo.	Specification	SP	MOQ
148.124	1 unit	1	50



STAUB-STOP WATER



Staub Stop Water Black

Tack cloth



NEW

Description

- Tack cloth
- Non-woven with hot melt-impregnation
 Silicone & lint free

Area of application

- Removal of dust
- Especially for cleaning the surface before applying water-based top coats

Benefits

- Black non-woven cloth offers visual control of contaminated areas, on the tack cloth
- Resealable packaging
- Leaves no adhesive residues on the cleaned surface
 Acrylic binder for better durability and abrasion resistance
- without fiber loss
- Retains twice as much dust than traditional tack cloths

ArtNo.	Specification	SP	MOQ
158.033	10 pcs. / black / 32 × 40 cm	10	180



Description

- Tack clothRayon fabricSlightly sticky surfaceFree of silicones

Area of application

■ Dust removal prior to painting

Benefits

- Very good dust removal
- Does not dry out

Art.-No.

132.615

132.616



Staub Stop Water

Tack cloth

Description

- Tack cloth
- Micro fiber fabric
- Water-soluble impregnationFree of silicones

Area of application

- Absorption of dustEspecially for cleaning the
- surface before applying water-based top coats Especially, for cleaning of
- dry water-based top coats

Benefits

MOQ

500

100

1

- No tacky residues
- Never leaves streaks of resin

ArtNo.	Specification	SP	MOQ
144.538	10 pcs.	10	240

Car Clean Multi Extreme Box

Cellulose cloth

Description

- Special cellulose cleaning cloth250 tear-offs in a dispenser box
- 100 % rayon fabric

Area of application

■ Universal cleaning cloth for all cleaning works

Benefits

- High absorbing cloth
- Good solvent resistanceTear resistant
- Lint free due to cutted edges
 Washable and reusable

ArtNo.	Specification	SP	MOQ
142.765	Box à 250 pcs. / 32 × 38 cm	1	1

Specification

1 unit

5 units (pack)

Car Clean Multi

Paper cleaning cloth

Description



■ Perforated roll





Area of application

- Perfect for higher amounts of liquid
- For paint, metal and smooth wooden surfaces
 Takes off solvents, oil and lubricants

- High absorbing clothGood solvent resistance

■ Tear resistant

ArtNo.	Specification	SP	MOQ
134.577	500 tear-offs / 36 × 32 cm	1	1

Car Clean Multi Box

Paper cleaning cloth

Description

- Special paper cleaning cloth 250 tear-offs in a dispenser box

Area of application

- Perfect for higher amounts of liquid
- For paint, metal and smooth wooden
- Takes off solvents, oil and lubricants

Benefits

- High absorbing cloth
- Good solvent resistance
- Tear resistant
- Lint free due to cutted edges



Car Clean Double Blue

Paper cleaning cloth

Description

- Paper cleaning cloth 2-layers
- Perforated roll
- Layers fully bonded

Area of application

■ For all standard cleaning works



ArtNo.	Specification	SP	MOQ
134.580	1,000 tear-offs / 36 × 36 cm	2	2

Car Clean Triple Blue

Paper cleaning cloth

Description

- Paper cleaning cloth 3-layers
 Perforated roll
- All layers fully bonded

Area of application

For all standard cleaning works



ArtNo.	Specification	SP	MOQ
134.578	500 tear-offs / 36 × 36 cm	2	2
134.579	1,000 tear-offs / 36 × 36 cm	1	1

Car Clean Double White

Paper cleaning cloth

Description

- Paper cleaning cloth 2-layers
- Perforated roll
- Area of application





ArtNo.	Specification	SP	MOQ
141.253	1,500 tear-offs / 38 × 24 cm	2	2

Cleaning wipes



Description

- Special cleaning wipesDispenser roll for the Carsystem dispenser bucket
- Fine multi-holes

Area of application

Universal soft cleaning cloth for all cleaning works

Benefits

- Extremely absorbent
- Solvent resistant
- Lint-free cleaning ■ Ultra soft
- Cleans also in deepest structures
 Extremely tear resistant, even when wet
- Washable and reusable
 "Ready to use" cleaning wipes out of the Carsystem dispenser bucket

Application advice

■ We recommend to use only the Carsystem ISO VE 7030 cleaner

ArtNo.	Specification	SP	MOQ
156.457	wipes soft roll for bucket / 100 tear-off / 30 × 32 cm	1	6
156.459	bucket for wipes soft	1	1

Cleaning wipes

Cleaning wipes

Description

- Special cleaning wipesDispenser roll perforated tear-offsFine multiholes

Area of application

Universal soft cleaning cloth for all cleaning works

Benefits

- Extremely absorbent
- Solvent resistantLint-free cleaning
- Ultra soft
- Cleans also in deepest structures Extremely tear resistant, even when wet

For industrial and professional use only.

■ Washable and reusable

ArtNo.	Specification	SP	MOQ
156.458	cleaning wipes roll soft / 475 tear-offs / 38 × 30 cm	2	2

Chamois

Synthetic leather

Description

- Synthetic glass cleaning leatherSurface with multi-holes

Area of application

- Cleaning of windows and mirrorsWater displacement after car wash

Absorbs all water drops without residues

ArtNo.	Specification	SP	MOQ
140.983	40 × 35 cm	1	30



Description

Soft swelling sponge made of absorbent natural fibers



ArtNo.	Specification	SP	MOQ
139.858	squeezer sponge - neutral	1	520
157.987	Squeezer sponge with Carsystem branding	1	520

Scraper

Paint off blade

Description

■ Paint off security blade

Area of application

■ Removal of overspray from glass surfaces



ArtNo.	Specification	SP	MOQ
140.984	Scraper	1	200
140.985	Refill (100 Blades)	1	50

Pump Spray

Pump spray

Description

- Pump spray bottle100 % recycled plasticContent: Max. 0,9 I

Area of application

- Application and atomisation of
- liquids out of buckets or barrels

 Suitable for Carsystem Silicone Remover Mild, Silicone Remover Water and ISO-VE 7030

Benefits

Adjustable atomisation

ArtNo.	Specification	SP	MOQ
157.412	white / 1 I	1	60
142.808	translucent / 11	1	60
139.606	replacement viton sealing set	1	1
146.680	spare nozzle	1	1
153.269	replacement viton sealing spray head	1	1

Coding Caps

Colour code rings



Description

Plastic colour code rings

Area of application

Colour coding for Carsystem pump bottles

Benefits

■ Pump bottles can be clearly distinguished

ArtNo.	Specification	SP	MOQ
152.642	coding caps set of 5 pcs.	1	1

Cockpit-Spray

Cleaning spray

Description

- Care and cleaning spray ■ Free of silicones
- Odour: Citrus

Area of application

All interiour plastic and rubber surfaces

Benefits

Antistatic

Application advice

Art.-No.

126.020

Avoid application on steering wheel, gear handle and foot pedals



MOQ

1 12

Gun Clean Set

Gun cleaning set

Description

- Gun cleaning set
 17 single items
- 6 different needles and
 11 different brushes



ArtNo.	Specification	SP	MOQ
157.520	Set	1	50

Nano Easy Cleaner

Cleaning sponge

Description

Cleaning sponge with nano coating

Area of application

- Cleaning of glass, paint and plastics Suitable for windows, head lamps, mirrors and painted surfaces
- Do not use in conjunction with cleaning agents, cleaner can attack the nano coating

■ Special nano coating removes insects, overspray and dirt easily

ArtNo.	Specification	SP	MOQ
143.383	cleaning sponge	1	10

Finish Clay

Cleaning clay

Description

Cleaning clay

Area of application

Residue and scratch-free removal of overspray, flash rust, insects and tree gum from painted surfaces

- Enviromently friendly no solvents
- Remains wet and does not get brittle (store it in the box)

ArtNo.	Specification	SP	MOQ
147.468	200 g	1	10

Specification

transparent / 400 ml

PREP HAND

NEOPREN HAND HAND CLEANER

STAR MASK NITRIL HAND PREMIUM

DISPOSABLE PROTECTIVE COVERALL

PERSONAL SAFETY

RESPIRATOR MASKS FFP2 FFP3
SAFETY LENS UV-PROTECTIVE GLASSES
COVERALL BLACK SUIT STAR DUST
LATEX HAND PREMIUM



Star Mask

Respirator





Description

- Half mask with filters
- Exchangable filters and pre-filters
- Bayonet fixing on the filtersProtection class FFA2 P2 R

Area of application

All common paint works

Benefits

- Perfect protection against dust, dirt, organic vapours of solvents
- Pre-filter for a longer lifetime of the filters

Application advice

Attention to different regional legislations

ArtNo.	Specification	SP	MOQ
141.143	М	1	12
141.145	L	1	12

Star Mask Refill

Charcoal filter

Description

- Replacement filters for the
- Star Mask
- Charcoal filters protection class A2

Area of application

■ Protects against dust, dirt and organic vapours

ArtNo.	Specification	SP	MOQ
141.224	Protection class A2	2	60

Star Mask Pre P2 R

Pre-filters



■ Pre-filters for Star Mask Refill ■ Protection class P2



Protects against particles e. g. dust, smoke and aerosols



ArtNo.	Specification	SP	MOQ	
141.154	Protection class P2	10	100	

Star Mask Disc

Filter frame

Description

Frame for the Carsystem Star Mask Pre P2 R pre-filters

Area of application

Art.-No.

144.310

Specification

Filter Holder

■ The frame fixes the pre-filter on the charcoal filter



2

MOQ

20

NEW

Star Dust P2

Dust mask

Description

- Dust mask / FFP maskProtection class FFP2 NR
- Variable aluminium nose stripe for better fitting

Area of application

■ Protects against harmful oil or water-based particles

Benefits

Soft and gentle inner section Suitable in combination with safety glasses

Application advice

■ We recommend to exchange the mask after every work shift

ArtNo.	Specification	SP	MOQ
140.951	Protection class P2	20	120

Respirator Mask FFP2 with valve

Respirator mask

Description

- Dust mask / FFP mask ■ Protection class FFP2 NR
- Variable aluminium nose stripe
- for better fitting ■ Exhaust valve

Area of application

■ Protects against harmful oil- or water-based particles

Benefits

- Soft and gentle inner section
- Suitable in combination with safety glasses
 Exhaust valve reduces the heat accumulation
- inside the mask

Application advice

■ We recommend to exchange the mask after every work shift

ArtNo.	Specification	SP	MOQ
158.075	Protection class FFP2 NR	20	120

Respirator Mask FFP3 with valve

Respirator mask FFP3

Description

- Dust mask / FFP mask ■ Protection class FFP3 NR
- Variable aluminium nose stripe
- for better fitting
- Exhaust valve

Area of application ■ Protects against harmful and carcinogenic

particles based on oil or water as well as against radioactive particles, airborne biological agents of risk groups 2 + 3 and enzymes

Benefits

- Soft and gentle inner sectionQualitative headbands for a comfortable fit
- Foam stripe around the nose Suitable in combination with safety glasses
- Exhaust valve reduces the heat accumulation inside the mask

Application advice

■ We recommend to exchange the mask after every work shift

ArtNo.	Specification	SP	MOQ
158.076	Protection class FFP3 NR	20	120



NEW



Safety Lens

Protective glasses



Description

- Safety glassesPolycarbonate glasses

Application advice

■ Glasses can be cleaned with warm water and soap

ArtNo.	Specification	SP	MOQ
140.955	Safety Lens	1	12

Safety Lens Vario

Protective glasses



Description

- Safety glassesPolycarbonate glassesVariable temples

Application advice

Glasses can be cleaned with warm water and soap

ArtNo.	Specification	SP	MOQ
140.954	Safety Lens Vario	1	10

UV Brille

UV-protective glasses



Description

- UV-protective glasses
- Polycarbonate glasses

Area of application

■ Protects from UVA, UVB and UVC radiation

Benefits

- PVC nose piece for perfect fitAnti-slip pads
- Scratch resistant, anti-fog glasses
 Suitable in combination with hearing protection

Application advice

■ Glasses can be cleaned with warm water and soap

ArtNo.	Specification	SP	MOQ
154.263	UV glasses	1	12

Disposable protective coverall

Protective Coverall



Description

- Disposable protective coverall
 PPE-Cat III, Type 5 and 6
- Free of silicone and latexDust and lint free

Area of application

- Perfect for painting in the spray booth
 Protects against overspray, solvents, water and harmful dust

Benefits

- Antistatic coating (EN 1149-5:2008)
 Breathable
 The knitted cuffs close wrists and ankles perfectly tight and offers a perfect comfort
- Antistatic

Application advice

We recommend to exchange the protective coverall after every shift to prevent linting on the breathable back side

ArtNo.	Specification	SP	MOQ
155.616	S	1	25
155.617	М	1	25
155.618	L	1	25
155.619	XL	1	25
155.620	XXL	1	25
155.621	XXXL	1	25

Paint Overall Blau

Protective coverall



Description

- Protective coverall
- Soft polyester fabric
 PPE-Cat. I

Area of application

Protects from unharmful chemicals e. g. water-based paint or mild cleaners

- Antistatic coating (EN 1149-1:2006)
 Dust and lint-free
- Protection against overspray
 Free of silicones

ArtNo.	Specification	SP	MOQ
139.232	S	1	50
139.233	M	1	50
138.472	L	1	50
138.473	XL	1	50
139.234	XXL	1	50
152.968	3XL	1	50

Carbo 2 Perfect

Protective coverall



Description

- Two-piece protective coverall
 98 % polyester, 2 % carbon
 Washable up to 40°C
 PPE Cat. I

- Free of siliconesDust and lint free

Area of application

Protects from unharmful chemicals e. g. water-based paint or mild cleaners

Benefits

- Antistatic coating (EN 1149-1:2006)
 Protection against overspray
 Breathable due to ventilation slots and mesh areas
 The knitted cuffs close wrists and ankles perfectly tight and offer a perfect comfort

ArtNo.	Specification	SP	MOQ
156.547	jacket Carbo 2 Perfect / M	1	25
156.548	pants Carbo 2 Perfect / M	1	25
156.549	jacket Carbo 2 Perfect / L	1	25
156.550	pants Carbo 2 Perfect / L	1	25
156.551	jacket Carbo 2 Perfect / XL	1	25
156.552	pants Carbo 2 Perfect / XL	1	25
156.553	jacket Carbo 2 Perfect / XXL	1	25
156.554	pants Carbo 2 Perfect / XXL	1	25



COVERALL BLACK SUIT

Protective coverall



- Description
- Protective coverall
 99 % nylon, 1 % carbon
 Washable up to 30°C
 PPE Cat. I
- Free of silicones
- Dust and lint free

Area of application

Protects from unharmful chemicals e. g. water-based paint or mild cleaners

- Antistatic coating (EN 1149-3:2004)
 Protection against overspray
 Extremely breathable due to its special elastic birds eye fabric

- The knitted cuffs close wrists and ankles perfectly tight and offer a perfect comfort
- Elastic areas on the back and modern cut provide a perfect adaption to the body shape

ArtNo.	Specification	SP	MOQ
157.775	S	1	20
157.776	М	1	20
157.777	L	1	20
157.778	XL	1	20
157.779	XXL	1	20
157.780	3XL	1	20



Nitril Hand Premium black

Protection gloves

Description

- 100 pieces in a dispenser box
 Free of silicones, latex and powder

Protects against dirt, paint and chemicals

Benefits

Enhanced thickness

Area of application

- Very elastic and tear resistant
- Perfect fit and feel

Application advice

- Short time solvent resistant
- Touch screen processing is possible

ArtNo.	Specification	SP	MOQ
156.623	S	100	1000
156.624	M	100	1000
154.347	L	100	1000
154.348	XL	100	1000

Latex Hand I Premium

Protection gloves

Description

- Latex gloves 50 pieces in a dispenser boxPowder-free
- Extra long cuff

Area of application

- Perfect for fast gun cleaning
- Protects from light solvents and paints

Benefits

- Extra thick
- Perfect feel and touch when working with solvents and in wet / oily environments

ArtNo.	Specification	SP	MOQ
152.011	L	50	500
152.012	XL	50	500

Latex gloves Protective gloves

Description

- Latex gloves
- 100 pieces in a dispenser boxSlightly powdered

Area of application

■ Protects against dirt, paint and

Benefits

■ Slight powder shift makes it easy to put the gloves on and off

ArtNo.	Specification	SP	MOQ
157.981	L	100	1000

Neopren Hand

Protection gloves

Description

- Neoprene / Latex chemica

protection gloves Length: 30 cm

- Area of application
- Perfect for handling slippery parts in moist, oily and greasy environments
 Protects against chemicals acids, brines, mineral oils, greases and solvents

Benefits

- Perfect mixture between neoprene for chemical protection
- and latex for the flexibility and durability
- Palm and fingertips with honeycomb pattern for a better grip
 Good insulation against heat and cold

ArtNo.	Specification	SP	MOQ
140.939	L / Pair	1	12
140.940	XL / Pair	1	12
140.941	XXL / Pair	1	12
	140.939 140.940	140.939 L / Pair 140.940 XL / Pair	140.939 L / Pair 1 140.940 XL / Pair 1

ASAP Thick Nitril PF

Protection gloves



Description

- Nitril gloves
- 100 pieces in a dispenser box
 Free of silicones, latex and powder

Area of application

■ Protects against dirt, paint and chemicals

Benefits

- Elastic and tear resistant
- Gives a great fingertip touch

Application advice

- Short time solvent resistant
- Touch screen processing is possible

ArtNo.	Specification	SP	MOQ
158.029	S	100	1000
158.030	М	100	1000
158.031	L	100	1000
157.385	XL	100	1000

Super Nitril Hand I

Protection gloves

Description

- Chemical protection gloves
- Length: 30 cm
- Soft velour inner section
 Base layer: Nitril

Area of application

- Perfect for handling slippery parts in moist, oily and greasy environments
- Protects against chemicals

Benefits

- Perfect feel and touch when working with solvents and in wet /
- Good insulation against heat and cold
- Palm and fingertips with honeycomb pattern for better grip

ArtNo.	Specification	SP	MOQ
145.130	9 / Pair	1	144
145.131	10 / Pair	1	144

Prep Hand Cut II

Protectiion gloves

Description

- Cut protection glovePalm and fingertips PU coated
- Base layer: HPPE-glass fiber
 ISO 13997- cut value: C

Area of application

Perfect for all assembly work with the risk of cuts

- Breathable
- Safer grip
- Abrasion resistance

-	Comfortable	fit	

ArtNo.	Specification	SP	MOQ
155.539	10 / Pair	1	100



Prep Hand II

Work gloves

Description

- Work gloves PU coatedPalm and fingertips PU coatedBase layer: Polyamide (Nylon)

Area of application

■ Perfect for assembly work without the risk of cuts or exposure to chemicals / solvents

Benefits

- Breathable
- Safer grip with excellent fingertip touch
- Abrasion resistance
 Comfortable fit

ArtNo.	Specification	SP	MOQ
150.719	L	12	144
150.720	XL	12	144
150.721	XXL	12	144

Prep Hand III

Work gloves

Description

- Work gloves PU coated
 Palm and fingertips soft PU coated
 Base layer: Polyamide

Area of application

■ Perfect for assembly- and grinding exposure to chemicals / solvents

Benefits

- Extremely soft and flexibleBreathable
- Safer grip with excellent fingertip touch
- Touch-screen operation possibleAbrasion resistance
- Perfect fit

ArtNo.	Specification	SP	MOQ
145.132	9 / Pair	12	144
145.133	10 / Pair	12	144

Hand Cleaner extreme

Hand cleaner



Description

- Intensive hand cleaner
- Usage during or after work
- Free of silicones
- Plant based scrubs

Area of application

Removes even resistant dirt of paint, oil paint and resins

Benefits

- Pleasant apple smell
- Free of solventsBiodegradable
- Smooth and comfortable feel due to a natural and skin-friendly oil
 Wall mount with 2 I soft bottle
- Bulk packing with 3 I

ArtNo.	Specification	SP	MOQ
155.348	Soft bottle without wall dispenser / 2.0 I	1	6
155.357	Bulk packing without pump / 3.0 l	1	6

Hand Cleaner

Hand cleaner



Description

- Mild hand cleaner
- Usage during or after work
 Free of silicones
- Plant based scrubs

Area of application

Removes even resistant dirt of greases and bitumen

Benefits

- Pleasant smellFree of solvents
- Biodegradable Smooth and comfortable feel due to a natural and skin-friendly oil
- Bulk packing with 3I

ArtNo.	Specification	SP	MOQ
155.356	Bulk packing without	1	6

Pump for Hand Cleaner 3 I

Pump for Hand Cleaner classic



_	Coonpaidin
=	Wall dispenser for Hand Cleaner
	extreme Soft Bottle

Wall dispenser for

Soft Bottle 2 I Wall Dispenser

Description



ArtNo.	Specification	SP	MOQ	ArtNo.	Sp
155.359	Pump for Hand Cleaner 3 I	1	1	155.350	Wall

ArtNo.	Specification	SP	MOQ
155.350	Wall dispenser for Soft Bottle	1	1

CAR CLEAN TROLLEY

SAFETY KNIFE UV LED LAMP XL

WORK SHOP BUCKET PAINT TROLLEY

X-STAND ACCESSORIES PAPER

UV TIMER COLOUR MATCH LAMP

PAINT TROLLEY WORK SHOP SEAT

UV SMART LAMP MAGNETIC FLAT STRIP

MINI INFRARED THERMOMETER



UV Smart Lamp

UV hand lamp



Description

- Power: 5 watt
- Battery: 3.7V 2.6 Ah Li-Ion
- Charging time: 4 hoursRunning time: 4,5 hours
- Working temperature: -10°C to +40°C

 Weight: 310 g

 Dimensions: 190 × 56 × 29 mm

 Certification: IP65 | IK07

Area of application

UV hand lamp for curing UV products for spot repair on a surface with a maximum diameter of 10 cm

Benefits

- Battery operated UV hand lamp for flexible use
 Adjustable magnetic stand for working on vertical application areas
- Hook for space-saving storage

Application advice

- Always protect your eyes when using UV lamps
 Wear Carsystem UV safety glasses

ArtNo.	Specification	SP	мод
153.777	190 × 56 × 29 mm	1	12

UV LED Lamp XL

UV LED lamp XL



Description

- Power: 30 watt

- Power: 30 watt
 Battery: 11.1V 5.2 Ah Li-lon
 Charging time: 3 hours 45 minutes
 Working time: 2,5 hours
 Working temperature: -10°C to +40°C
- Weight: 1,34 kg
 Dimensions: 266 × 237 × 59 mm
 Certification: IP65 | IK07

Area of application

UV LED lamp for curing UV products on a surface with a maximum diameter of 70 cm at a distance of 30 cm

- Battery operated UV LED lamp for flexible use
 180° swivel stand to set the required lighting angle
- Operation during charging process possible
 Extremely robust and resistant

Application advice

- Always protect your eyes when using UV lamps.Wear Carsystem UV safety glasses.

,	ArtNo.	Specification	SP	MOQ
	155.036	UV LED Lamp XL	1	6

Tripod for LED Lamps

Description

Tripod for holding up to 3 LED Lamps



ArtNo.	Specification	SP	MOQ
154.646	Tripod for LED Lamps	1	6

Specification

Timer for UV Lamps

Magnet for LED Lamps

Magnet

Description

Magnet for flexible fixing of LED Lamps



ArtNo.	Specification	SP	MOQ
154.648	Magnet for LED Lamps	1	60

Timer

Timer for UV Lamps

Description

Art.-No.

154.772

UV Timer to control drying times



SP

1 1

MOQ

Mini Infrared Thermometer

Infrared mini-thermometer

Description

- Robust aluminium housingImpact-free measuring of temperatures
- between -33°C and +220°C

Area of application

For measuring object temperatures on surfaces

Application advice

- For measuring temperatures, point the detector head to the
- object and press the measuring button for about one second

 The display can be switched between (°C/°F) by the tip of a ball pen, pressed into the pit on the backside of the housing

ArtNo.	Specification	SP	MOQ
144.557	Mini Infrared Thermometer	1	1



LED Lamp

LED lamp



Description

- Power: 20 watt
- Battery: 11.1V 4.4 Ah Li-lon
- Charging time: 4 hours
 Running time: depending on mode: 10 Std. / 5 Std. / 2,5 Std.
- Light intensity: Mode 1 = 500 lumen Mode 2 = 1.000 lumen

- Mode 3 = 2.000 lumen

 Working temperature: -10°C to +40°C
- Weight: 1.15 kg
 Dimensions: 225 × 220 × 70 mm
 Certification: IP65 | IK07

Area of application

■ LED lamp for universal use in every working enviroment

Benefits

- Battery powered LED lamp for flexible use
- 180° swivel stand to set the required lighting angle
 Power selection

- Very even light level due to COB-LED-technology
 Extremely robust and resistant

ArtNo.	Specification	SP	MOQ
155.037	LED Lamp	1	6

Colour Match Lamp

Day light lamp



Description

- Power: 5 watt

- Power: 5 watt
 Battery: 3.7V 2.6 Ah Li-Ion
 Charging time: 4 Stunden
 Running time: 2,5 Stunden
 Light intensity: 1. Mode = 2,700K 500 lumen CRI>96+
 2. Mode = 4,500K 500 lumen CRI>96+
- 3. Mode = 6,500K 500 lumen CRI>96+

 Working temperature: -10°C to +40°C
- Weight: 310 g
 Dimensions: 190 × 56 × 29 mm
- Certification: IP65 | IK07

Area of application

■ LED Colour matching lamp

Benefits

- Battery powered LED lamp for flexible use
 Adjustable magnetic stand for work on vertical application areas
 Choice between three different colour temperatures
- Extremely robust and resistant

ArtNo.	Specification	SP	MOQ
155.614	Colour Match Lamp	1	12

For industrial and professional use only.

Blow off gun

Blow off gun



Description

- Ergonomic handle
- Scratch resistant
- Maximum pressure: 10 bar
 Temperature resistance: -15°C to +70°C

Area of application

For blowing off residual dust from all surfaces

Benefits

- Blow off gun with metal tip for precise cleaning of surfaces and cavities
- Blow off gun with noise reduction to ~ 77 db with a scratch preventing plastic nozzle

ArtNo.	Specification	SP	MOQ
145.270	Blow Off Gun with sound absorption and nipple (EU)	1	5
145.271	Blow Off Gun with sound absorption and nipple (CH, NL)	1	5
145.272	Blow Off Gun with metal nozzle and nipple (EU)	1	5
145.273	Blow Off Gun with metal nozzle and nipple (CH, NL)	1	5

Blow off stick

Blow off stick



Description

- Noise reduction
- Chemical resistant
 Air consumption: 450 I / min. at 10 bar
- Temperature resistance: -40°C to +150°C

Area of application

For blowing off residual dust from all surfaces

Rubber tip prevents from scratching the surface

		_	_
ArtNo.	Specification	SP	MOQ
154.123	Blow Off Pen Orion (EU)	1	200
154.124	Blow Off Pen ARO (CH, NL)	1	200

Specification

50 ml

RUPES Cleaning and maintenance oil

Maintenance oil

Description

- Transparent maintenance oilSilicon-free

Area of application

Art.-No.

150.190

Maintains and lubricates pneumatic grinding and polishing machines

Benefits

- Also applicable at low temperatures
- Corrosion and wear protection



SP

1

Workshop seat

Workshop seat

Description

- bearings Max. load: 150 kg

Area of application

■ Comfortable work shop seat in Carsystem

Benefits

■ Magnetic storage platform for tools and working materials

ArtNo.	Specification	SP	моо
149.427	Work shop seat	1	1

- Hydraulic height adjustmentThe seat is resistant against chemicals
- Smooth seat cushion for easy cleaning
 Five rubber-protected wheels on ball

design for all sanding and polishing works

MOQ	
5	_

ArtNo.	Specification	SP	MOQ
139.442	Workshop bucket / 10 I	1	1

Paint Trolley

Bumper paint stand

Description

- Height adjustable bumper paint stand
 Infinitely adjustable inclination
 Ergonomic working position
 Mobile on wheels
 All wheels individually lockable

- For a huge variety of different bumpers

Area of application

For assembly, sanding, painting or polishing of different bumpers

ArtNo.	Specification	SP	MOQ
148.748	Bumper paint stand	1	1

Magnetic Flat Strip

Flat strip

Description

■ Flexible plastic strip



Flat and magnetic adhesive plastic strip for sealing the masking film onto the car

ArtNo.	Specification	SP	MOQ
137.214	4 × 55 cm	1	5

Magnetic Sanding Protection

Edge protection



■ Flexible plastic edge protection



■ Magnetic edge protection avoids unwanted sanding on surrounding parts

ArtNo.	Specification	SP	MOQ
130.992	4 × 55 cm	1	5

X-Stand Classic

Workshop bucket

Description

Capacity: 10 I

Area of application

■ Universal work shop bucket

Paint stand

Description

- Height: 50 100 cm
 Maximum load: 50 kg

Area of application

■ Holding different car parts e. g. hoods, doors etc.

ArtNo.	Specification	SP	MOQ
137.349	50 - 100 cm	1	1

X-Stand Top

Paint stand



Description

Height: 50 – 125 cm
 Maximum load: 120 kg

Extension poles available in 55 cm

Area of application

Holding different car parts e. g. hoods, doors etc.

ArtNo.	Specification	SP	MOQ
138.851	50 – 125 cm	1	1
138.852	50 - 125 cm incl. extension	1	1

Paint Trolley Flexi Plus

Paint stand



Description

- Mobile paint stand with 28 × adjustable axle
 Extremely robust

- Extremely roots
 Six fixing arms
 Two additional bumper fixing arms
 Dimensions: 225 x 74 x 101c m (I/w/h)
 Maximum load: 50 kg

Area of application

■ Holding different car parts e. g. hoods, doors, bumpers, fenders etc.

- Extremely good qualityVery high stability

ArtNo.	Specification	SP	MOQ
152.596	Paint trolley incl. extention	1	1

Paint Trolley

Paint stand



Description

- Mobile paint stand with 360° adjustable axle

- Mobile paint stand with 360° adjustable axle
 Four fixing arms
 Two additional bumper fixing arms
 Two hooks for storing of unused fixing arms
 Paint gun holder
 Dimensions: 225 × 88 × 95 cm (I/w/h)
 Max. load: 50 kg

Area of application

■ Holding different car parts e. g. hoods, doors etc.

ArtNo.	Specification	SP	MOQ
138.848	spare claws for paint trolley	1	1
138.849	fixing arm	1	1
154.253	paint trolley incl. extention	1	1

Paper Trolley

Triple paper stand

Description

- Mobile paper stand for three different paper sizes (22, 60, 90 cm)
 Including adjustable holders for masking tape rolls which fix the tapes perfectly onto the paper edge
 Dimensions: 135 × 59 × 110 cm (I/w/h)

Area of application

For fast masking work in the paint shop



Paper Trolley 1500

Paper stand

Description

Mobile paper stand for rolls up to 150 cm

Area of application

For fast masking work in the paint shop



ArtNo.	Specification	SP	MOQ
138.862	Paper Trolley	1	1

ArtNo.	Specification	SP	MOQ
139.101	150 cm	1	1

MMIR Trolley "Box"

Masking film stand



ArtNo.	Specification	SP	MOQ
151.514	MMIR Trolley Box	1	1

Description

Mobile masking film stand for rolls in a box. The film is unrolled directly from the box.

Area of application

For fast masking work in the paint shop

Specification

MMIR Trolley

MMIR Trolley

Masking film stand

Description

- Mobile masking film stand for
- holding rolls without a box

 Dimensions: 106 × 44 × 92cm (I/w/h)

Area of application

Art.-No.

125.737

For fast masking work in the paint shop



MOQ

1 1

Car Clean Trolley

Cleaning paper stand

Description

Floor stand or wall holder for cleaning paper rolls with a width up to 40 cm incl. garbate bag holder included

Area of application

■ For flexible cleaning jobs in the paint shop



ArtNo.	Specification	SP	MOQ
139.912	Car Clean Trolley	1	1
139.913	Car Clean Wall Holder	1	1

Safety Knife

Cutting tool



Description

- Safety knife
- Safety Knife
 Basematerial: Glass fibre reinforced plastic
 Weight: 24,4 g
 Cutting depth: 6,2 mm
 Scraper blade: 21 mm
 Dimensions: 148 × 11 × 37,2 mm (I/w/h)

NEW

Area of application

- Scraping, scratching, cutting:
 Masking film or paper
 Wrapping, stretch and shrink film
 Transport
- Cardboard up to 2-ply
- Sticker and labels

Benefits

- Highest level of safety occupational safety
 Multifunction: Scraping, scratching, cutting

- Suitable for right and left handers
 Very ergonomic and comfortable to use


Application advice

- The perfect cutting angle is 45°
 We recommend to fix f.e. masking film

- with the free hand, while cutting

 Fixed blade, no exchange necessary

ArtNo.	Specification	SP	MOQ
158.212	black / 148 × 11 × 37,2 mm	1	10

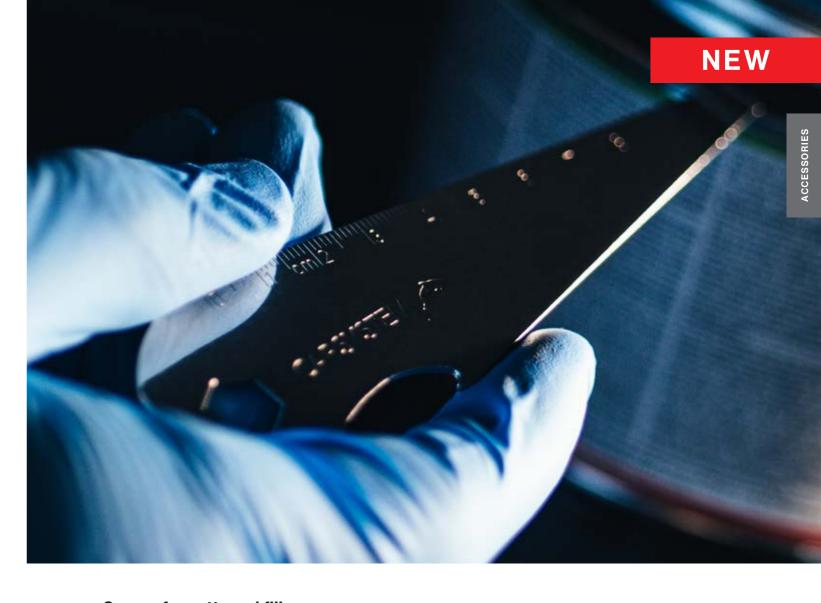

Opener for putty and filler cans

Stainless steel can opener

For industrial and professional use only.



Description

- Multifunctional opener for putty and filler cans
- Hexagon recess (10 mm wrench)
 Mandrel

- Engraved ruler
 Bottle opener
 Dimensions: 13.2 cm
- Material: Stainless steel

Area of application

- Opening of putty and filler cans, bottles and
- machine-locked clamping rings

 Venting cans and canisters
- Screw connection (10 mm wrench)0

ArtNo.	Specification	SP	MOQ
158.209	stainless steel / 13.2 cm	1	1





Quickfinder-

1
1K Easy Filler118
1K Easy Primer .117 1K Epoxy Primer .117 1K NC Filler .072
2
2K Carbo Clear Plus102
2K Clear VOC CC.19 AS
2K Clear VOC HS-SR
2K Clear VOC Matt101
2K Clear VOC Premium
2K Epoxy Grundierfüller114
2K Filler Air Plus
2K Filler Vario Plus105 2K Filler Wet on Wet Plus106
2K High-Speed Klarlack114
2K VOC Filler 540104
A
Acryl Thinner
Activator107 AF.211K Filler104
AF.21 X-pert103
Air hose
Aluminium mesh
Anti Rust Putty
Applicator
Auto Mask
В
Bite019
Black Tape
Blow off gun191
Blow off stick
Booth Mask
Booth Mask White112
BPO Hardener071 Brush Set125
Bumper Paint Spray123
Bumper Paint
C
C-Wax C-80134
Car Clean Double Blue170
Car Clean Double White
Car Clean Multi Extreme Box169
Car Clean Multi
Car Clean Trolley196
Car Mop white
Car Mop yellow145 Car Pad black147
Car Polish Roll147
Carbo 2 Perfect
Carbo Spray069
Carbo Spray Thinner
CC.21 X-pert
Chamois
Classicline Soft Pad015 Clear Coat Spray122
Cleaning wipes171
Cockpit-Spray 172 Coding Caps 173
Color Match Card Paper124
Colour Match Lamp
Control-Spray
D
Dispenser for 5 kg Polish138

Dispenser Multi-Mix	109
Dispenser (Putty dispenser)	
Dispenser bottle incl. Cap	
Disposable protective coverall	
Dry Coat-orange	
Dry Coat-black	
Dualmatic	
Dust Keeper	
Dust Needle	
-	
<u>E</u>	
Easy Clean Box	
Easy Mask	
EF.21 EP-Filler	
Elastic Additive	
Elastic beige	
Elastic Green	
Elastic weiss	
Etch Primer	
Excenter Back Pad Multi M	
Excenter Back Pad T.19	
Excenter Classic	042
F	
Faser	065
Fine putty	
Felgo Tape	
Fill	
Fine Block	033
Fine Line Tape Blue	
Finish Back Pad	139
Finish Clay	173
Finish Foam Black AH	
Finish Foam orange	144
Finish Foam White AH	144
Finish Control Foam C-99	135
Finish Quadra Pad C10	143
Finish Sander Back Pad	043
Finish Sander RC 9332	042
Finish Sandwich Pad C30	143
Finish Waffle Foam Black AH	144
Finish Waffle Pad orange	145
Flex	068
Floor Mats	093
Foam Tape	
Foam Tape T-Soft	
Fill putty	074
G	
Glas	066
Glas White	066
Glass fibre fabric	075
Glass fibre mat	075
Glass fibre fleece	
Glass fibre reinforced putty	075
Gun Clean Set	172
н	
H ₂ O Cleaner	167
H ₂ O Cleaner Hand Cleaner extreme	
Hand Cleaner extreme Hand Cleaner	
Hand Cleaner Hand Mask	
Hi Temp	
High Gloss Additive	
HpP Primer	
HS-Acryl Tape	
П	
	042
Interface PadISO-VE 7030	
J Donas Duttu Kaife	070
Japanese Putty Knife	079
K	
KS-100	157
KS-1000	
KS-1050	160

KS-250 159 KS-300 157 KS-3000 Plus 158 KS-400 160 KS-4000 159 KS-50 156 KS-500 157 KS-550 160 KS-800 158 KS-850 160	
KS-Brush	
L	
Lambswool Pad gold S147 Lammfell White S Edge146	
Lammfell White S145	
Latex Hand Premium182	
Latex gloves	
Liquid Masking	
Liquid Putty	
М	
Magnet for LED Lamps189	
Magnetic Flat Strip192	
Magnetic Gun Holder	
Magnetic Sanding Protection	
Masking film yellow	
Masking film green	
Masking Paper Master	
Masking Paper Top II 082 Master Tape Green 087	
Master Tape II	
Metallic	
Micro Tip126	
Micro fiber cloth	
Mini Back Pad	
Mini Sanding Machine RC 9330042	
Mini Infrared Thermometer189	
Mixing Stick Alu	
Mixing Stick Black	
MMIR Trolley "Box"195	
MMIR Trolley196	
MMIR-Mask Aqua Tec	
MMIR-Mask Light Green	
MS Air Gun	
MS Coupling127	
Multi Blue Changer	
Multi Green Glas Light	
Multi Green Changer	
Multi Green Plus 1.0 Super Light	
Multi Green	
Multi Green Rapid 060 Multi Green SF 057	
Multi Light054	
Multi Mix Lids108	
Multi Plus	
Multi	
Multi Soft	
Multi Strain111	
Multi Super Flex 067	
Multi-Mix Bucket	
,	
N	
Nano Carnauba Wax136	
Nano Carnauba Wax	
Nano Carnauba Wax136	
Nano Carnauba Wax 136 Nano Easy Cleaner 173 Neopren Hand 183	

Quickfinder

0		Respirator Mask FFP2 with valve	17
Opener for putty and filler cans	197	Respirator Mask FFP3 with valve	
		RUPES 47.105 Replacement carbon brush	
P		RUPES Back Pad	
Pad Saver	044	RUPES Carrier	
Paint Arrestor		RUPES Random Orbital Sander ER	
Paint Overall blue	179	RUPES Orbital Sander RE21ALN	
Paint Planer	033	RUPES Ibrid Nano RUPES Ibrid Nano Q-MAQ	
Paint System CPS	110	RUPES Compact Vacuum Cleaner SV10E	
Paint Trolley Flexi Plus	194	RUPES Mini Random Orbital Sander LD30	
Paint Trolley		RUPES Polishing Machine LH19E	
Paper Trolley 1500		RUPES Angle Polishing Machine LH76P	
Paper Trolley		RUPES Polishing Machine LHR15	
PG-FG Feinfilter		RUPES Polishing Machine LHR75	
Plastic Can Empty		RUPES Polishing Machine LHR75E	
Plastic Cleaner		RUPES Orbital Single-Hand Sander RA75	
Plastic Primer		RUPES Cleaning and maintenance oil	
Plastic Pro		RUPES Orbital Sander SL42AES	
Plastic spreader		RUPES Orbital Sander SLP41A	
Finish Back Pad M-14		RUPES Skorpio E RX	03
Polish C-05 cut		RUPES Skorpio III RH	03
Polish C-10 strong		RUPES Vacuum Cleaner S145	0
Polish C-10 strong Polish C-30 finish		RUPES Random Orbital Sander TA50	
Polish C-30 finish Polish Foam Green		RUPES Random Orbital Sander TA6A	03
Polish Foam Green Polish Foam White SC		RUPES 9. Holder BigFoot	13
Polish Foam White SC Polish Foam Yellow		RUPES Workshop Carrier KC28	
Polish Waffle Foam Yellow		RUPES Angle Polishing Machine LH16ES	14
Polish Warie Foam Yellow Polishing Back Pad		_	
Polishing Machine RC 166		S	
Polish – coarse step 1		S.211K Filler	11
Polish – fine step 2		S.211K Clear Coat	
Polyester Repair Resin		S.211K Primer	
Polyester Repair Set		S.212K High-Speed Clear Coat	
Power Mix		S.21 Silver Wheel	
Power Mix Film		S.21 Plastic Primer	
Power Mix Gun		S.21 Spotblender	
Power Mix Primer		S.21 Zinc-Spray	
Power Mixer (25 ml, 50 ml)		Safety Lens	
Prefill-Spray		Safety Lens Vario	
Prefill-Spray Water		Sanding Block 198 Grip	
Prep & Scuff		Sanding Block 198 Kit	
Prep Hand Cut II		Sanding Block 400 Grip Flex	
Prep Hand II		Sanding Block 400 Grip	
Prep Hand III		Sanding Block Box Grip	04
Prep - Brush	019	Sanding Block Disc Kit 150	04
Primer Spray		Sanding Block Grip	04
Primer Surfacing Spray	119	Sanding Block Hard	04
Protective Film SPF	086	Sanding Block Soft	04
ProFLEX Back Pad PSA	030	Sanding Disc F.19	00
ProFlex Interface Pads	031 - 033	Sanding Disc F.19 Finish	0
ProFLEX Jupiter	020, 021	Sanding Disc F.19 Soft	
ProFlex Jupiter Soft H ₂ O	023	Sanding Disc P.19	00
ProFlex Jupiter H ₂ O	023	Sanding Strips P.19	
ProFLEX Jupiter Soft		Sanding Fleece V.19	
ProFlex Mercury	028	Sanding Water SW20	0
ProFlex Mercury Sanding Block	029	Scraper	
ProFLEX Neptune	026	Seat Covers	
ProFLEX Neptune Pad	027	Safety Coupling	
ProFLEX Neptune Pad MaxGrip	027	Safety Knife	
ProFLEX Neptune Soft		Silicone Remover Mild	
ProFlex Pluto		Silicone Remover Spray	
ProFLEX Pluto Sanding Block		Silicone Remover Water	
ProFlex Saturn	028	Silver Tape	
Pump Spray		Silver Wheel	
Pump for Hand Cleaner 3 I		Slim Tape Green	
Putty Board		Slim Tape	
Putty Knife		Soft Interface Pad	
Putty Mix Board	078	Soft	
		Sound Deadening Panels	
R		Speedmixer 10 kg	
Rallye-Spray gloss	121	Speedmixer 3 kg	
Rallye-Spray matt		Spotblender	
Rallye-Spray Premium gloss		Spotblender Spray	
Rallye-Spray Premium matt		Spray Out Cards Metall	
Refinish 1		Spray Plus	
Refinish Restorer		Spray	
Darelana and Carrell Incel	440	Spray Thinner	

Spray Filler Spray	120
Saueezer	
09000201	172
Star Dust P2	177
Star Mask	176
Star Mask Disc	177
Star Mask Pre P2 R	176
Star Mask Refill	
Steel Bond	
Staub Stop	
Staub Stop Super Wave	
Staub Stop Water Black	
Staub Stop Water	
Steel	
Steering Wheel Covers	093
Stripping Disc	049
Super Nitril Hand I	183
Т	
Tape Off Disc Premium	049
Tape Off Tool	
Tec Line Matt Matting Mousse	
Tec Line Mattflex Pad	018
Tec Line Mattflex Premium	018
Tec Line N20	012
Tec Line Pro Finish	
Tec Line Softflex	
Tec Line Stick	
Thermo-Spray	
Tinting paste filler	
Тор	
Top Tape	088
Topline Soft Pad	015
Topline WP A	
Topline WP S	
Touch Up	
•	
Tripod for LED Lamps	109
U	
U	
UNIFLEX Adapter Nozzle	154
UNIFLEX Air Gun	154
UNIFLEX Glas Fast-Cleaner	
	153
UNIFLEX Glas HM	152
UNIFLEX Glas HMUNIFLEX Glas	152 152
UNIFLEX Glas HM UNIFLEX Glas UNIFLEX Gun	152 152 155
UNIFLEX Glas HMUNIFLEX GlasUNIFLEX GunUNIFLEX GUNUNIFLEX MS	152 152 155 152
	152 152 155 152
UNIFLEX Glas HMUNIFLEX GlasUNIFLEX GunUNIFLEX MSUNIFLEX MSUNIFLEX PU	152 152 155 152
UNIFLEX Glas HM	152 152 155 152 153
UNIFLEX Glas HM	152 155 152 152 153
UNIFLEX Glas HM	152 155 152 152 153 178 102
UNIFLEX Glas HM	152 155 152 152 153 178 102
UNIFLEX Glas HM	152 155 152 153 178 178 102 102
UNIFLEX Glas HM	152 155 155 152 153 178 102 102 102
UNIFLEX Glas HM	152 155 155 152 153 178 102 102 188 166
UNIFLEX Glas HM	152 155 155 152 153 178 102 102 188 166
UNIFLEX Glas HM	152 155 155 152 153 178 102 102 188 166
UNIFLEX Glas HM	152 152 155 152 153 178 102 102 188 188 189
UNIFLEX Glas HM	152 152 155 152 153 178 102 102 188 188 189
UNIFLEX Glas HM	152 152 155 152 152 153 178 102 102 188 188 189
UNIFLEX Glas HM	
UNIFLEX Glas HM UNIFLEX Glas. UNIFLEX Gun UNIFLEX MS UNIFLEX PU UNIFLEX PU UNIFLEX NOZZIE. UV Brille. UV Clear UV Filler Spray UV LED Lamp XL UV Gun Cleaner UV Smart Lamp. UV Timer Wall dispenser for Soft Bottle 2 I Wall Bracket for 5 kg Polish Wax Puck. Work shop seat. Work shop bucket Wheel Cover WK-Lifting Tape Premium	
UNIFLEX Glas HM	

The information is intended as aguide to application and is based on current information. The information is offered in good faith and without guarantee or liability. Product specifications subject to change availability.

©VOSSCHEMIE

KS-2100.

..158

Notes



For more information visit us on: www.carsystem.org





